

MID-CONTINENT ENERGY EXCHANGE

Oil & Gas Asset Auctions



Data Packet

Water Buffalo Unit

MI/RI 7 DUCs + 7 Permits
Eddy County, New Mexico

In this Document:

[Lot Summary](#)

[Permits](#)

[Well Information](#)

[Outgoing Conveyance](#)



Summary

BidEx Lot #7078

Lease Name: Water Buffalo Unit - MI/RI 7 DUCs + 7 Permits
(0.0711 NRA)

County/State: Eddy, NM

Asset Type: Royalty Interest

Legal Description: Sec 1-22S-26E (see outgoing conveyance for full legal description)

API: See below

Net Revenue Interest: 0.0711 NRA

Operator: Permian Resources Operating, LLC

API10	Well Name	Well Number	Well Status	Spud Date
30-015-56103	WATER BUFFALO STATE COM	214H	DUC	8/30/2025
30-015-55970	WATER BUFFALO STATE COM	211H	DUC	9/4/2025
30-015-56123	WATER BUFFALO STATE COM	213H	DUC	8/29/2025
30-015-55965	WATER BUFFALO STATE COM	421H	DUC	9/6/2025
30-015-55972	WATER BUFFALO STATE COM	212H	DUC	9/4/2025
30-015-55967	WATER BUFFALO STATE COM	424H	DUC	8/30/2025
30-015-55966	WATER BUFFALO STATE COM	423H	DUC	8/30/2025
30-015-56151	WATER BUFFALO	133H	Permit	
30-015-55969	WATER BUFFALO STATE COM	131H	Permit	
30-015-55968	WATER BUFFALO	121H	Permit	
30-015-56150	WATER BUFFALO	132H	Permit	
30-015-56111	WATER BUFFALO	124H	Permit	
30-015-56153	WATER BUFFALO	122H	Permit	
30-015-56156	WATER BUFFALO	123H	Permit	

Disclaimer: Bidders must conduct their own due diligence prior to bidding at the auction. Bidders shall rely upon their own evaluations of the properties and not upon any representation either oral or written provided here. This is a summary of information provided by the seller to Mid-Continent Energy Exchange.



Permits



State of New Mexico
 Energy, Minerals and Natural Resources
 Phone: (505) 476-3441
 General Information
 Phone: (505) 629-6116

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

Online Phone Directory Visit:
<https://www.emnrd.nm.gov/ocd/contact-us/>

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		WELL API NO. 30-015-56151
2. Name of Operator Permian Resources Operating, LLC		5. Indicate Type of Lease STATE ☒ FEE ☐
3. Address of Operator 300 N. Marienfeld St Ste 1000 Midland, Texas 79701		6. State Oil & Gas Lease No.
4. Well Location Unit Letter <u>I</u> : <u>2358</u> feet from the <u>South</u> line and <u>316</u> feet from the <u>East</u> line Section <u>3</u> Township <u>22S</u> Range <u>26E</u> NMPM County <u>Eddy</u>		7. Lease Name or Unit Agreement Name Water Buffalo
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3202ft GL		8. Well Number 133H
		9. OGRID Number 372165
		10. Pool name or Wildcat Esperanza; Bone Spring

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐
 CLOSED-LOOP SYSTEM ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Permian Resources Operating, LLC requests permission to make the following changes to the original APD:
 SHL/FTP/LTP/BHL Change, Drilling Program, Acreage Change, Infill/Defining Well

See Page 2 For Additional Details

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Stephanie Rabadue TITLE Regulatory Manager DATE 07/21/2025

Type or print name Stephanie Rabadue E-mail address: stephanie.rabadue@permianres.com PHONE: 432-260-4388

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____
 Conditions of Approval (if any): _____

SHL: Revised

Change From: 2358'FSL & 316'FEL, I-3-22S-26E

Change To: 1656'FSL & 449'FEL, I-3-22S-26E

FTP: Revised

Change From: 1597'FSL & 100'FWL, L-2-22S-26E

Change To: 1640'FSL & 100'FWL, I-1-22S-26E

LTP: Revised

Change From: 1611'FSL & 100'FEL, I-1-22S-26E

Change To: 1640'FSL & 100'FEL, I-1-22S-26E

BHL: Revised

Change From: 1611'FSL & 100'FEL, I-1-22S-26E

Change To: 1640'FSL & 100'FEL, I-1-22S-26E

Acreage: Revised

From: 320

To: 640

Infill/Defining Well:

Change From: Infill

Change To: Defining

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
			☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-015-56151	Pool Code 97755	Pool Name Esperanza; Bone Spring
Property Code 335407	Property Name WATER BUFFALO	Well Number 133H
OGRID No. 372165	Operator Name PERMIAN RESOURCES OPERATING, LLC	Ground Level Elevation 3,203'
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☒ State ☒ Fee ☐ Tribal ☐ Federal

Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	3	22S	26E		2,352' FSL	286' FEL	32.421078°	-104.273001°	EDDY

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	1	22S	26E		1,640' FSL	100' FEL	32.418964°	-104.237863°	EDDY

Dedicated Acres 640	Infill or Defining Well Defining	Defining Well API 30-015-56151	Overlapping Spacing Unit (Y/N) N	Consolidation Code C
Order Numbers.			Well setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	3	22S	26E		2,352' FSL	286' FEL	32.421078°	-104.273001°	EDDY


First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
L	2	22S	26E		1,640' FSL	100' FWL	32.419134°	-104.271792°	EDDY

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	1	22S	26E		1,640' FSL	100' FEL	32.418964°	-104.237863°	EDDY

Unitized Area or Area of Uniform Interest N/A	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation: TBD
---	--	---------------------------------------


OPERATOR CERTIFICATIONS I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division. <i>Stephanie Rabadue</i> 06/24/2025		SURVEYOR CERTIFICATIONS I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  Date: 6/20/2025	
Signature _____ Date _____ Stephanie Rabadue		Signature and Seal of Professional Surveyor	
Printed Name stephanie.rabadue@permianres.com		Certificate Number 12177	Date of Survey 6/20/2025
Email Address			

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

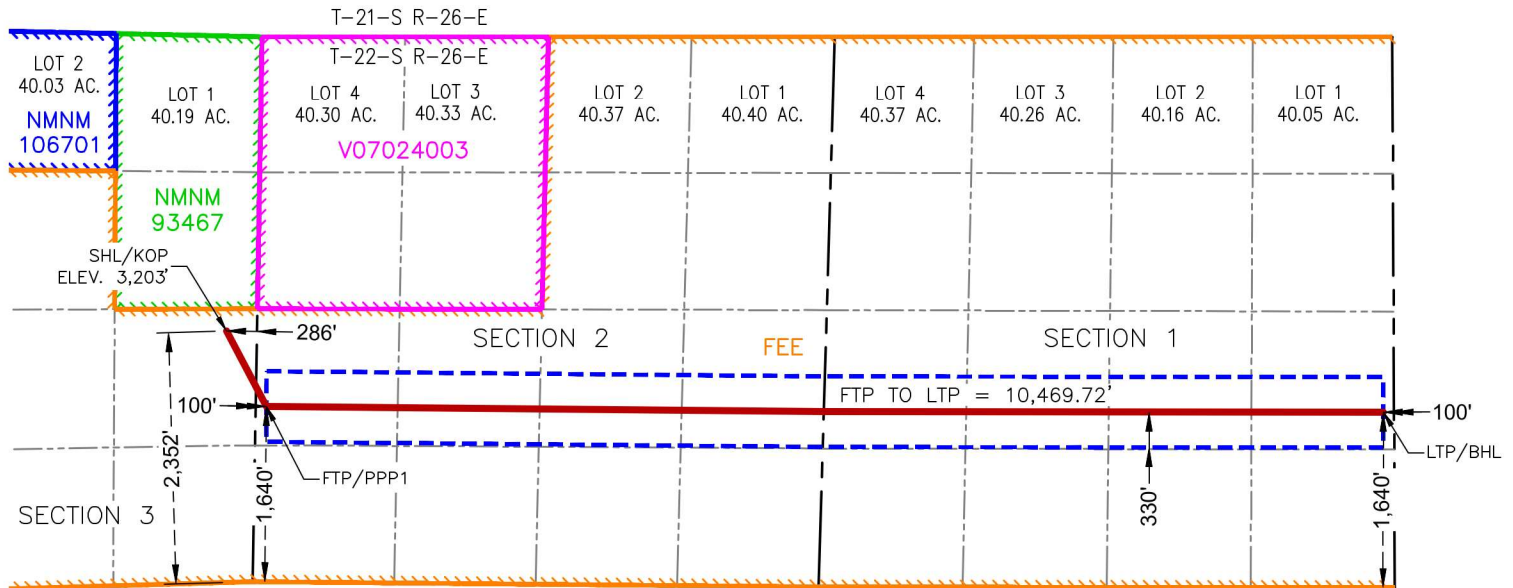WATER BUFFALO 133H

SURFACE HOLE LOCATION
& KICK-OFF POINT
2,352' FSL & 286' FEL
ELEV. = 3,203'

NAD 83 X = 559,953.82'
NAD 83 Y = 516,924.49'
NAD 83 LAT = 32.421078°
NAD 83 LONG = -104.273001°
NAD 27 X = 518,772.86'
NAD 27 Y = 516,864.84'
NAD 27 LAT = 32.420960°
NAD 27 LONG = -104.272495°

FIRST TAKE POINT &
PENETRATION POINT 1
1,640' FSL & 100' FWL

NAD 83 X = 560,327.35'
NAD 83 Y = 516,217.59'
NAD 83 LAT = 32.419134°
NAD 83 LONG = -104.271792°
NAD 27 X = 519,146.37'
NAD 27 Y = 516,157.96'
NAD 27 LAT = 32.419017°
NAD 27 LONG = -104.271286°

LAST TAKE POINT &
BOTTOM HOLE LOCATION
1,640' FSL & 100' FEL

NAD 83 X = 570,796.84'
NAD 83 Y = 516,163.32'
NAD 83 LAT = 32.418964°
NAD 83 LONG = -104.237863°
NAD 27 X = 529,615.68'
NAD 27 Y = 516,103.52'
NAD 27 LAT = 32.418846°
NAD 27 LONG = -104.237358°

Permian Resources - Water Buffalo 133H

1. Geologic Formations

Formation	Elevation	TVD	Target
Rustler	3224	5	No
Top of Salt	2817	412	No
Capitan	2469	760	No
Lamar	1511	1718	No
Bell Canyon	1412	1817	No
Cherry Canyon	825	2404	No
Brushy Canyon	-159	3388	No
Bone Spring	-1710	4934	No
1st Bone Spring	-2861	6090	No
2nd Bone Spring	-3041	6270	No
3rd Bone Spring	-4899	8128	Yes

2. Blowout Prevention

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12.25	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		
8.75	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		

Equipment: BOPE will meet all requirements for above listed system per 43 CFR 3172. BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The system may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional, tested, and will meet all requirements per 43 CFR 3172. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing of the surface x intermediate annulus without breaking the connection between the BOP & wellhead. A variance is requested to utilize a flexible choke line (flexhose) from the BOP to choke manifold.

Requesting Variance? YES

Variance request: Multibowl Wellhead, Flexhose, Breaktesting, Offline Cementing Variances. Attachments in Section 8.

Testing Procedure: Operator requests to ONLY test broken pressure seals per API Standard 53 and the attachments in Section 8. The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed, b. whenever any seal subject to test pressure is broken, c. following related repairs, d. at 21-day intervals. Testing of the ram type preventer(s) and annual type preventer(s) shall be tested per 43 CFR 3172. The BOPE configuration, choke manifold layout, and accumulator system will be in compliance with 43 CFR 3172. Bleed lines will discharge 100' from wellhead in non-H2S scenarios and 150' from wellhead in H2S scenarios.

Choke Diagram Attachemnt: 5M Choke Manifold

BOP Diagram Attachment: BOP Schematic

3. Casing

String	Hole Size	Casing Size	Top	Bottom	Length	Grade	Weight	Connection	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
Surface	17.5	13.375	0	387	387	J55	54.5	BTC	5.91	55.81	Dry	7.51	Dry	7.04
Intermediate	12.25	9.625	0	1818	1818	J55	36	BTC	2.92	1.63	Dry	4.32	Dry	3.81
Production	8.75	5.5	0	8064	8064	P110RY	20	Bushmaster SP	2.39	2.50	Dry	2.38	Dry	2.38
Production	8.5	5.5	8064	18876	10812	P110RY	20	Bushmaster SP	2.39	2.50	Dry	2.38	Dry	2.38
BLM Min Safety Factor									1.125	1		1.6		1.6

Non API casing spec sheets and casing design assumptions attached.

4. Cement

String	Lead/Tail	Top MD	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Surface	Lead	0	300	230	1.88	12.9	420	100%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Surface	Tail	300	387	80	1.34	14.8	100	50%	Class C	Accelerator
Intermediate	Lead	785	1450	180	1.88	12.9	320	50%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Intermediate	Tail	1450	1818	140	1.34	14.8	180	50%	Class C	Retarder
Stage Tool Depth		785								
Intermediate 2nd Stage	Lead	0	285	60	1.88	12.9	100	50%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Intermediate 2nd Stage	Tail	285	785	160	1.33	14.8	200	25%	Class C	Salt
Production	Lead	0	6661	910	2.41	11.5	2190	40%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
Production	Tail	6661	18876	2050	1.73	12.5	3540	25%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder

5. Circulating Medium

Mud System Type: Closed

Will an air or gas system be used: No

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Cuttings Volume: 8690 Cu Ft

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight	Max Weight
0	387	Spud Mud	8.6	9.5
387	1818	Fresh Water	8.6	9.5
1818	8064	OBM	9	10.5
8064	18876	OBM	9	10.5

6. Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY

Coring operation description for the well:

N/A

7. Pressure

Anticipated Bottom Hole Pressure	4640	psi
Anticipated Surface Pressure	2768	psi
Anticipated Bottom Hole Temperature	142	°F
Anticipated Abnormal pressure, temp, or geo hazards	No	

PERMIAN

R E S O U R C E S

NEW MEXICO

(SP) EDDY

WATER BUFFALO

WATER BUFFALO 133H

OWB

Plan: PWP0

Standard Planning Report - Geographic

24 June, 2025

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO 133H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Project	(SP) EDDY		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		WATER BUFFALO			
Site Position:		Northing:	516,263.18 usft	Latitude:	32° 25' 9.336 N
From:	Map	Easting:	559,833.96 usft	Longitude:	104° 16' 24.206 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	WATER BUFFALO 133H					
Well Position	+N/-S	0.0 usft	Northing:	516,924.49 usft	Latitude:	32° 25' 15.880 N
	+E/-W	0.0 usft	Easting:	559,953.82 usft	Longitude:	104° 16' 22.804 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,203.0 usft
Grid Convergence:		0.03 °				

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	8.08	60.30	48,834.32925844

Design	PWP0				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	94.02	

Plan Survey Tool Program	Date	6/24/2025			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	18,876.0 PWP0 (OWB)	MWD		
			OWSG_Rev2_ MWD - Stand		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,390.5	7.81	156.76	1,389.3	-24.4	10.5	2.00	2.00	0.00	156.76	
6,660.8	7.81	156.76	6,610.7	-682.5	293.0	0.00	0.00	0.00	0.00	
7,051.3	0.00	0.00	7,000.0	-706.9	303.5	2.00	-2.00	0.00	180.00	
8,063.8	0.00	0.00	8,012.5	-706.9	303.5	0.00	0.00	0.00	0.00	
8,813.8	90.00	90.30	8,490.0	-709.4	781.0	12.00	12.00	12.04	90.30	
18,876.0	90.00	90.30	8,490.0	-761.2	10,843.0	0.00	0.00	0.00	0.00	LTP/BHL WB 133H

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO 133H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
100.0	0.00	0.00	100.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
200.0	0.00	0.00	200.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
300.0	0.00	0.00	300.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
400.0	0.00	0.00	400.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
500.0	0.00	0.00	500.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
600.0	0.00	0.00	600.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
700.0	0.00	0.00	700.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
800.0	0.00	0.00	800.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
900.0	0.00	0.00	900.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	516,924.49	559,953.82	32° 25' 15.880 N	104° 16' 22.804 W
Start Build 2.00									
1,100.0	2.00	156.76	1,100.0	-1.6	0.7	516,922.89	559,954.51	32° 25' 15.864 N	104° 16' 22.796 W
1,200.0	4.00	156.76	1,199.8	-6.4	2.8	516,918.08	559,956.58	32° 25' 15.816 N	104° 16' 22.772 W
1,300.0	6.00	156.76	1,299.5	-14.4	6.2	516,910.07	559,960.01	32° 25' 15.737 N	104° 16' 22.732 W
1,390.5	7.81	156.76	1,389.3	-24.4	10.5	516,900.08	559,964.31	32° 25' 15.638 N	104° 16' 22.682 W
Start 5270.3 hold at 1390.5 MD									
1,400.0	7.81	156.76	1,398.7	-25.6	11.0	516,898.89	559,964.82	32° 25' 15.626 N	104° 16' 22.676 W
1,500.0	7.81	156.76	1,497.8	-38.1	16.4	516,886.40	559,970.18	32° 25' 15.503 N	104° 16' 22.613 W
1,600.0	7.81	156.76	1,596.8	-50.6	21.7	516,873.91	559,975.54	32° 25' 15.379 N	104° 16' 22.551 W
1,700.0	7.81	156.76	1,695.9	-63.1	27.1	516,861.43	559,980.90	32° 25' 15.255 N	104° 16' 22.488 W
1,800.0	7.81	156.76	1,795.0	-75.5	32.4	516,848.94	559,986.26	32° 25' 15.132 N	104° 16' 22.426 W
1,900.0	7.81	156.76	1,894.1	-88.0	37.8	516,836.46	559,991.62	32° 25' 15.008 N	104° 16' 22.363 W
2,000.0	7.81	156.76	1,993.1	-100.5	43.2	516,823.97	559,996.98	32° 25' 14.885 N	104° 16' 22.301 W
2,100.0	7.81	156.76	2,092.2	-113.0	48.5	516,811.48	560,002.34	32° 25' 14.761 N	104° 16' 22.238 W
2,200.0	7.81	156.76	2,191.3	-125.5	53.9	516,799.00	560,007.70	32° 25' 14.637 N	104° 16' 22.176 W
2,300.0	7.81	156.76	2,290.4	-138.0	59.2	516,786.51	560,013.06	32° 25' 14.514 N	104° 16' 22.113 W
2,400.0	7.81	156.76	2,389.4	-150.5	64.6	516,774.02	560,018.42	32° 25' 14.390 N	104° 16' 22.051 W
2,500.0	7.81	156.76	2,488.5	-163.0	70.0	516,761.54	560,023.78	32° 25' 14.267 N	104° 16' 21.989 W
2,600.0	7.81	156.76	2,587.6	-175.4	75.3	516,749.05	560,029.15	32° 25' 14.143 N	104° 16' 21.926 W
2,700.0	7.81	156.76	2,686.6	-187.9	80.7	516,736.57	560,034.51	32° 25' 14.019 N	104° 16' 21.864 W
2,800.0	7.81	156.76	2,785.7	-200.4	86.0	516,724.08	560,039.87	32° 25' 13.896 N	104° 16' 21.801 W
2,900.0	7.81	156.76	2,884.8	-212.9	91.4	516,711.59	560,045.23	32° 25' 13.772 N	104° 16' 21.739 W
3,000.0	7.81	156.76	2,983.9	-225.4	96.8	516,699.11	560,050.59	32° 25' 13.649 N	104° 16' 21.676 W
3,100.0	7.81	156.76	3,082.9	-237.9	102.1	516,686.62	560,055.95	32° 25' 13.525 N	104° 16' 21.614 W
3,200.0	7.81	156.76	3,182.0	-250.4	107.5	516,674.13	560,061.31	32° 25' 13.401 N	104° 16' 21.551 W
3,300.0	7.81	156.76	3,281.1	-262.8	112.8	516,661.65	560,066.67	32° 25' 13.278 N	104° 16' 21.489 W
3,400.0	7.81	156.76	3,380.2	-275.3	118.2	516,649.16	560,072.03	32° 25' 13.154 N	104° 16' 21.426 W
3,500.0	7.81	156.76	3,479.2	-287.8	123.6	516,636.68	560,077.39	32° 25' 13.031 N	104° 16' 21.364 W
3,600.0	7.81	156.76	3,578.3	-300.3	128.9	516,624.19	560,082.75	32° 25' 12.907 N	104° 16' 21.301 W
3,700.0	7.81	156.76	3,677.4	-312.8	134.3	516,611.70	560,088.11	32° 25' 12.783 N	104° 16' 21.239 W
3,800.0	7.81	156.76	3,776.4	-325.3	139.7	516,599.22	560,093.48	32° 25' 12.660 N	104° 16' 21.177 W
3,900.0	7.81	156.76	3,875.5	-337.8	145.0	516,586.73	560,098.84	32° 25' 12.536 N	104° 16' 21.114 W
4,000.0	7.81	156.76	3,974.6	-350.2	150.4	516,574.24	560,104.20	32° 25' 12.413 N	104° 16' 21.052 W
4,100.0	7.81	156.76	4,073.7	-362.7	155.7	516,561.76	560,109.56	32° 25' 12.289 N	104° 16' 20.989 W
4,200.0	7.81	156.76	4,172.7	-375.2	161.1	516,549.27	560,114.92	32° 25' 12.166 N	104° 16' 20.927 W
4,300.0	7.81	156.76	4,271.8	-387.7	166.5	516,536.79	560,120.28	32° 25' 12.042 N	104° 16' 20.864 W
4,400.0	7.81	156.76	4,370.9	-400.2	171.8	516,524.30	560,125.64	32° 25' 11.918 N	104° 16' 20.802 W
4,500.0	7.81	156.76	4,470.0	-412.7	177.2	516,511.81	560,131.00	32° 25' 11.795 N	104° 16' 20.739 W
4,600.0	7.81	156.76	4,569.0	-425.2	182.5	516,499.33	560,136.36	32° 25' 11.671 N	104° 16' 20.677 W
4,700.0	7.81	156.76	4,668.1	-437.7	187.9	516,486.84	560,141.72	32° 25' 11.548 N	104° 16' 20.614 W
4,800.0	7.81	156.76	4,767.2	-450.1	193.3	516,474.35	560,147.08	32° 25' 11.424 N	104° 16' 20.552 W
4,900.0	7.81	156.76	4,866.2	-462.6	198.6	516,461.87	560,152.45	32° 25' 11.300 N	104° 16' 20.489 W
5,000.0	7.81	156.76	4,965.3	-475.1	204.0	516,449.38	560,157.81	32° 25' 11.177 N	104° 16' 20.427 W

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO 133H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured			Vertical			Map		Map		
Depth (usft)	Inclination (°)	Azimuth (°)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
5,100.0	7.81	156.76	5,064.4	-487.6	209.3	516,436.90	560,163.17	32° 25' 11.053 N	104° 16' 20.365 W	
5,200.0	7.81	156.76	5,163.5	-500.1	214.7	516,424.41	560,168.53	32° 25' 10.930 N	104° 16' 20.302 W	
5,300.0	7.81	156.76	5,262.5	-512.6	220.1	516,411.92	560,173.89	32° 25' 10.806 N	104° 16' 20.240 W	
5,400.0	7.81	156.76	5,361.6	-525.1	225.4	516,399.44	560,179.25	32° 25' 10.682 N	104° 16' 20.177 W	
5,500.0	7.81	156.76	5,460.7	-537.5	230.8	516,386.95	560,184.61	32° 25' 10.559 N	104° 16' 20.115 W	
5,600.0	7.81	156.76	5,559.7	-550.0	236.1	516,374.46	560,189.97	32° 25' 10.435 N	104° 16' 20.052 W	
5,700.0	7.81	156.76	5,658.8	-562.5	241.5	516,361.98	560,195.33	32° 25' 10.312 N	104° 16' 19.990 W	
5,800.0	7.81	156.76	5,757.9	-575.0	246.9	516,349.49	560,200.69	32° 25' 10.188 N	104° 16' 19.927 W	
5,900.0	7.81	156.76	5,857.0	-587.5	252.2	516,337.01	560,206.05	32° 25' 10.064 N	104° 16' 19.865 W	
6,000.0	7.81	156.76	5,956.0	-600.0	257.6	516,324.52	560,211.41	32° 25' 9.941 N	104° 16' 19.802 W	
6,100.0	7.81	156.76	6,055.1	-612.5	263.0	516,312.03	560,216.78	32° 25' 9.817 N	104° 16' 19.740 W	
6,200.0	7.81	156.76	6,154.2	-624.9	268.3	516,299.55	560,222.14	32° 25' 9.694 N	104° 16' 19.677 W	
6,300.0	7.81	156.76	6,253.3	-637.4	273.7	516,287.06	560,227.50	32° 25' 9.570 N	104° 16' 19.615 W	
6,400.0	7.81	156.76	6,352.3	-649.9	279.0	516,274.57	560,232.86	32° 25' 9.447 N	104° 16' 19.553 W	
6,500.0	7.81	156.76	6,451.4	-662.4	284.4	516,262.09	560,238.22	32° 25' 9.323 N	104° 16' 19.490 W	
6,600.0	7.81	156.76	6,550.5	-674.9	289.8	516,249.60	560,243.58	32° 25' 9.199 N	104° 16' 19.428 W	
6,660.8	7.81	156.76	6,610.7	-682.5	293.0	516,242.01	560,246.84	32° 25' 9.124 N	104° 16' 19.390 W	
Start Drop -2.00										
6,700.0	7.03	156.76	6,649.6	-687.1	295.0	516,237.36	560,248.84	32° 25' 9.078 N	104° 16' 19.366 W	
6,800.0	5.03	156.76	6,749.0	-696.8	299.2	516,227.71	560,252.98	32° 25' 8.983 N	104° 16' 19.318 W	
6,900.0	3.03	156.76	6,848.8	-703.2	301.9	516,221.26	560,255.75	32° 25' 8.919 N	104° 16' 19.286 W	
7,000.0	1.03	156.76	6,948.7	-706.5	303.3	516,218.01	560,257.14	32° 25' 8.887 N	104° 16' 19.270 W	
7,051.3	0.00	0.00	7,000.0	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
Start 1012.5 hold at 7051.3 MD										
7,100.0	0.00	0.00	7,048.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,200.0	0.00	0.00	7,148.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,300.0	0.00	0.00	7,248.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,400.0	0.00	0.00	7,348.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,500.0	0.00	0.00	7,448.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,600.0	0.00	0.00	7,548.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,700.0	0.00	0.00	7,648.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,800.0	0.00	0.00	7,748.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
7,900.0	0.00	0.00	7,848.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
8,000.0	0.00	0.00	7,948.7	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
8,063.8	0.00	0.00	8,012.5	-706.9	303.5	516,217.59	560,257.32	32° 25' 8.883 N	104° 16' 19.267 W	
Start DLS 12.00 TFO 90.30										
8,075.0	1.34	90.30	8,023.7	-706.9	303.6	516,217.59	560,257.45	32° 25' 8.883 N	104° 16' 19.266 W	
8,100.0	4.34	90.30	8,048.7	-706.9	304.9	516,217.58	560,258.69	32° 25' 8.882 N	104° 16' 19.251 W	
8,125.0	7.34	90.30	8,073.5	-706.9	307.4	516,217.57	560,261.24	32° 25' 8.882 N	104° 16' 19.222 W	
8,150.0	10.34	90.30	8,098.2	-706.9	311.3	516,217.55	560,265.08	32° 25' 8.882 N	104° 16' 19.177 W	
8,175.0	13.34	90.30	8,122.7	-707.0	316.4	516,217.53	560,270.21	32° 25' 8.882 N	104° 16' 19.117 W	
8,200.0	16.34	90.30	8,146.9	-707.0	322.8	516,217.49	560,276.62	32° 25' 8.881 N	104° 16' 19.042 W	
8,225.0	19.34	90.30	8,170.7	-707.0	330.5	516,217.45	560,284.28	32° 25' 8.881 N	104° 16' 18.953 W	
8,250.0	22.34	90.30	8,194.0	-707.1	339.3	516,217.41	560,293.17	32° 25' 8.880 N	104° 16' 18.849 W	
8,275.0	25.34	90.30	8,216.9	-707.1	349.5	516,217.35	560,303.28	32° 25' 8.880 N	104° 16' 18.731 W	
8,300.0	28.34	90.30	8,239.2	-707.2	360.7	516,217.30	560,314.56	32° 25' 8.879 N	104° 16' 18.600 W	
8,325.0	31.34	90.30	8,260.9	-707.3	373.2	516,217.23	560,327.00	32° 25' 8.879 N	104° 16' 18.455 W	
8,350.0	34.34	90.30	8,281.9	-707.3	386.7	516,217.16	560,340.56	32° 25' 8.878 N	104° 16' 18.296 W	
8,375.0	37.34	90.30	8,302.1	-707.4	401.4	516,217.09	560,355.20	32° 25' 8.877 N	104° 16' 18.126 W	
8,400.0	40.34	90.30	8,321.6	-707.5	417.1	516,217.01	560,370.88	32° 25' 8.876 N	104° 16' 17.943 W	
8,425.0	43.34	90.30	8,340.2	-707.6	433.7	516,216.92	560,387.55	32° 25' 8.875 N	104° 16' 17.748 W	
8,450.0	46.34	90.30	8,357.9	-707.7	451.4	516,216.83	560,405.18	32° 25' 8.874 N	104° 16' 17.543 W	
8,475.0	49.34	90.30	8,374.7	-707.8	469.9	516,216.73	560,423.71	32° 25' 8.873 N	104° 16' 17.326 W	
FTP WB 133H										

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO 133H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
8,500.0	52.34	90.30	8,390.5	-707.9	489.3	516,216.63	560,443.09	32° 25' 8.872 N	104° 16' 17.100 W	
8,525.0	55.34	90.30	8,405.3	-708.0	509.5	516,216.53	560,463.28	32° 25' 8.871 N	104° 16' 16.865 W	
8,550.0	58.34	90.30	8,418.9	-708.1	530.4	516,216.42	560,484.20	32° 25' 8.870 N	104° 16' 16.621 W	
8,575.0	61.34	90.30	8,431.5	-708.2	552.0	516,216.31	560,505.82	32° 25' 8.868 N	104° 16' 16.368 W	
8,600.0	64.34	90.30	8,442.9	-708.3	574.2	516,216.20	560,528.06	32° 25' 8.867 N	104° 16' 16.109 W	
8,625.0	67.34	90.30	8,453.1	-708.4	597.0	516,216.08	560,550.87	32° 25' 8.866 N	104° 16' 15.843 W	
8,650.0	70.34	90.30	8,462.1	-708.5	620.4	516,215.96	560,574.18	32° 25' 8.865 N	104° 16' 15.571 W	
8,675.0	73.34	90.30	8,469.9	-708.7	644.1	516,215.84	560,597.93	32° 25' 8.863 N	104° 16' 15.294 W	
8,700.0	76.34	90.30	8,476.5	-708.8	668.2	516,215.71	560,622.06	32° 25' 8.862 N	104° 16' 15.012 W	
8,725.0	79.34	90.30	8,481.7	-708.9	692.7	516,215.59	560,646.49	32° 25' 8.860 N	104° 16' 14.727 W	
8,750.0	82.34	90.30	8,485.7	-709.0	717.3	516,215.46	560,671.17	32° 25' 8.859 N	104° 16' 14.439 W	
8,775.0	85.34	90.30	8,488.4	-709.2	742.2	516,215.33	560,696.02	32° 25' 8.858 N	104° 16' 14.149 W	
8,800.0	88.34	90.30	8,489.8	-709.3	767.2	516,215.20	560,720.98	32° 25' 8.856 N	104° 16' 13.858 W	
8,813.8	90.00	90.30	8,490.0	-709.4	781.0	516,215.13	560,734.78	32° 25' 8.855 N	104° 16' 13.697 W	
Start 10062.2 hold at 8813.8 MD										
8,900.0	90.00	90.30	8,490.0	-709.8	867.2	516,214.69	560,820.98	32° 25' 8.851 N	104° 16' 12.691 W	
9,000.0	90.00	90.30	8,490.0	-710.3	967.2	516,214.17	560,920.98	32° 25' 8.845 N	104° 16' 11.525 W	
9,100.0	90.00	90.30	8,490.0	-710.8	1,067.2	516,213.66	561,020.98	32° 25' 8.839 N	104° 16' 10.358 W	
9,200.0	90.00	90.30	8,490.0	-711.3	1,167.2	516,213.14	561,120.98	32° 25' 8.833 N	104° 16' 9.192 W	
9,300.0	90.00	90.30	8,490.0	-711.9	1,267.2	516,212.63	561,220.97	32° 25' 8.828 N	104° 16' 8.025 W	
9,400.0	90.00	90.30	8,490.0	-712.4	1,367.2	516,212.11	561,320.97	32° 25' 8.822 N	104° 16' 6.858 W	
9,500.0	90.00	90.30	8,490.0	-712.9	1,467.1	516,211.60	561,420.97	32° 25' 8.816 N	104° 16' 5.692 W	
9,600.0	90.00	90.30	8,490.0	-713.4	1,567.1	516,211.08	561,520.97	32° 25' 8.811 N	104° 16' 4.525 W	
9,700.0	90.00	90.30	8,490.0	-713.9	1,667.1	516,210.57	561,620.97	32° 25' 8.805 N	104° 16' 3.358 W	
9,800.0	90.00	90.30	8,490.0	-714.4	1,767.1	516,210.05	561,720.97	32° 25' 8.799 N	104° 16' 2.192 W	
9,900.0	90.00	90.30	8,490.0	-715.0	1,867.1	516,209.54	561,820.97	32° 25' 8.794 N	104° 16' 1.025 W	
10,000.0	90.00	90.30	8,490.0	-715.5	1,967.1	516,209.03	561,920.97	32° 25' 8.788 N	104° 15' 59.858 W	
10,100.0	90.00	90.30	8,490.0	-716.0	2,067.1	516,208.51	562,020.96	32° 25' 8.782 N	104° 15' 58.692 W	
10,200.0	90.00	90.30	8,490.0	-716.5	2,167.1	516,208.00	562,120.96	32° 25' 8.776 N	104° 15' 57.525 W	
10,300.0	90.00	90.30	8,490.0	-717.0	2,267.1	516,207.48	562,220.96	32° 25' 8.771 N	104° 15' 56.358 W	
10,400.0	90.00	90.30	8,490.0	-717.5	2,367.1	516,206.97	562,320.96	32° 25' 8.765 N	104° 15' 55.192 W	
10,500.0	90.00	90.30	8,490.0	-718.0	2,467.1	516,206.45	562,420.96	32° 25' 8.759 N	104° 15' 54.025 W	
10,600.0	90.00	90.30	8,490.0	-718.6	2,567.1	516,205.94	562,520.96	32° 25' 8.754 N	104° 15' 52.858 W	
10,700.0	90.00	90.30	8,490.0	-719.1	2,667.1	516,205.42	562,620.96	32° 25' 8.748 N	104° 15' 51.692 W	
10,800.0	90.00	90.30	8,490.0	-719.6	2,767.1	516,204.91	562,720.95	32° 25' 8.742 N	104° 15' 50.525 W	
10,900.0	90.00	90.30	8,490.0	-720.1	2,867.1	516,204.39	562,820.95	32° 25' 8.736 N	104° 15' 49.358 W	
11,000.0	90.00	90.30	8,490.0	-720.6	2,967.1	516,203.88	562,920.95	32° 25' 8.731 N	104° 15' 48.192 W	
11,100.0	90.00	90.30	8,490.0	-721.1	3,067.1	516,203.36	563,020.95	32° 25' 8.725 N	104° 15' 47.025 W	
11,200.0	90.00	90.30	8,490.0	-721.6	3,167.1	516,202.85	563,120.95	32° 25' 8.719 N	104° 15' 45.858 W	
11,300.0	90.00	90.30	8,490.0	-722.2	3,267.1	516,202.33	563,220.95	32° 25' 8.713 N	104° 15' 44.692 W	
11,400.0	90.00	90.30	8,490.0	-722.7	3,367.1	516,201.82	563,320.95	32° 25' 8.708 N	104° 15' 43.525 W	
11,500.0	90.00	90.30	8,490.0	-723.2	3,467.1	516,201.30	563,420.95	32° 25' 8.702 N	104° 15' 42.358 W	
11,600.0	90.00	90.30	8,490.0	-723.7	3,567.1	516,200.79	563,520.94	32° 25' 8.696 N	104° 15' 41.192 W	
11,700.0	90.00	90.30	8,490.0	-724.2	3,667.1	516,200.27	563,620.94	32° 25' 8.690 N	104° 15' 40.025 W	
11,800.0	90.00	90.30	8,490.0	-724.7	3,767.1	516,199.76	563,720.94	32° 25' 8.685 N	104° 15' 38.859 W	
11,900.0	90.00	90.30	8,490.0	-725.2	3,867.1	516,199.24	563,820.94	32° 25' 8.679 N	104° 15' 37.692 W	
12,000.0	90.00	90.30	8,490.0	-725.8	3,967.1	516,198.73	563,920.94	32° 25' 8.673 N	104° 15' 36.525 W	
12,100.0	90.00	90.30	8,490.0	-726.3	4,067.1	516,198.21	564,020.94	32° 25' 8.667 N	104° 15' 35.359 W	
12,200.0	90.00	90.30	8,490.0	-726.8	4,167.1	516,197.70	564,120.94	32° 25' 8.661 N	104° 15' 34.192 W	
12,300.0	90.00	90.30	8,490.0	-727.3	4,267.1	516,197.18	564,220.93	32° 25' 8.656 N	104° 15' 33.025 W	
12,400.0	90.00	90.30	8,490.0	-727.8	4,367.1	516,196.67	564,320.93	32° 25' 8.650 N	104° 15' 31.859 W	
12,500.0	90.00	90.30	8,490.0	-728.3	4,467.1	516,196.15	564,420.93	32° 25' 8.644 N	104° 15' 30.692 W	
12,600.0	90.00	90.30	8,490.0	-728.9	4,567.1	516,195.64	564,520.93	32° 25' 8.638 N	104° 15' 29.525 W	
12,700.0	90.00	90.30	8,490.0	-729.4	4,667.1	516,195.12	564,620.93	32° 25' 8.633 N	104° 15' 28.359 W	

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO 133H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
12,800.0	90.00	90.30	8,490.0	-729.9	4,767.1	516,194.61	564,720.93	32° 25' 8.627 N	104° 15' 27.192 W	
12,900.0	90.00	90.30	8,490.0	-730.4	4,867.1	516,194.09	564,820.93	32° 25' 8.621 N	104° 15' 26.025 W	
13,000.0	90.00	90.30	8,490.0	-730.9	4,967.1	516,193.58	564,920.93	32° 25' 8.615 N	104° 15' 24.859 W	
13,100.0	90.00	90.30	8,490.0	-731.4	5,067.1	516,193.06	565,020.92	32° 25' 8.609 N	104° 15' 23.692 W	
13,200.0	90.00	90.30	8,490.0	-731.9	5,167.1	516,192.55	565,120.92	32° 25' 8.604 N	104° 15' 22.525 W	
13,300.0	90.00	90.30	8,490.0	-732.5	5,267.1	516,192.03	565,220.92	32° 25' 8.598 N	104° 15' 21.359 W	
13,400.0	90.00	90.30	8,490.0	-733.0	5,367.1	516,191.52	565,320.92	32° 25' 8.592 N	104° 15' 20.192 W	
13,500.0	90.00	90.30	8,490.0	-733.5	5,467.1	516,191.00	565,420.92	32° 25' 8.586 N	104° 15' 19.025 W	
13,600.0	90.00	90.30	8,490.0	-734.0	5,567.1	516,190.49	565,520.92	32° 25' 8.580 N	104° 15' 17.859 W	
13,700.0	90.00	90.30	8,490.0	-734.5	5,667.1	516,189.97	565,620.92	32° 25' 8.574 N	104° 15' 16.692 W	
13,800.0	90.00	90.30	8,490.0	-735.0	5,767.1	516,189.46	565,720.92	32° 25' 8.569 N	104° 15' 15.526 W	
13,900.0	90.00	90.30	8,490.0	-735.5	5,867.1	516,188.94	565,820.91	32° 25' 8.563 N	104° 15' 14.359 W	
14,000.0	90.00	90.30	8,490.0	-736.1	5,967.1	516,188.43	565,920.91	32° 25' 8.557 N	104° 15' 13.192 W	
14,100.0	90.00	90.30	8,490.0	-736.6	6,067.1	516,187.91	566,020.91	32° 25' 8.551 N	104° 15' 12.026 W	
14,200.0	90.00	90.30	8,490.0	-737.1	6,167.1	516,187.40	566,120.91	32° 25' 8.545 N	104° 15' 10.859 W	
14,300.0	90.00	90.30	8,490.0	-737.6	6,267.1	516,186.88	566,220.91	32° 25' 8.539 N	104° 15' 9.692 W	
14,400.0	90.00	90.30	8,490.0	-738.1	6,367.1	516,186.37	566,320.91	32° 25' 8.534 N	104° 15' 8.526 W	
14,500.0	90.00	90.30	8,490.0	-738.6	6,467.1	516,185.85	566,420.91	32° 25' 8.528 N	104° 15' 7.359 W	
14,600.0	90.00	90.30	8,490.0	-739.2	6,567.1	516,185.34	566,520.90	32° 25' 8.522 N	104° 15' 6.192 W	
14,700.0	90.00	90.30	8,490.0	-739.7	6,667.1	516,184.82	566,620.90	32° 25' 8.516 N	104° 15' 5.026 W	
14,800.0	90.00	90.30	8,490.0	-740.2	6,767.1	516,184.31	566,720.90	32° 25' 8.510 N	104° 15' 3.859 W	
14,900.0	90.00	90.30	8,490.0	-740.7	6,867.1	516,183.79	566,820.90	32° 25' 8.504 N	104° 15' 2.692 W	
15,000.0	90.00	90.30	8,490.0	-741.2	6,967.1	516,183.28	566,920.90	32° 25' 8.498 N	104° 15' 1.526 W	
15,100.0	90.00	90.30	8,490.0	-741.7	7,067.1	516,182.76	567,020.90	32° 25' 8.493 N	104° 15' 0.359 W	
15,200.0	90.00	90.30	8,490.0	-742.2	7,167.1	516,182.25	567,120.90	32° 25' 8.487 N	104° 14' 59.192 W	
15,300.0	90.00	90.30	8,490.0	-742.8	7,267.1	516,181.73	567,220.90	32° 25' 8.481 N	104° 14' 58.026 W	
15,400.0	90.00	90.30	8,490.0	-743.3	7,367.1	516,181.22	567,320.89	32° 25' 8.475 N	104° 14' 56.859 W	
15,500.0	90.00	90.30	8,490.0	-743.8	7,467.1	516,180.70	567,420.89	32° 25' 8.469 N	104° 14' 55.692 W	
15,600.0	90.00	90.30	8,490.0	-744.3	7,567.1	516,180.19	567,520.89	32° 25' 8.463 N	104° 14' 54.526 W	
15,700.0	90.00	90.30	8,490.0	-744.8	7,667.1	516,179.68	567,620.89	32° 25' 8.457 N	104° 14' 53.359 W	
15,800.0	90.00	90.30	8,490.0	-745.3	7,767.1	516,179.16	567,720.89	32° 25' 8.451 N	104° 14' 52.192 W	
15,900.0	90.00	90.30	8,490.0	-745.8	7,867.1	516,178.65	567,820.89	32° 25' 8.446 N	104° 14' 51.026 W	
16,000.0	90.00	90.30	8,490.0	-746.4	7,967.1	516,178.13	567,920.89	32° 25' 8.440 N	104° 14' 49.859 W	
16,100.0	90.00	90.30	8,490.0	-746.9	8,067.1	516,177.62	568,020.88	32° 25' 8.434 N	104° 14' 48.693 W	
16,200.0	90.00	90.30	8,490.0	-747.4	8,167.1	516,177.10	568,120.88	32° 25' 8.428 N	104° 14' 47.526 W	
16,300.0	90.00	90.30	8,490.0	-747.9	8,267.1	516,176.59	568,220.88	32° 25' 8.422 N	104° 14' 46.359 W	
16,400.0	90.00	90.30	8,490.0	-748.4	8,367.1	516,176.07	568,320.88	32° 25' 8.416 N	104° 14' 45.193 W	
16,500.0	90.00	90.30	8,490.0	-748.9	8,467.1	516,175.56	568,420.88	32° 25' 8.410 N	104° 14' 44.026 W	
16,600.0	90.00	90.30	8,490.0	-749.5	8,567.1	516,175.04	568,520.88	32° 25' 8.404 N	104° 14' 42.859 W	
16,700.0	90.00	90.30	8,490.0	-750.0	8,667.1	516,174.53	568,620.88	32° 25' 8.398 N	104° 14' 41.693 W	
16,800.0	90.00	90.30	8,490.0	-750.5	8,767.1	516,174.01	568,720.88	32° 25' 8.392 N	104° 14' 40.526 W	
16,900.0	90.00	90.30	8,490.0	-751.0	8,867.1	516,173.50	568,820.87	32° 25' 8.387 N	104° 14' 39.359 W	
17,000.0	90.00	90.30	8,490.0	-751.5	8,967.0	516,172.98	568,920.87	32° 25' 8.381 N	104° 14' 38.193 W	
17,100.0	90.00	90.30	8,490.0	-752.0	9,067.0	516,172.47	569,020.87	32° 25' 8.375 N	104° 14' 37.026 W	
17,200.0	90.00	90.30	8,490.0	-752.5	9,167.0	516,171.95	569,120.87	32° 25' 8.369 N	104° 14' 35.859 W	
17,300.0	90.00	90.30	8,490.0	-753.1	9,267.0	516,171.44	569,220.87	32° 25' 8.363 N	104° 14' 34.693 W	
17,400.0	90.00	90.30	8,490.0	-753.6	9,367.0	516,170.92	569,320.87	32° 25' 8.357 N	104° 14' 33.526 W	
17,500.0	90.00	90.30	8,490.0	-754.1	9,467.0	516,170.41	569,420.87	32° 25' 8.351 N	104° 14' 32.359 W	
17,600.0	90.00	90.30	8,490.0	-754.6	9,567.0	516,169.89	569,520.86	32° 25' 8.345 N	104° 14' 31.193 W	
17,700.0	90.00	90.30	8,490.0	-755.1	9,667.0	516,169.38	569,620.86	32° 25' 8.339 N	104° 14' 30.026 W	
17,800.0	90.00	90.30	8,490.0	-755.6	9,767.0	516,168.86	569,720.86	32° 25' 8.333 N	104° 14' 28.859 W	
17,900.0	90.00	90.30	8,490.0	-756.1	9,867.0	516,168.35	569,820.86	32° 25' 8.327 N	104° 14' 27.693 W	
18,000.0	90.00	90.30	8,490.0	-756.7	9,967.0	516,167.83	569,920.86	32° 25' 8.321 N	104° 14' 26.526 W	
18,100.0	90.00	90.30	8,490.0	-757.2	10,067.0	516,167.32	570,020.86	32° 25' 8.315 N	104° 14' 25.360 W	
18,200.0	90.00	90.30	8,490.0	-757.7	10,167.0	516,166.80	570,120.86	32° 25' 8.309 N	104° 14' 24.193 W	

PERMIAN


RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO 133H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
18,300.0	90.00	90.30	8,490.0	-758.2	10,267.0	516,166.29	570,220.86	32° 25' 8.303 N	104° 14' 23.026 W	
18,400.0	90.00	90.30	8,490.0	-758.7	10,367.0	516,165.77	570,320.85	32° 25' 8.297 N	104° 14' 21.860 W	
18,500.0	90.00	90.30	8,490.0	-759.2	10,467.0	516,165.26	570,420.85	32° 25' 8.291 N	104° 14' 20.693 W	
18,600.0	90.00	90.30	8,490.0	-759.7	10,567.0	516,164.74	570,520.85	32° 25' 8.285 N	104° 14' 19.526 W	
18,700.0	90.00	90.30	8,490.0	-760.3	10,667.0	516,164.23	570,620.85	32° 25' 8.279 N	104° 14' 18.360 W	
18,800.0	90.00	90.30	8,490.0	-760.8	10,767.0	516,163.71	570,720.85	32° 25' 8.274 N	104° 14' 17.193 W	
18,876.0	90.00	90.30	8,490.0	-761.2	10,843.0	516,163.32	570,796.84	32° 25' 8.269 N	104° 14' 16.306 W	
TD at 18876.0 - LTP/BHL WB 133H										

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
LTP/BHL WB 133H - plan hits target center - Point	0.00	0.00	8,490.0	-761.2	10,843.0	516,163.32	570,796.84	32° 25' 8.269 N	104° 14' 16.306 W	
FTP WB 133H - plan misses target center by 150.2usft at 8475.0usft MD (8374.7 TVD, -707.8 N, 469.9 E) - Point	0.00	0.00	8,490.0	-706.9	373.5	516,217.59	560,327.35	32° 25' 8.882 N	104° 16' 18.450 W	

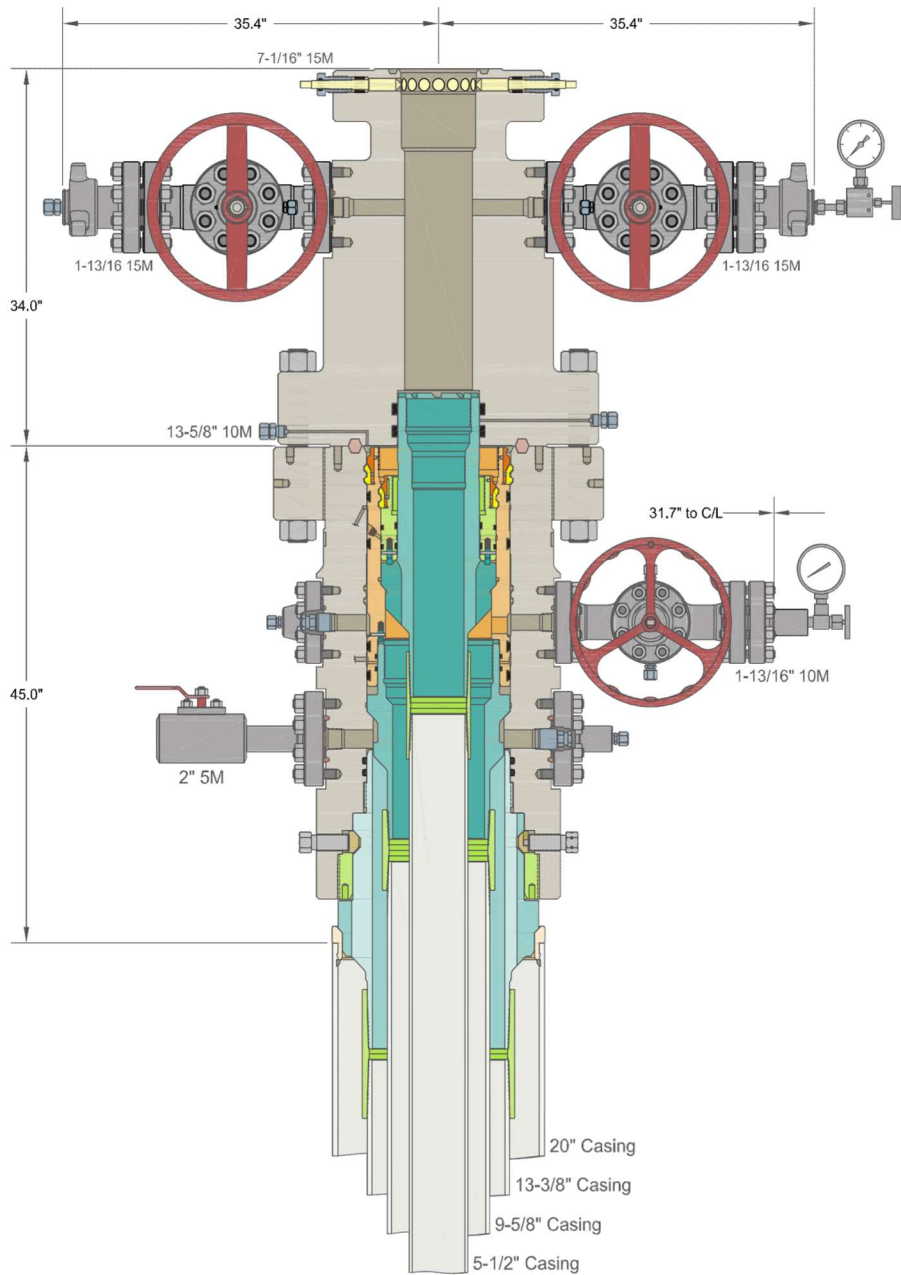

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC		CENTENNIAL RESOURCE DEVELOPMENT LEE CO, NM	
20" x 13-3/8" x 9-5/8" x 5-1/2" 10M MBU-3T-CFL-R-DBLO System With 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head, 20" Landing Ring & Pin Down Mandrel Casing Hangers		DRAWN	DLE
		APPRV	10JUN20
		DRAWING NO.	HBE0000338

Permian Resources

Multi-Well Pad Batch Drilling Procedure

Surface Casing - PR intends to Batch set all surface casing to a depth approved in the APD. Surface Holes will be batch drilled by a rig. Appropriate notifications will be made prior to spudding the well, running and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill Surface hole to Approved Depth with Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run and land planned surface casing see Illustration 1-1 Below to depth approved in APD.
3. Set packoff and test to 5k psi
4. Offline Cement
5. Install wellhead with pressure gauge and nightcap. Nightcap is shown on final wellhead Stack up Illustration #2-2.
6. Skid Rig to adjacent well to drill Surface hole.
7. Surface casing test will be performed by the rig in order to allow ample time for Cement to develop 500psi compressive strength. Casing test to 0.22 psi/ft or 1500 psi whichever is greater - not to exceed 70% casing burst.

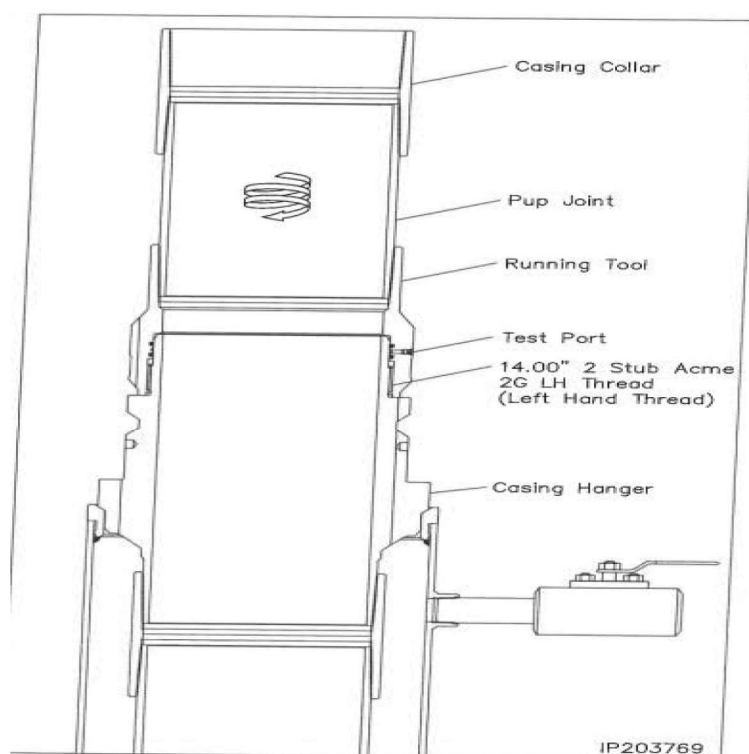


Illustration 1-1

Intermediate Casing – PR intends to Batch set all intermediate casing strings to a depth approved in the APD. Intermediate Holes will be batch drilled by the rig. Appropriate notifications will be made prior to testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Test Surface casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
3. Install wear bushing then drill out surface casing shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
4. Drill Intermediate hole to approved casing point. Trip out of hole with BHA to run Casing.
5. Remove wear bushing then run and land Intermediate Casing with mandrel hanger in wellhead.
6. Cement casing to surface with floats holding.
7. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
8. Install pack-off and test void to 5,000 psi for 15 minutes. Nightcap shown on final wellhead stack up illustration 2-2 on page 3.
9. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
10. Install nightcap – skid rig to adjacent well to drill Intermediate hole.

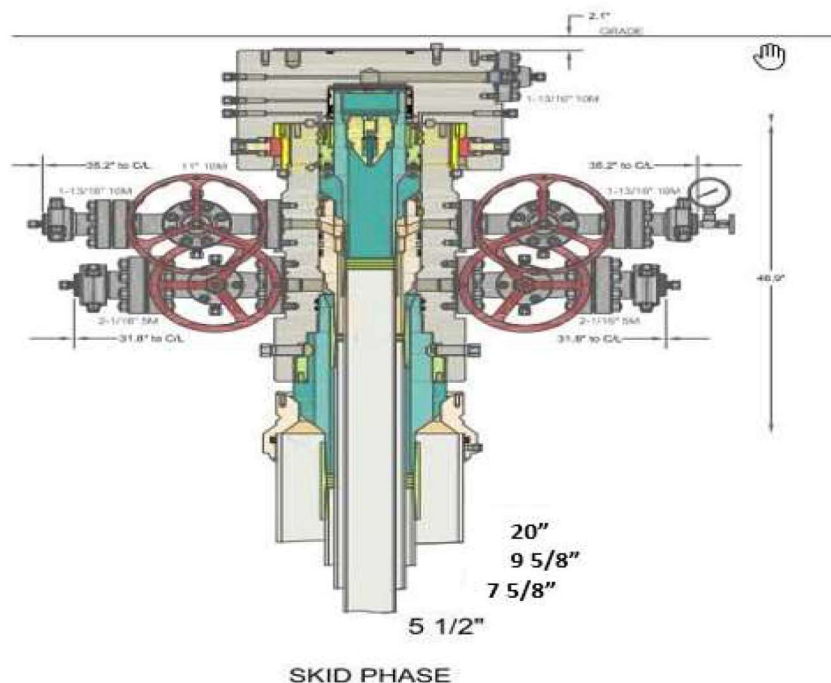


Illustration 2-2

Production Casing – PR intends to Batch set all Production casings with Rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Drilling Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run Production Casing.
6. Remove wear bushing then run Production casing to TD landing casing mandrel in wellhead.
7. Cement Production string with floats holding.
8. Run in with wash tool and wash wellhead area – install pack-off and test void to 5,000psi for 15 minutes.
9. Install BPV in Production mandrel hanger – Nipple down BOPE and install nightcap.
10. Test nightcap void to 5,000 psi for 30 minutes per illustration 2-2
11. Skid rig to adjacent well on pad to drill production hole.



ContiTech Fluid Technology

ContiTech Oil & Marine Corp. # 11535 Brittmoore Park Dr., Houston, TX 77041-6916 USA		Packing list / Delivery note		
CONSIGNEE / Ship-to address: HELMERICH & PAYNE INT'L DRILLING CO ATTN: FLEX RIG WHSE - B-BAY 210 MAGNOLIA DRIVE GALENA PARK TX 77547		Document No. 71461553 Document Date 28.01.2022 Customer Number 11697 Customer VAT No. Supplier Number Purchase Order No. 740362040 Purchase Order Date 18.01.2022 Sales Order Number 1388153 Sales Order Date 18.01.2022		
Buyer: HELMERICH & PAYNE INT'L DRILLING CO 1437 SOUTH BOULDER 74119 TULSA		Unloading Point RAN-No.		
Conditions Incoterms EXW Houston Ex Works		Page 1 of 2 Weights (Gross / Net) Total Gross Weight 2,507.000 LB Total Net Weight 2,507.000 LB		
Item	Material/Description	Quantity	Net Weight	Gross Weight
20	Buyer: Jack Peebles E-mail: Jackie.Peebles@hpinc.com Tel: 832-782-6000 Rig/Whse: HOW 00RECERTIFY Recert of HP Hoses Serial# 67094 Commodity Code: 3" X 35 FT 10K Choke & Kill Hoses API 16C End 1: 4 - 1/16" 10Kpsi API Spec 6A Type 6BX Flange End 2: 4 - 1/16" 10Kpsi API Spec 6A Type 6BX Flange c/w BX155 ring groove each end Standard: API Spec 16C - Monogrammed Working Pressure: 10,000psi Test Pressure: 15,000psi Inspection & Certification includes: External inspection of the hose & couplings Internal boroscopic inspection of hose liner Hydrostatic pressure test of hose assembly Repair of any external damage to hose body and end connections (limited to minor repairs). Clean & protect end connections Inspection Report Disposal of hose assembly if hose fails inspection and recertification process. Please Flush Hoses before sending them to our Facility.	1 PC	2,507.000 LB	2,507.000 LB

ContiTech Rubber Industrial Kft.
 H-6728 Szeged Budapesti út 10.
 P. O. Box 152 Szeged H-6701
 Phone: (62)566-700, Fax: (62)566-713
 Tax Number: 11087209-2-06
 EU Community VAT: HU11087209
 Registration No.: Cg. 0609-002502
 Registry Court: Csongrád Megyei Cégbíróság

COMMERZBANK ZRT. (HUF)
 H-1054 Budapest, Széchenyi rakpart 8.
 H-1245 Budapest P.O. Box 1070
 Account No.: 14220108-26830003
 IBAN: HU83 1422 0108 2683 0003 0000 0000
 SWIFT: COBA HU HXXX

COMMERZBANK AG Hannover (EUR)
 30159 Hannover, Theaterstr. 11-12.
 Account No.: 3 066 156 00
 Sort Code: 250 400 66
 BIC: COBADEFF250
 IBAN: DE41250400660306615600

Record Rotary Hose sleeve number on the CBC Made Hose List!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!



Hydrostatic Test Certificate

ContiTech


Certificate Number H100122	COM Order Reference 1388153	Customer Name & Address HELMERICH & PAYNE DRILLING CO 1434 SOUTH BOULDER AVE TULSA, OK 74119 USA
Customer Purchase Order No: 740362040		
Project:		
Test Center Address ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston, TX 77041 USA	Accepted by COM Inspection Signed: Gerson Mejia-Lazo Date: 02/09/22	Accepted by Client Inspection

We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

Item	Part No.	Description	Qty	Serial Number	Work. Press. (psi)	Test Press. (psi)	Test Time (minutes)
20	RECERTIFICATION	3" ID 10K Choke and Kill Hose x 35ft OAL	1	67094	10,000	15,000	60

Record Information	
Start Time	1/27/2022 13:21:21
End Time	1/27/2022 14:38:28
Interval	00:01:00
Number	78
MaxValue	15849
MinValue	-3
AvgValue	14240
RecordName	67094-sh
RecordNumber	199

Gauge Information	
Model	ADT680
SN	21817380014
Range	(0-40000)psi
Unit	psi

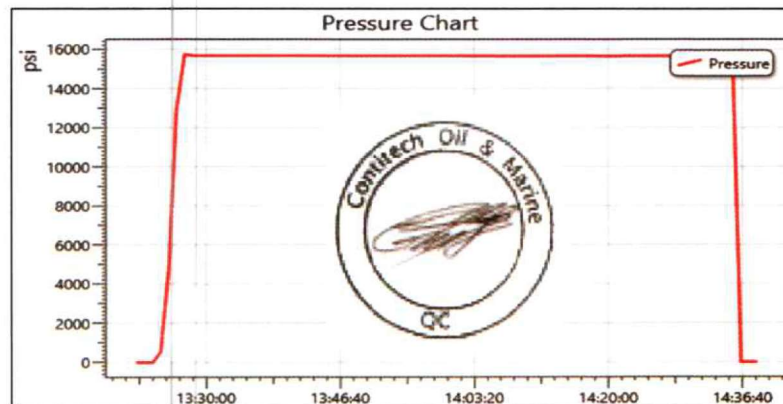

Permian Resources

BOP Break Testing Variance Procedure

Subject: Request for a Variance Allowing break Testing of the Blowout Preventer Equipment (BOPE). Permian Resources requests a variance to ONLY test broken pressure seals on the BOPE and function test BOP when skidding a drilling rig between multiple wells on a pad.

Background

Title 43 CFR 3172, Drilling Operations, Sections 6.b.9.iv states that the BOP test must be performed whenever any seal subject to test pressure is broken. The current interpretation of the Bureau of Land Management (BLM) requires a complete BOP test and not just a test of the affected component. 43 CFR 3172.13, Variances from minimum standards states, "An operator may request the authorized officer to approve a variance from any of the minimum standards prescribed in [§§ 3172.6](#) through [3172.12](#). All such requests shall be submitted in writing to the appropriate authorized officer and provide information as to the circumstances which warrant approval of the variance(s) requested and the proposed alternative methods by which the related minimum standard(s) are to be satisfied. The authorized officer, after considering all relevant factors, if appropriate, may approve the requested variance(s) if it is determined that the proposed alternative(s) meet or exceed the objectives of the applicable minimum standard(s)". Permian Resources feels the break testing the BOPE is such a situation. Therefore, as per 43 CFR 3172.13, Permian Resources submits this request for the variance.

Supporting Documentation

The language used in 43 CFR 3172 became effective on December 19, 1988 and has remained the standard for regulating BLM onshore drilling operations for over 30 years. During this time, there have been significant changes in drilling technology. The BLM continues to use the variance request process to allow for the use of modern technology and acceptable engineering practices that have arisen since 43 CFR 3172 was originally released. The Permian Resources drilling rig fleet has many modern upgrades that allow the intact BOP stack to be moved between well slots on a multi-well pad, as well as, wellhead designs that incorporate quick connects facilitating release of the BOP from the wellhead without breaking any BOP stack components apart. These technologies have been used extensively offshore, and other regulators, API, and many operators around the world have endorsed break testing as safe and reliable.

Figure 1: Winch System attached to BOP Stack


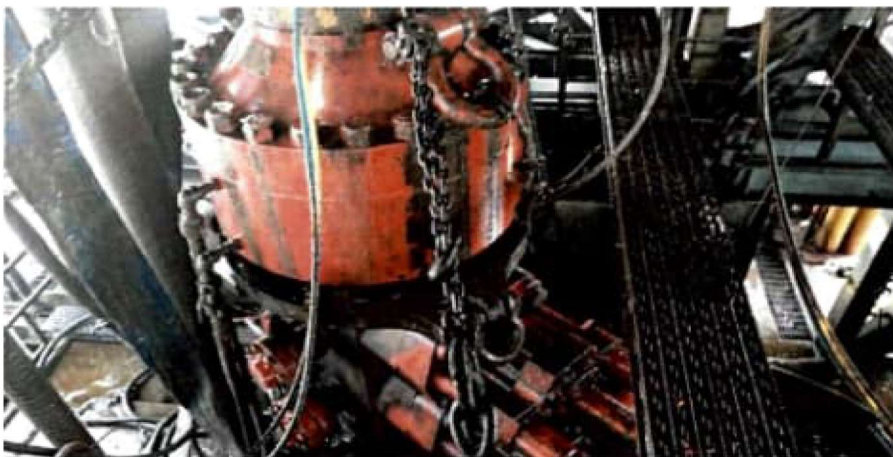


Figure 2: BOP Winch System

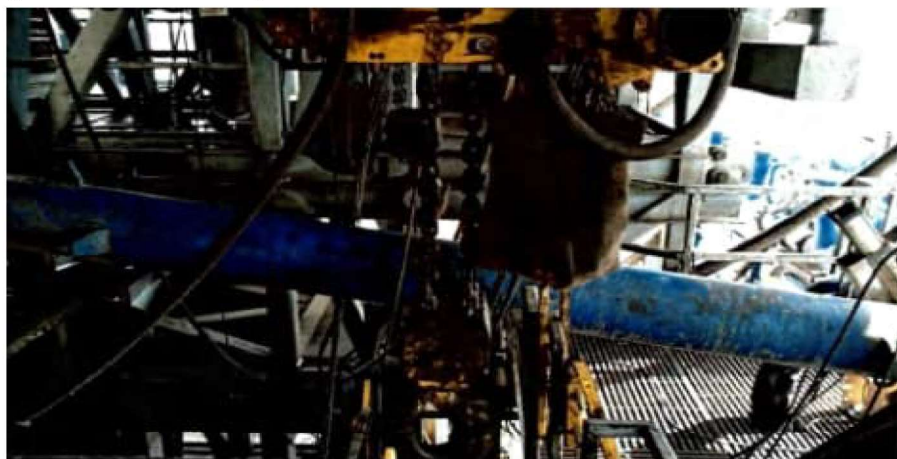

American Petroleum Institute (API) standards, specification and recommended practices are considered the industry standard and are consistently utilized and referenced by the industry. 43 CFR 3172 recognizes API recommended Practices (RP) 53 in its original development. API Standard 53, Well Control Equipment Systems for Drilling Wells (Fifth Edition, December 2018, Annex C, Table C.4) recognizes break testing as an acceptable practice. Specifically, API Standard 53, Section 5.3.7.1 states "A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component." See Table C.4 below for reference.

62

API STANDARD 53

Table C.4—Initial Pressure Testing, Surface BOP Stacks

Component to be Pressure Tested	Pressure Test—Low Pressure ^{a,c} psig (MPa)	Pressure Test—High Pressure ^{a,c}	
		Change Out of Component, Elastomer, or Ring Gasket	No Change Out of Component, Elastomer, or Ring Gasket
Annular preventer ^b	250 to 350 (1.72 to 2.41)	RWP of annular preventer	MASP or 70% annular RWP, whichever is lower.
Fixed pipe, variable bore, blind, and BSR preventers ^{b,c}	250 to 350 (1.72 to 2.41)	RWP of ram preventer or wellhead system, whichever is lower	ITP
Choke and kill line and BOP side outlet valves below ram preventers (both sides)	250 to 350 (1.72 to 2.41)	RWP of side outlet valve or wellhead system, whichever is lower	ITP
Choke manifold—upstream of chokes ^a	250 to 350 (1.72 to 2.41)	RWP of ram preventers or wellhead system, whichever is lower	ITP
Choke manifold—downstream of chokes ^a	250 to 350 (1.72 to 2.41)	RWP of valve(s), line(s), or MASP for the well program, whichever is lower	
Kelly, kelly valves, drill pipe safety valves, IBOPs	250 to 350 (1.72 to 2.41)	MASP for the well program	

^a Pressure test evaluation periods shall be a minimum of five minutes.

No visible leaks.

The pressure shall remain stable during the evaluation period. The pressure shall not decrease below the intended test pressure.

^b Annular(s) and VBR(s) shall be pressure tested on the largest and smallest OD drill pipe to be used in well program.

^c For pad drilling operations, moving from one wellhead to another within the 21 days, pressure testing is required for pressure-containing and pressure-controlling connections when the integrity of a pressure seal is broken.

^d For surface offshore operations, the ram BOPs shall be pressure tested with the ram locks engaged and the closing and locking pressure vented during the initial test. For land operations, the ram BOPs shall be pressure tested with the ram locks engaged and the closing and locking pressure vented at commissioning and annually.

^e Adjustable chokes are not required to be full sealing devices. Pressure testing against a closed choke is not required.

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specification and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations.


Break testing has been approved by the BLM in the past with other operators based on the detailed information provided in this document.

Permian Resources feels break testing and our current procedures meet the intent of 43 CFR 3172 and often exceed it. There has been no evidence that break testing results in more components failing than seen on full BOP tests. Permian Resources internal standards require complete BOPE tests more often than that of 43 CFR 3172 (every 21 days). In addition to function testing the annular, pipe rams and blind rams after each BOP nipple up, Permian Resources performs a choke drill with the rig crew prior to drilling out every casing shoe. This is additional training for the rig crew that exceeds the requirements of 43 CFR 3172.

Procedures

- 1) Permian Resources will use this document for our break testing plan for New Mexico Delaware Basin. The summary below will be referenced in the APD or Sundry Notice and receive approval prior to implementing this variance.
- 2) Permian Resources will perform BOP break testing on multi-wells pads where multiple intermediate sections can be drilled and cased within the 21-day BOP test window.
 - a) A full BOP test will be conducted on the first well on the pad.
 - b) The first intermediate hole section drilled on the pad will be the deepest. All the remaining hole sections will be the same formation depth or shallower.
 - c) A full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.
 - d) A full BOP test will be required prior to drilling any production hole.
- 3) After performing a complete BOP test on the first well, the intermediate hole section will be drilled and cased, two breaks would be made on the BOP equipment.
 - a) Between the HCV valve and choke line connection
 - b) Between the BOP quick connect and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by a hydraulic system.
- 5) After skidding to the next well, the BOP is moved to the wellhead by the same hydraulic system and installed.
- 6) The connections mentioned in 3a and 3b will then be reconnected.
- 7) Install test plug into the wellhead using test joint or drill pipe.
- 8) A shell test is performed against the upper pipe rams testing the two breaks.
- 9) The shell test will consist of a 250 psi low test and a high test to the value submitted in the APD or Sundry (e.g. 5,000 psi or 10,000psi).
- 10) Function tests will be performed on the following components: lower pipe rams, blind rams, and annular.
- 11) For a multi-well pad the same two breaks on the BOP would be made and on the next wells and steps 4 through 10 would be repeated.
- 12) A second break test would only be done if the intermediate hole section being drilled could not be completed within the 21 day BOP test window.

Note: Picture below highlights BOP components that will be tested during batch operations

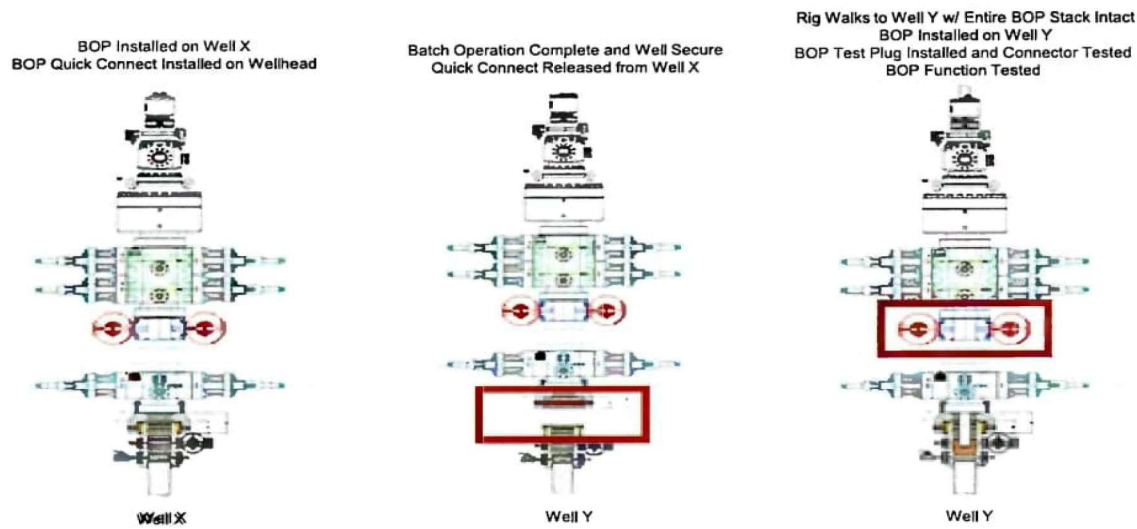


Summary

A variance is requested to ONLY test broken pressure seals on the BOP equipment when moving from wellhead to wellhead which is in compliance with API Standard 53. API Standard 53 states, that for pad drilling operations, moving from one wellhead to another within 21 days, pressure testing is required for pressure-containing and pressure-controlling connections when the integrity of a pressure seal is broken.

The BOP will be secured by a hydraulic carrier or cradle. The BLM will be contacted if a Well Control event occurs prior to the commencement of a BOPE Break Testing operation.


Based on public data and the supporting documentation submitted herein to the BLM, we will request permission to ONLY retest broken pressure seals if the following conditions are met:

- 1) After a full BOP test is conducted on the first well on the pad.
- 2) The first intermediate hole section drilled on the pad will be the deepest. All the remaining hole sections will be the same depth or shallower.
- 3) A full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.
- 4) A full BOP test will be required prior to drilling the production hole.

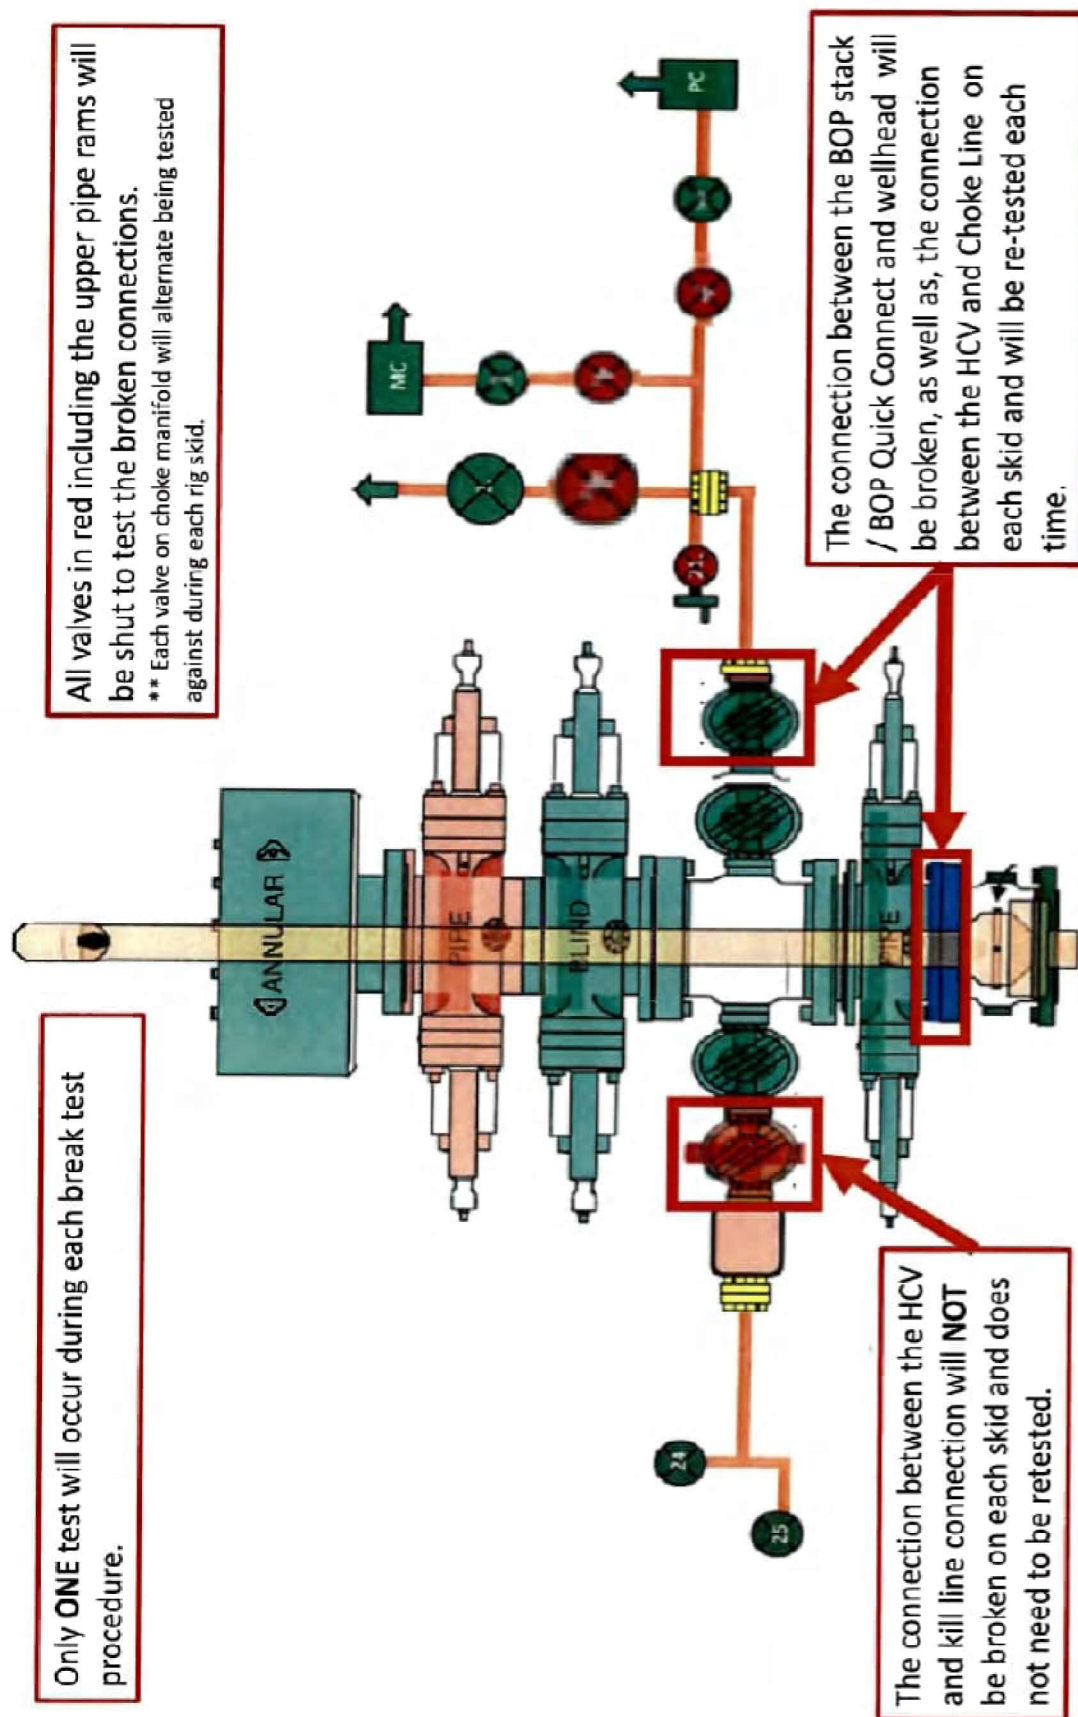


Permian Resources Offline Cementing Procedure Surface & Intermediate Casing


1. Drill hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and casing to Depth.
3. Land casing with mandrel.
4. Circulate 1.5 csg capacity.
5. Flow test – Confirm well is static and floats are holding.
6. Set Annular packoff and pressure test. Test to 5k.
7. Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Rig down cementers and equipment
16. Install night cap with pressure gauge to monitor.

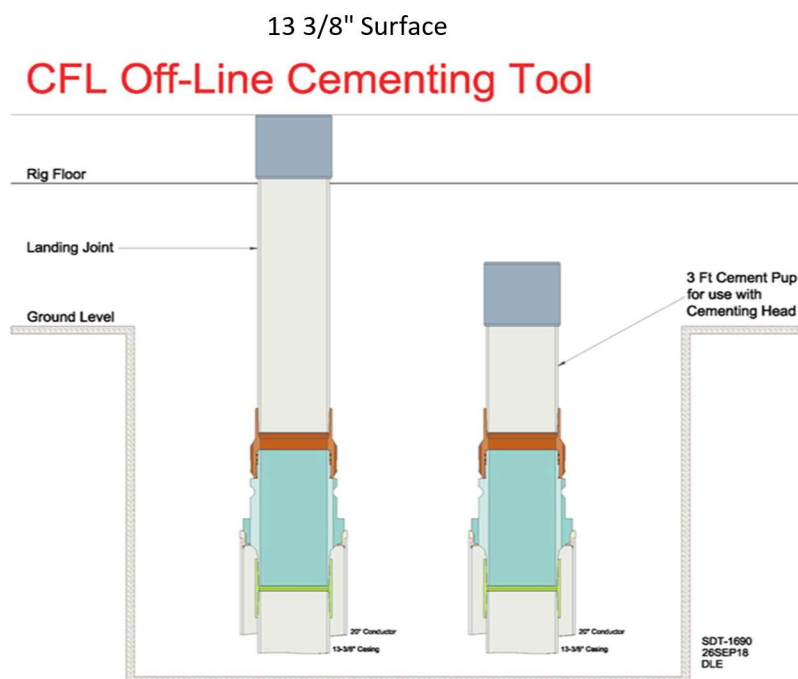


Intermediate

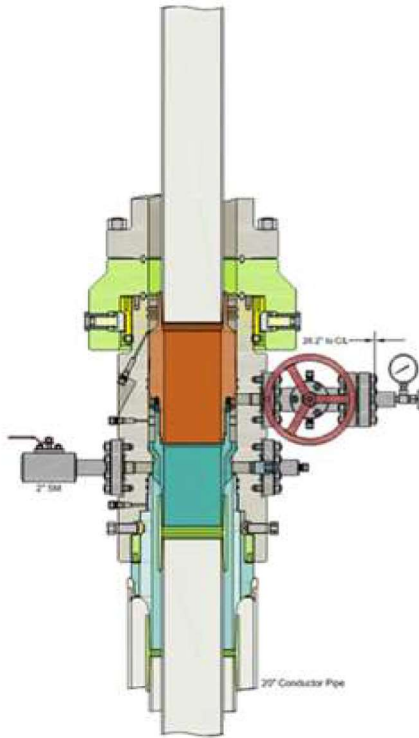

Run 7 5/8" Casing
Land Casing on 7 5/8" Mandrel Hanger
Cement 7 5/8" Casing
Retrieve Running Tool

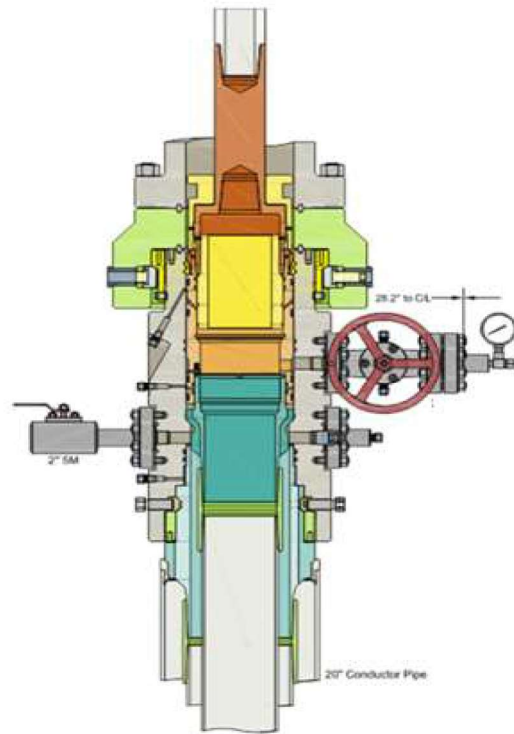

Run 9 5/8" Packoff
Test Upper and Lower Seals
Engage Lockring
Retrieve Running Tool

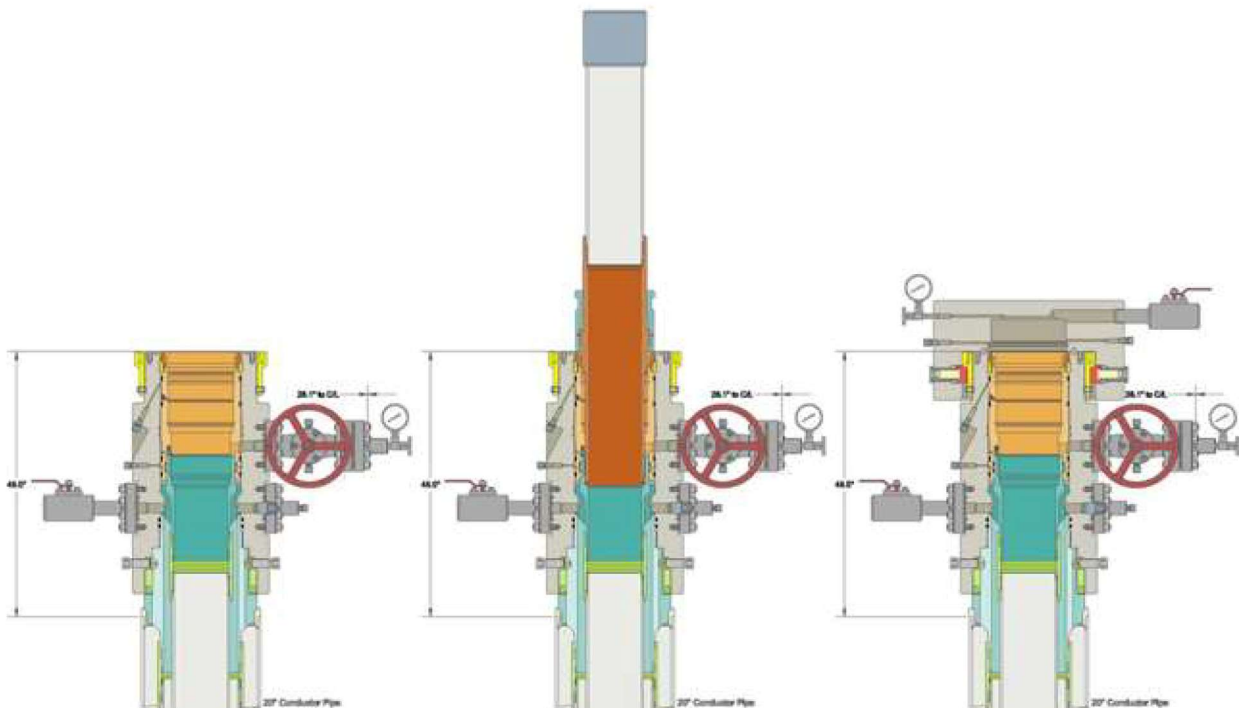



Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 487469

CONDITIONS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 487469
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	8/12/2025

Santa Fe Main Office
Phone: (505) 476-3441
General Information
Phone: (505) 629-6116

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

Online Phone Directory Visit:
<https://www.emnrd.nm.gov/ocd/contact-us/>

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-55969
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Permian Resources Operating, LLC		6. State Oil & Gas Lease No.
3. Address of Operator 300 N. Marienfeld St Ste 1000 Midland, Texas 79701		7. Lease Name or Unit Agreement Name Water Buffalo
4. Well Location Unit Letter <u>I</u> : <u>2356</u> feet from the <u>South</u> line and <u>226</u> feet from the <u>East</u> line Section <u>3</u> Township <u>22S</u> Range <u>26E</u> NMPM County <u>Eddy</u>		8. Well Number <u>131H</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3201ft GL		9. OGRID Number 372165
10. Pool name or Wildcat Esperanza; Bone Spring		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐
 CLOSED-LOOP SYSTEM ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Permian Resources Operating, LLC requests permission to make the following changes to the original APD: Name Change, SHL Change, Drilling Program, Acreage Change, Infill/Defining Well

See Page 2 For Additional Details

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Stephanie Rabadue TITLE Regulatory Manager DATE 07/21/2025

Type or print name Stephanie Rabadue E-mail address: stephanie.rabadue@permianres.com PHONE: 432-260-4388

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____
 Conditions of Approval (if any): _____

Current Well Name/Number: Water Buffalo 131H
Change Well Name/Number to: Water Buffalo State Com 131H

SHL: Revised
Change From: 2356'FSL & 226'FEL, I-3-22S-26E
Change To: 2356'FSL & 315'FEL, I-3-22S-26E

Acreage: Revised
From: 322.24
To: 642.24

Infill/Defining Well: Revised
Change From: Infill
Change To: Defining

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
		☐ As Drilled	

WELL LOCATION INFORMATION

API Number 30-015-55969	Pool Code 97755	Pool Name Esperanza; Bone Spring
Property Code 335407	Property Name WATER BUFFALO STATE COM	Well Number 131H
OGRID No. 372165	Operator Name PERMIAN RESOURCES OPERATING, LLC	Ground Level Elevation 3,203'
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☒ State ☒ Fee ☐ Tribal ☐ Federal

Surface Location

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 2,353' FSL	Ft. from E/W 315' FEL	Latitude 32.421077°	Longitude -104.273098°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Bottom Hole Location

UL	Section 1	Township 22S	Range 26E	Lot LOT 1	Ft. from N/S 1,000' FNL	Ft. from E/W 100' FEL	Latitude 32.425897°	Longitude -104.237893°	County EDDY
----	---------------------	------------------------	---------------------	---------------------	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Dedicated Acres 642.24	Infill or Defining Well Defining	Defining Well API 30-015-55969	Overlapping Spacing Unit (Y/N) N	Consolidation Code C
Order Numbers.			Well setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 2,353' FSL	Ft. from E/W 315' FEL	Latitude 32.421077°	Longitude -104.273098°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------


First Take Point (FTP)

UL	Section 2	Township 22S	Range 26E	Lot LOT 4	Ft. from N/S 1,000' FNL	Ft. from E/W 100' FWL	Latitude 32.425919°	Longitude -104.271651°	County EDDY
----	---------------------	------------------------	---------------------	---------------------	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Last Take Point (LTP)

UL	Section 1	Township 22S	Range 26E	Lot LOT 1	Ft. from N/S 1,000' FNL	Ft. from E/W 100' FEL	Latitude 32.425897°	Longitude -104.237893°	County EDDY
----	---------------------	------------------------	---------------------	---------------------	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Unitized Area or Area of Uniform Interest N/A	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation: TBD
---	--	---------------------------------------


OPERATOR CERTIFICATIONS I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division. <i>Stephanie Rabadue</i> 6/24/2025		SURVEYOR CERTIFICATIONS I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  Date: 6/20/2025	
Signature _____ Date _____ Stephanie Rabadue		Signature and Seal of Professional Surveyor _____	
Printed Name stephanie.rabadue@permianres.com		Certificate Number 12177	Date of Survey 6/20/2025
Email Address			

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

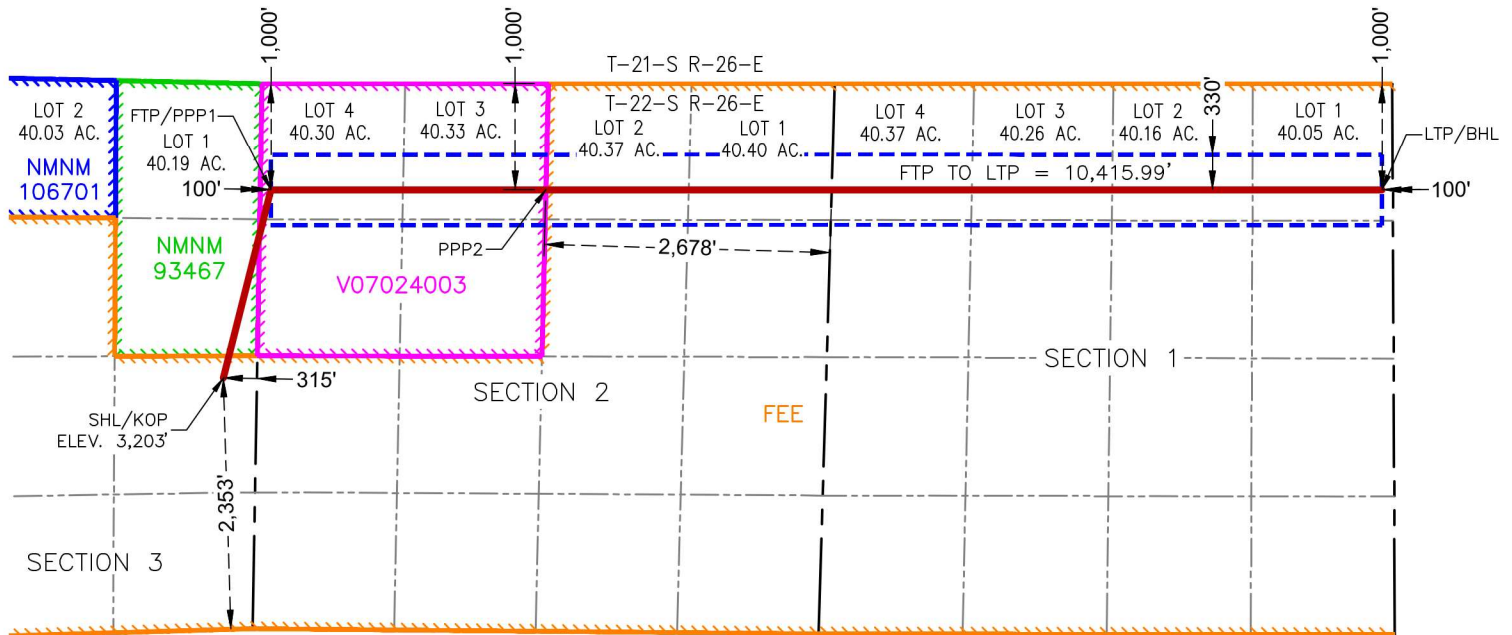

WATER BUFFALO STATE COM 131H

SURFACE HOLE LOCATION
& KICK-OFF POINT
2,353' FSL & 315' FEL
ELEV. = 3,203'

NAD 83 X = 559,923.82'
NAD 83 Y = 516,924.29'
NAD 83 LAT = 32.421077°
NAD 83 LONG = -104.273098°
NAD 27 X = 518,742.86'
NAD 27 Y = 516,864.64'
NAD 27 LAT = 32.420960°
NAD 27 LONG = -104.272592°

FIRST TAKE POINT &
PENETRATION POINT 1
1,000' FNL & 100' FWL

NAD 83 X = 560,369.34'
NAD 83 Y = 518,685.92'
NAD 83 LAT = 32.425919°
NAD 83 LONG = -104.271651°
NAD 27 X = 519,188.40'
NAD 27 Y = 518,626.22'
NAD 27 LAT = 32.425802°
NAD 27 LONG = -104.271145°

PENETRATION POINT 2
1,000' FNL & 2,678' FEL

NAD 83 X = 562,947.65'
NAD 83 Y = 518,686.50'
NAD 83 LAT = 32.425916°
NAD 83 LONG = -104.263295°
NAD 27 X = 521,766.66'
NAD 27 Y = 518,626.75'
NAD 27 LAT = 32.425799°
NAD 27 LONG = -104.262789°

LAST TAKE POINT &
BOTTOM HOLE LOCATION
1,000' FNL & 100' FEL

NAD 83 X = 570,785.32'
NAD 83 Y = 518,685.73'
NAD 83 LAT = 32.425897°
NAD 83 LONG = -104.237893°
NAD 27 X = 529,604.20'
NAD 27 Y = 518,625.86'
NAD 27 LAT = 32.425779°
NAD 27 LONG = -104.237388°

Permian Resources - Water Buffalo 131H

1. Geologic Formations

Formation	Elevation	TVD	Target
Rustler	3224	5	No
Top of Salt	2817	412	No
Capitan	2469	760	No
Lamar	1511	1718	No
Bell Canyon	1412	1817	No
Cherry Canyon	825	2404	No
Brushy Canyon	-159	3388	No
Bone Spring	-1710	4934	No
1st Bone Spring	-2861	6090	No
2nd Bone Spring	-3041	6270	No
3rd Bone Spring	-4899	8128	No

2. Blowout Prevention

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12.25	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		
8.75	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		

Equipment: BOPE will meet all requirements for above listed system per 43 CFR 3172. BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The system may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional, tested, and will meet all requirements per 43 CFR 3172. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing of the surface x intermediate annulus without breaking the connection between the BOP & wellhead. A variance is requested to utilize a flexible choke line (flexhose) from the BOP to choke manifold.

Requesting Variance? YES

Variance request: Multibowl Wellhead, Flexhose, Breaktesting, Offline Cementing Variances. Attachments in Section 8.

Testing Procedure: Operator requests to ONLY test broken pressure seals per API Standard 53 and the attachments in Section 8. The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed, b. whenever any seal subject to test pressure is broken, c. following related repairs, d. at 21-day intervals. Testing of the ram type preventer(s) and annual type preventer(s) shall be tested per 43 CFR 3172. The BOPE configuration, choke manifold layout, and accumulator system will be in compliance with 43 CFR 3172. Bleed lines will discharge 100' from wellhead in non-H2S scenarios and 150' from wellhead in H2S scenarios.

Choke Diagram Attachemnt: 5M Choke Manifold

BOP Diagram Attachment: BOP Schematic

3. Casing

String	Hole Size	Casing Size	Top	Bottom	Length	Grade	Weight	Connection	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
Surface	17.5	13.375	0	387	387	J55	54.5	BTC	5.91	55.81	Dry	7.51	Dry	7.04
Intermediate	12.25	9.625	0	1818	1818	J55	36	BTC	2.92	1.63	Dry	4.32	Dry	3.81
Production	8.75	5.5	0	8275	8275	P110RY	20	Bushmaster SP	2.39	2.50	Dry	2.38	Dry	2.38
Production	8.5	5.5	8275	18953	10678	P110RY	20	Bushmaster SP	2.39	2.50	Dry	2.38	Dry	2.38
BLM Min Safety Factor									1.125	1		1.6		1.6

Non API casing spec sheets and casing design assumptions attached.

4. Cement

String	Lead/Tail	Top MD	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Surface	Lead	0	300	230	1.88	12.9	420	100%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Surface	Tail	300	387	80	1.34	14.8	100	50%	Class C	Accelerator
Intermediate	Lead	785	1450	180	1.88	12.9	320	50%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Intermediate	Tail	1450	1818	140	1.34	14.8	180	50%	Class C	Retarder
Stage Tool Depth		785								
Intermediate 2nd Stage	Lead	0	285	60	1.88	12.9	100	50%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Intermediate 2nd Stage	Tail	285	785	160	1.33	14.8	200	25%	Class C	Salt
Production	Lead	0	7400	1020	2.41	11.5	2450	40%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
Production	Tail	7400	18953	1940	1.73	12.5	3340	25%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder

5. Circulating Medium

Mud System Type: Closed

Will an air or gas system be used: No

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Cuttings Volume: 8730 Cu Ft

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight	Max Weight
0	387	Spud Mud	8.6	9.5
387	1818	Fresh Water	8.6	9.5
1818	8275	OBM	9	10.5
8275	18953	OBM	9	10.5

6. Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY

Coring operation description for the well:

N/A

7. Pressure

Anticipated Bottom Hole Pressure	4640	psi
Anticipated Surface Pressure	2768	psi
Anticipated Bottom Hole Temperature	142	°F
Anticipated Abnormal pressure, temp, or geo hazards	No	

PERMIAN

R E S O U R C E S

NEW MEXICO

(SP) EDDY

WATER BUFFALO

WATER BUFFALO STATE COM 131H

OWB

Plan: PWP0

Standard Planning Report - Geographic

24 June, 2025

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO STATE COM 131H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO STATE COM 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Project	(SP) EDDY		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		WATER BUFFALO			
Site Position:		Northing:	516,263.18 usft	Latitude:	32° 25' 9.336 N
From:	Map	Easting:	559,833.96 usft	Longitude:	104° 16' 24.206 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well		WATER BUFFALO STATE COM 131H				
Well Position	+N/-S	0.0 usft	Northing:	516,924.29 usft	Latitude:	32° 25' 15.878 N
	+E/-W	0.0 usft	Easting:	559,923.82 usft	Longitude:	104° 16' 23.154 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,203.0 usft
Grid Convergence:		0.03 °				

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	8.08	60.30	48,834.31764662

Design	PWP0			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	80.79

Plan Survey Tool Program	Date	6/24/2025		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	18,953.6 PWP0 (OWB)	MWD	
			OWSG_Rev2_ MWD - Standal	

PERMIAN
RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO STATE COM 131H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO STATE COM 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,827.2	16.54	14.19	1,815.8	115.0	29.1	2.00	2.00	0.00	14.19	
7,375.4	16.54	14.19	7,134.2	1,646.6	416.4	0.00	0.00	0.00	0.00	
8,202.6	0.00	0.00	7,950.0	1,761.6	445.5	2.00	-2.00	0.00	180.00	
8,265.1	0.00	0.00	8,012.5	1,761.6	445.5	0.00	0.00	0.00	0.00	
9,015.1	90.00	89.99	8,490.0	1,761.7	923.0	12.00	12.00	12.00	89.99	
11,115.9	90.00	89.99	8,490.0	1,762.2	3,023.8	0.00	0.00	0.00	0.00	PP2 WB 131H
11,116.9	90.00	90.01	8,490.0	1,762.2	3,024.8	2.00	0.10	2.00	87.03	
18,953.6	90.00	90.01	8,490.0	1,761.4	10,861.5	0.00	0.00	0.00	0.00	LTP/BHL WB 131H

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO STATE COM 131H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO STATE COM 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
100.0	0.00	0.00	100.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
200.0	0.00	0.00	200.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
300.0	0.00	0.00	300.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
400.0	0.00	0.00	400.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
500.0	0.00	0.00	500.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
600.0	0.00	0.00	600.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
700.0	0.00	0.00	700.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
800.0	0.00	0.00	800.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
900.0	0.00	0.00	900.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	516,924.29	559,923.82	32° 25' 15.878 N	104° 16' 23.154 W
Start Build 2.00									
1,100.0	2.00	14.19	1,100.0	1.7	0.4	516,925.98	559,924.25	32° 25' 15.894 N	104° 16' 23.149 W
1,200.0	4.00	14.19	1,199.8	6.8	1.7	516,931.06	559,925.53	32° 25' 15.945 N	104° 16' 23.134 W
1,300.0	6.00	14.19	1,299.5	15.2	3.8	516,939.51	559,927.67	32° 25' 16.028 N	104° 16' 23.109 W
1,400.0	8.00	14.19	1,398.7	27.0	6.8	516,951.32	559,930.66	32° 25' 16.145 N	104° 16' 23.074 W
1,500.0	10.00	14.19	1,497.5	42.2	10.7	516,966.49	559,934.49	32° 25' 16.295 N	104° 16' 23.029 W
1,600.0	12.00	14.19	1,595.6	60.7	15.3	516,984.98	559,939.17	32° 25' 16.478 N	104° 16' 22.974 W
1,700.0	14.00	14.19	1,693.1	82.5	20.9	517,006.79	559,944.69	32° 25' 16.694 N	104° 16' 22.910 W
1,800.0	16.00	14.19	1,789.6	107.6	27.2	517,031.88	559,951.03	32° 25' 16.942 N	104° 16' 22.836 W
1,827.2	16.54	14.19	1,815.8	115.0	29.1	517,039.28	559,952.90	32° 25' 17.015 N	104° 16' 22.814 W
Start 5548.2 hold at 1827.2 MD									
1,900.0	16.54	14.19	1,885.5	135.1	34.2	517,059.37	559,957.98	32° 25' 17.214 N	104° 16' 22.754 W
2,000.0	16.54	14.19	1,981.4	162.7	41.1	517,086.97	559,964.97	32° 25' 17.487 N	104° 16' 22.673 W
2,100.0	16.54	14.19	2,077.3	190.3	48.1	517,114.58	559,971.95	32° 25' 17.761 N	104° 16' 22.591 W
2,200.0	16.54	14.19	2,173.1	217.9	55.1	517,142.19	559,978.93	32° 25' 18.034 N	104° 16' 22.509 W
2,300.0	16.54	14.19	2,269.0	245.5	62.1	517,169.79	559,985.91	32° 25' 18.307 N	104° 16' 22.428 W
2,400.0	16.54	14.19	2,364.8	273.1	69.1	517,197.40	559,992.89	32° 25' 18.580 N	104° 16' 22.346 W
2,500.0	16.54	14.19	2,460.7	300.7	76.1	517,225.01	559,999.87	32° 25' 18.853 N	104° 16' 22.264 W
2,600.0	16.54	14.19	2,556.6	328.3	83.0	517,252.61	560,006.86	32° 25' 19.126 N	104° 16' 22.183 W
2,700.0	16.54	14.19	2,652.4	355.9	90.0	517,280.22	560,013.84	32° 25' 19.399 N	104° 16' 22.101 W
2,800.0	16.54	14.19	2,748.3	383.5	97.0	517,307.83	560,020.82	32° 25' 19.673 N	104° 16' 22.020 W
2,900.0	16.54	14.19	2,844.1	411.1	104.0	517,335.43	560,027.80	32° 25' 19.946 N	104° 16' 21.938 W
3,000.0	16.54	14.19	2,940.0	438.7	111.0	517,363.04	560,034.78	32° 25' 20.219 N	104° 16' 21.856 W
3,100.0	16.54	14.19	3,035.9	466.4	117.9	517,390.65	560,041.77	32° 25' 20.492 N	104° 16' 21.775 W
3,200.0	16.54	14.19	3,131.7	494.0	124.9	517,418.25	560,048.75	32° 25' 20.765 N	104° 16' 21.693 W
3,300.0	16.54	14.19	3,227.6	521.6	131.9	517,445.86	560,055.73	32° 25' 21.038 N	104° 16' 21.611 W
3,400.0	16.54	14.19	3,323.4	549.2	138.9	517,473.47	560,062.71	32° 25' 21.311 N	104° 16' 21.530 W
3,500.0	16.54	14.19	3,419.3	576.8	145.9	517,501.07	560,069.69	32° 25' 21.585 N	104° 16' 21.448 W
3,600.0	16.54	14.19	3,515.2	604.4	152.9	517,528.68	560,076.67	32° 25' 21.858 N	104° 16' 21.366 W
3,700.0	16.54	14.19	3,611.0	632.0	159.8	517,556.29	560,083.66	32° 25' 22.131 N	104° 16' 21.285 W
3,800.0	16.54	14.19	3,706.9	659.6	166.8	517,583.90	560,090.64	32° 25' 22.404 N	104° 16' 21.203 W
3,900.0	16.54	14.19	3,802.7	687.2	173.8	517,611.50	560,097.62	32° 25' 22.677 N	104° 16' 21.121 W
4,000.0	16.54	14.19	3,898.6	714.8	180.8	517,639.11	560,104.60	32° 25' 22.950 N	104° 16' 21.040 W
4,100.0	16.54	14.19	3,994.5	742.4	187.8	517,666.72	560,111.58	32° 25' 23.223 N	104° 16' 20.958 W
4,200.0	16.54	14.19	4,090.3	770.0	194.7	517,694.32	560,118.56	32° 25' 23.497 N	104° 16' 20.877 W
4,300.0	16.54	14.19	4,186.2	797.6	201.7	517,721.93	560,125.55	32° 25' 23.770 N	104° 16' 20.795 W
4,400.0	16.54	14.19	4,282.0	825.2	208.7	517,749.54	560,132.53	32° 25' 24.043 N	104° 16' 20.713 W
4,500.0	16.54	14.19	4,377.9	852.9	215.7	517,777.14	560,139.51	32° 25' 24.316 N	104° 16' 20.632 W
4,600.0	16.54	14.19	4,473.8	880.5	222.7	517,804.75	560,146.49	32° 25' 24.589 N	104° 16' 20.550 W
4,700.0	16.54	14.19	4,569.6	908.1	229.7	517,832.36	560,153.47	32° 25' 24.862 N	104° 16' 20.468 W
4,800.0	16.54	14.19	4,665.5	935.7	236.6	517,859.96	560,160.46	32° 25' 25.136 N	104° 16' 20.387 W
4,900.0	16.54	14.19	4,761.3	963.3	243.6	517,887.57	560,167.44	32° 25' 25.409 N	104° 16' 20.305 W
5,000.0	16.54	14.19	4,857.2	990.9	250.6	517,915.18	560,174.42	32° 25' 25.682 N	104° 16' 20.223 W

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO STATE COM 131H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO STATE COM 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
5,100.0	16.54	14.19	4,953.1	1,018.5	257.6	517,942.78	560,181.40	32° 25' 25.955 N	104° 16' 20.142 W	
5,200.0	16.54	14.19	5,048.9	1,046.1	264.6	517,970.39	560,188.38	32° 25' 26.228 N	104° 16' 20.060 W	
5,300.0	16.54	14.19	5,144.8	1,073.7	271.5	517,998.00	560,195.36	32° 25' 26.501 N	104° 16' 19.978 W	
5,400.0	16.54	14.19	5,240.6	1,101.3	278.5	518,025.60	560,202.35	32° 25' 26.774 N	104° 16' 19.897 W	
5,500.0	16.54	14.19	5,336.5	1,128.9	285.5	518,053.21	560,209.33	32° 25' 27.048 N	104° 16' 19.815 W	
5,600.0	16.54	14.19	5,432.4	1,156.5	292.5	518,080.82	560,216.31	32° 25' 27.321 N	104° 16' 19.734 W	
5,700.0	16.54	14.19	5,528.2	1,184.1	299.5	518,108.42	560,223.29	32° 25' 27.594 N	104° 16' 19.652 W	
5,800.0	16.54	14.19	5,624.1	1,211.7	306.5	518,136.03	560,230.27	32° 25' 27.867 N	104° 16' 19.570 W	
5,900.0	16.54	14.19	5,719.9	1,239.3	313.4	518,163.64	560,237.26	32° 25' 28.140 N	104° 16' 19.489 W	
6,000.0	16.54	14.19	5,815.8	1,267.0	320.4	518,191.24	560,244.24	32° 25' 28.413 N	104° 16' 19.407 W	
6,100.0	16.54	14.19	5,911.7	1,294.6	327.4	518,218.85	560,251.22	32° 25' 28.686 N	104° 16' 19.325 W	
6,200.0	16.54	14.19	6,007.5	1,322.2	334.4	518,246.46	560,258.20	32° 25' 28.960 N	104° 16' 19.244 W	
6,300.0	16.54	14.19	6,103.4	1,349.8	341.4	518,274.06	560,265.18	32° 25' 29.233 N	104° 16' 19.162 W	
6,400.0	16.54	14.19	6,199.2	1,377.4	348.3	518,301.67	560,272.16	32° 25' 29.506 N	104° 16' 19.080 W	
6,500.0	16.54	14.19	6,295.1	1,405.0	355.3	518,329.28	560,279.15	32° 25' 29.779 N	104° 16' 18.999 W	
6,600.0	16.54	14.19	6,391.0	1,432.6	362.3	518,356.88	560,286.13	32° 25' 30.052 N	104° 16' 18.917 W	
6,700.0	16.54	14.19	6,486.8	1,460.2	369.3	518,384.49	560,293.11	32° 25' 30.325 N	104° 16' 18.835 W	
6,800.0	16.54	14.19	6,582.7	1,487.8	376.3	518,412.10	560,300.09	32° 25' 30.599 N	104° 16' 18.754 W	
6,900.0	16.54	14.19	6,678.5	1,515.4	383.3	518,439.70	560,307.07	32° 25' 30.872 N	104° 16' 18.672 W	
7,000.0	16.54	14.19	6,774.4	1,543.0	390.2	518,467.31	560,314.06	32° 25' 31.145 N	104° 16' 18.591 W	
7,100.0	16.54	14.19	6,870.3	1,570.6	397.2	518,494.92	560,321.04	32° 25' 31.418 N	104° 16' 18.509 W	
7,200.0	16.54	14.19	6,966.1	1,598.2	404.2	518,522.52	560,328.02	32° 25' 31.691 N	104° 16' 18.427 W	
7,300.0	16.54	14.19	7,062.0	1,625.8	411.2	518,550.13	560,335.00	32° 25' 31.964 N	104° 16' 18.346 W	
7,375.4	16.54	14.19	7,134.2	1,646.6	416.4	518,570.94	560,340.26	32° 25' 32.170 N	104° 16' 18.284 W	
Start Drop -2.00										
7,400.0	16.05	14.19	7,157.9	1,653.3	418.1	518,577.64	560,341.96	32° 25' 32.236 N	104° 16' 18.264 W	
7,500.0	14.05	14.19	7,254.4	1,678.5	424.5	518,602.81	560,348.32	32° 25' 32.486 N	104° 16' 18.190 W	
7,600.0	12.05	14.19	7,351.8	1,700.4	430.0	518,624.71	560,353.86	32° 25' 32.702 N	104° 16' 18.125 W	
7,700.0	10.05	14.19	7,450.0	1,719.0	434.7	518,643.29	560,358.56	32° 25' 32.886 N	104° 16' 18.070 W	
7,800.0	8.05	14.19	7,548.7	1,734.3	438.6	518,658.54	560,362.42	32° 25' 33.037 N	104° 16' 18.025 W	
7,900.0	6.05	14.19	7,648.0	1,746.2	441.6	518,670.44	560,365.43	32° 25' 33.155 N	104° 16' 17.990 W	
8,000.0	4.05	14.19	7,747.6	1,754.7	443.8	518,678.98	560,367.59	32° 25' 33.239 N	104° 16' 17.964 W	
8,100.0	2.05	14.19	7,847.4	1,759.8	445.1	518,684.14	560,368.89	32° 25' 33.290 N	104° 16' 17.949 W	
8,202.6	0.00	0.00	7,950.0	1,761.6	445.5	518,685.92	560,369.34	32° 25' 33.308 N	104° 16' 17.944 W	
Start 62.5 hold at 8202.6 MD										
8,265.1	0.00	0.00	8,012.5	1,761.6	445.5	518,685.92	560,369.34	32° 25' 33.308 N	104° 16' 17.944 W	
Start DLS 12.00 TFO 89.99										
8,275.0	1.19	89.99	8,022.4	1,761.6	445.6	518,685.92	560,369.45	32° 25' 33.308 N	104° 16' 17.943 W	
8,300.0	4.19	89.99	8,047.4	1,761.6	446.8	518,685.92	560,370.62	32° 25' 33.308 N	104° 16' 17.929 W	
8,325.0	7.19	89.99	8,072.2	1,761.6	449.3	518,685.92	560,373.10	32° 25' 33.308 N	104° 16' 17.900 W	
8,350.0	10.19	89.99	8,097.0	1,761.6	453.0	518,685.92	560,376.87	32° 25' 33.308 N	104° 16' 17.856 W	
8,375.0	13.19	89.99	8,121.4	1,761.6	458.1	518,685.92	560,381.94	32° 25' 33.308 N	104° 16' 17.797 W	
8,400.0	16.19	89.99	8,145.6	1,761.6	464.5	518,685.93	560,388.27	32° 25' 33.308 N	104° 16' 17.723 W	
8,425.0	19.19	89.99	8,169.4	1,761.6	472.0	518,685.93	560,395.87	32° 25' 33.308 N	104° 16' 17.634 W	
8,450.0	22.19	89.99	8,192.8	1,761.6	480.9	518,685.93	560,404.70	32° 25' 33.308 N	104° 16' 17.531 W	
8,475.0	25.19	89.99	8,215.7	1,761.6	490.9	518,685.93	560,414.74	32° 25' 33.308 N	104° 16' 17.414 W	
8,500.0	28.19	89.99	8,238.0	1,761.6	502.1	518,685.93	560,425.97	32° 25' 33.308 N	104° 16' 17.283 W	
8,525.0	31.19	89.99	8,259.8	1,761.6	514.5	518,685.94	560,438.35	32° 25' 33.308 N	104° 16' 17.139 W	
8,550.0	34.19	89.99	8,280.8	1,761.6	528.0	518,685.94	560,451.85	32° 25' 33.308 N	104° 16' 16.981 W	
8,575.0	37.19	89.99	8,301.1	1,761.7	542.6	518,685.94	560,466.44	32° 25' 33.308 N	104° 16' 16.811 W	
8,600.0	40.19	89.99	8,320.6	1,761.7	558.2	518,685.95	560,482.06	32° 25' 33.307 N	104° 16' 16.629 W	
8,625.0	43.19	89.99	8,339.3	1,761.7	574.9	518,685.95	560,498.69	32° 25' 33.307 N	104° 16' 16.435 W	
8,641.2	45.13	89.99	8,350.9	1,761.7	586.1	518,685.95	560,509.97	32° 25' 33.307 N	104° 16' 16.303 W	
FTP WB 131H										

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO STATE COM 131H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO STATE COM 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured			Vertical			Map	Map			
Depth (usft)	Inclination (°)	Azimuth (°)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
8,650.0	46.19	89.99	8,357.1	1,761.7	592.4	518,685.95	560,516.27	32° 25' 33.307 N	104° 16' 16.230 W	
8,675.0	49.19	89.99	8,373.9	1,761.7	610.9	518,685.96	560,534.75	32° 25' 33.307 N	104° 16' 16.014 W	
8,700.0	52.19	89.99	8,389.7	1,761.7	630.3	518,685.96	560,554.09	32° 25' 33.307 N	104° 16' 15.788 W	
8,725.0	55.19	89.99	8,404.5	1,761.7	650.4	518,685.97	560,574.24	32° 25' 33.307 N	104° 16' 15.553 W	
8,750.0	58.19	89.99	8,418.2	1,761.7	671.3	518,685.97	560,595.13	32° 25' 33.307 N	104° 16' 15.310 W	
8,775.0	61.19	89.99	8,430.9	1,761.7	692.9	518,685.98	560,616.71	32° 25' 33.307 N	104° 16' 15.058 W	
8,800.0	64.19	89.99	8,442.3	1,761.7	715.1	518,685.98	560,638.92	32° 25' 33.307 N	104° 16' 14.799 W	
8,825.0	67.19	89.99	8,452.6	1,761.7	737.9	518,685.99	560,661.70	32° 25' 33.307 N	104° 16' 14.533 W	
8,850.0	70.19	89.99	8,461.7	1,761.7	761.2	518,685.99	560,684.98	32° 25' 33.307 N	104° 16' 14.261 W	
8,875.0	73.19	89.99	8,469.6	1,761.7	784.9	518,686.00	560,708.72	32° 25' 33.307 N	104° 16' 13.984 W	
8,900.0	76.19	89.99	8,476.2	1,761.7	809.0	518,686.00	560,732.83	32° 25' 33.307 N	104° 16' 13.703 W	
8,925.0	79.19	89.99	8,481.5	1,761.7	833.4	518,686.01	560,757.25	32° 25' 33.306 N	104° 16' 13.418 W	
8,950.0	82.19	89.99	8,485.5	1,761.7	858.1	518,686.01	560,781.92	32° 25' 33.306 N	104° 16' 13.130 W	
8,975.0	85.19	89.99	8,488.3	1,761.7	882.9	518,686.02	560,806.76	32° 25' 33.306 N	104° 16' 12.840 W	
9,000.0	88.19	89.99	8,489.7	1,761.7	907.9	518,686.03	560,831.72	32° 25' 33.306 N	104° 16' 12.549 W	
9,015.1	90.00	89.99	8,490.0	1,761.7	923.0	518,686.03	560,846.80	32° 25' 33.306 N	104° 16' 12.373 W	
Start 2100.9 hold at 9015.1 MD										
9,100.0	90.00	89.99	8,490.0	1,761.8	1,007.9	518,686.05	560,931.71	32° 25' 33.306 N	104° 16' 11.382 W	
9,200.0	90.00	89.99	8,490.0	1,761.8	1,107.9	518,686.07	561,031.71	32° 25' 33.305 N	104° 16' 10.216 W	
9,300.0	90.00	89.99	8,490.0	1,761.8	1,207.9	518,686.09	561,131.71	32° 25' 33.305 N	104° 16' 9.049 W	
9,400.0	90.00	89.99	8,490.0	1,761.8	1,307.9	518,686.12	561,231.71	32° 25' 33.305 N	104° 16' 7.882 W	
9,500.0	90.00	89.99	8,490.0	1,761.8	1,407.9	518,686.14	561,331.71	32° 25' 33.304 N	104° 16' 6.715 W	
9,600.0	90.00	89.99	8,490.0	1,761.9	1,507.9	518,686.16	561,431.71	32° 25' 33.304 N	104° 16' 5.549 W	
9,700.0	90.00	89.99	8,490.0	1,761.9	1,607.9	518,686.18	561,531.71	32° 25' 33.304 N	104° 16' 4.382 W	
9,800.0	90.00	89.99	8,490.0	1,761.9	1,707.9	518,686.21	561,631.71	32° 25' 33.303 N	104° 16' 3.215 W	
9,900.0	90.00	89.99	8,490.0	1,761.9	1,807.9	518,686.23	561,731.71	32° 25' 33.303 N	104° 16' 2.048 W	
10,000.0	90.00	89.99	8,490.0	1,762.0	1,907.9	518,686.25	561,831.71	32° 25' 33.302 N	104° 16' 0.882 W	
10,100.0	90.00	89.99	8,490.0	1,762.0	2,007.9	518,686.27	561,931.71	32° 25' 33.302 N	104° 15' 59.715 W	
10,200.0	90.00	89.99	8,490.0	1,762.0	2,107.9	518,686.30	562,031.71	32° 25' 33.302 N	104° 15' 58.548 W	
10,300.0	90.00	89.99	8,490.0	1,762.0	2,207.9	518,686.32	562,131.71	32° 25' 33.301 N	104° 15' 57.381 W	
10,400.0	90.00	89.99	8,490.0	1,762.0	2,307.9	518,686.34	562,231.71	32° 25' 33.301 N	104° 15' 56.215 W	
10,500.0	90.00	89.99	8,490.0	1,762.1	2,407.9	518,686.36	562,331.71	32° 25' 33.300 N	104° 15' 55.048 W	
10,600.0	90.00	89.99	8,490.0	1,762.1	2,507.9	518,686.39	562,431.71	32° 25' 33.300 N	104° 15' 53.881 W	
10,700.0	90.00	89.99	8,490.0	1,762.1	2,607.9	518,686.41	562,531.71	32° 25' 33.300 N	104° 15' 52.714 W	
10,800.0	90.00	89.99	8,490.0	1,762.1	2,707.9	518,686.43	562,631.71	32° 25' 33.299 N	104° 15' 51.548 W	
10,900.0	90.00	89.99	8,490.0	1,762.2	2,807.9	518,686.45	562,731.71	32° 25' 33.299 N	104° 15' 50.381 W	
11,000.0	90.00	89.99	8,490.0	1,762.2	2,907.9	518,686.48	562,831.71	32° 25' 33.298 N	104° 15' 49.214 W	
11,100.0	90.00	89.99	8,490.0	1,762.2	3,007.9	518,686.50	562,931.71	32° 25' 33.298 N	104° 15' 48.047 W	
11,115.9	90.00	89.99	8,490.0	1,762.2	3,023.8	518,686.50	562,947.65	32° 25' 33.298 N	104° 15' 47.861 W	
Start DLS 2.00 TFO 87.03 - PP2 WB 131H										
11,116.9	90.00	90.01	8,490.0	1,762.2	3,024.8	518,686.50	562,948.58	32° 25' 33.298 N	104° 15' 47.850 W	
Start 7836.7 hold at 11116.9 MD										
11,200.0	90.00	90.01	8,490.0	1,762.2	3,107.9	518,686.49	563,031.71	32° 25' 33.297 N	104° 15' 46.880 W	
11,300.0	90.00	90.01	8,490.0	1,762.2	3,207.9	518,686.48	563,131.71	32° 25' 33.296 N	104° 15' 45.714 W	
11,400.0	90.00	90.01	8,490.0	1,762.2	3,307.9	518,686.47	563,231.71	32° 25' 33.296 N	104° 15' 44.547 W	
11,500.0	90.00	90.01	8,490.0	1,762.2	3,407.9	518,686.46	563,331.71	32° 25' 33.295 N	104° 15' 43.380 W	
11,600.0	90.00	90.01	8,490.0	1,762.2	3,507.9	518,686.45	563,431.71	32° 25' 33.294 N	104° 15' 42.213 W	
11,700.0	90.00	90.01	8,490.0	1,762.2	3,607.9	518,686.44	563,531.71	32° 25' 33.293 N	104° 15' 41.047 W	
11,800.0	90.00	90.01	8,490.0	1,762.1	3,707.9	518,686.43	563,631.71	32° 25' 33.293 N	104° 15' 39.880 W	
11,900.0	90.00	90.01	8,490.0	1,762.1	3,807.9	518,686.42	563,731.71	32° 25' 33.292 N	104° 15' 38.713 W	
12,000.0	90.00	90.01	8,490.0	1,762.1	3,907.9	518,686.41	563,831.71	32° 25' 33.291 N	104° 15' 37.546 W	
12,100.0	90.00	90.01	8,490.0	1,762.1	4,007.9	518,686.41	563,931.71	32° 25' 33.290 N	104° 15' 36.380 W	
12,200.0	90.00	90.01	8,490.0	1,762.1	4,107.9	518,686.40	564,031.71	32° 25' 33.290 N	104° 15' 35.213 W	
12,300.0	90.00	90.01	8,490.0	1,762.1	4,207.9	518,686.39	564,131.71	32° 25' 33.289 N	104° 15' 34.046 W	

PERMIAN

RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO STATE COM 131H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO STATE COM 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
12,400.0	90.00	90.01	8,490.0	1,762.1	4,307.9	518,686.38	564,231.71	32° 25' 33.288 N	104° 15' 32.879 W	
12,500.0	90.00	90.01	8,490.0	1,762.1	4,407.9	518,686.37	564,331.71	32° 25' 33.287 N	104° 15' 31.713 W	
12,600.0	90.00	90.01	8,490.0	1,762.1	4,507.9	518,686.36	564,431.71	32° 25' 33.286 N	104° 15' 30.546 W	
12,700.0	90.00	90.01	8,490.0	1,762.1	4,607.9	518,686.35	564,531.71	32° 25' 33.286 N	104° 15' 29.379 W	
12,800.0	90.00	90.01	8,490.0	1,762.0	4,707.9	518,686.34	564,631.71	32° 25' 33.285 N	104° 15' 28.212 W	
12,900.0	90.00	90.01	8,490.0	1,762.0	4,807.9	518,686.33	564,731.71	32° 25' 33.284 N	104° 15' 27.046 W	
13,000.0	90.00	90.01	8,490.0	1,762.0	4,907.9	518,686.32	564,831.71	32° 25' 33.283 N	104° 15' 25.879 W	
13,100.0	90.00	90.01	8,490.0	1,762.0	5,007.9	518,686.31	564,931.71	32° 25' 33.282 N	104° 15' 24.712 W	
13,200.0	90.00	90.01	8,490.0	1,762.0	5,107.9	518,686.30	565,031.71	32° 25' 33.282 N	104° 15' 23.545 W	
13,300.0	90.00	90.01	8,490.0	1,762.0	5,207.9	518,686.29	565,131.71	32° 25' 33.281 N	104° 15' 22.379 W	
13,400.0	90.00	90.01	8,490.0	1,762.0	5,307.9	518,686.28	565,231.71	32° 25' 33.280 N	104° 15' 21.212 W	
13,500.0	90.00	90.01	8,490.0	1,762.0	5,407.9	518,686.27	565,331.71	32° 25' 33.279 N	104° 15' 20.045 W	
13,600.0	90.00	90.01	8,490.0	1,762.0	5,507.9	518,686.26	565,431.71	32° 25' 33.278 N	104° 15' 18.878 W	
13,700.0	90.00	90.01	8,490.0	1,762.0	5,607.9	518,686.25	565,531.71	32° 25' 33.278 N	104° 15' 17.711 W	
13,800.0	90.00	90.01	8,490.0	1,761.9	5,707.9	518,686.24	565,631.71	32° 25' 33.277 N	104° 15' 16.545 W	
13,900.0	90.00	90.01	8,490.0	1,761.9	5,807.9	518,686.23	565,731.71	32° 25' 33.276 N	104° 15' 15.378 W	
14,000.0	90.00	90.01	8,490.0	1,761.9	5,907.9	518,686.22	565,831.71	32° 25' 33.275 N	104° 15' 14.211 W	
14,100.0	90.00	90.01	8,490.0	1,761.9	6,007.9	518,686.21	565,931.71	32° 25' 33.274 N	104° 15' 13.044 W	
14,200.0	90.00	90.01	8,490.0	1,761.9	6,107.9	518,686.20	566,031.71	32° 25' 33.273 N	104° 15' 11.878 W	
14,300.0	90.00	90.01	8,490.0	1,761.9	6,207.9	518,686.19	566,131.71	32° 25' 33.273 N	104° 15' 10.711 W	
14,400.0	90.00	90.01	8,490.0	1,761.9	6,307.9	518,686.18	566,231.71	32° 25' 33.272 N	104° 15' 9.544 W	
14,500.0	90.00	90.01	8,490.0	1,761.9	6,407.9	518,686.17	566,331.71	32° 25' 33.271 N	104° 15' 8.377 W	
14,600.0	90.00	90.01	8,490.0	1,761.9	6,507.9	518,686.16	566,431.71	32° 25' 33.270 N	104° 15' 7.211 W	
14,700.0	90.00	90.01	8,490.0	1,761.9	6,607.9	518,686.15	566,531.71	32° 25' 33.269 N	104° 15' 6.044 W	
14,800.0	90.00	90.01	8,490.0	1,761.8	6,707.9	518,686.14	566,631.71	32° 25' 33.268 N	104° 15' 4.877 W	
14,900.0	90.00	90.01	8,490.0	1,761.8	6,807.9	518,686.13	566,731.71	32° 25' 33.267 N	104° 15' 3.710 W	
15,000.0	90.00	90.01	8,490.0	1,761.8	6,907.9	518,686.12	566,831.71	32° 25' 33.267 N	104° 15' 2.544 W	
15,100.0	90.00	90.01	8,490.0	1,761.8	7,007.9	518,686.11	566,931.71	32° 25' 33.266 N	104° 15' 1.377 W	
15,200.0	90.00	90.01	8,490.0	1,761.8	7,107.9	518,686.10	567,031.71	32° 25' 33.265 N	104° 15' 0.210 W	
15,300.0	90.00	90.01	8,490.0	1,761.8	7,207.9	518,686.09	567,131.71	32° 25' 33.264 N	104° 14' 59.043 W	
15,400.0	90.00	90.01	8,490.0	1,761.8	7,307.9	518,686.08	567,231.71	32° 25' 33.263 N	104° 14' 57.877 W	
15,500.0	90.00	90.01	8,490.0	1,761.8	7,407.9	518,686.07	567,331.71	32° 25' 33.262 N	104° 14' 56.710 W	
15,600.0	90.00	90.01	8,490.0	1,761.8	7,507.9	518,686.06	567,431.71	32° 25' 33.261 N	104° 14' 55.543 W	
15,700.0	90.00	90.01	8,490.0	1,761.8	7,607.9	518,686.05	567,531.71	32° 25' 33.261 N	104° 14' 54.376 W	
15,800.0	90.00	90.01	8,490.0	1,761.7	7,707.9	518,686.04	567,631.71	32° 25' 33.260 N	104° 14' 53.210 W	
15,900.0	90.00	90.01	8,490.0	1,761.7	7,807.9	518,686.03	567,731.71	32° 25' 33.259 N	104° 14' 52.043 W	
16,000.0	90.00	90.01	8,490.0	1,761.7	7,907.9	518,686.02	567,831.71	32° 25' 33.258 N	104° 14' 50.876 W	
16,100.0	90.00	90.01	8,490.0	1,761.7	8,007.9	518,686.01	567,931.71	32° 25' 33.257 N	104° 14' 49.709 W	
16,200.0	90.00	90.01	8,490.0	1,761.7	8,107.9	518,686.00	568,031.71	32° 25' 33.256 N	104° 14' 48.543 W	
16,300.0	90.00	90.01	8,490.0	1,761.7	8,207.9	518,685.99	568,131.71	32° 25' 33.255 N	104° 14' 47.376 W	
16,400.0	90.00	90.01	8,490.0	1,761.7	8,307.9	518,685.98	568,231.71	32° 25' 33.254 N	104° 14' 46.209 W	
16,500.0	90.00	90.01	8,490.0	1,761.7	8,407.9	518,685.97	568,331.71	32° 25' 33.253 N	104° 14' 45.042 W	
16,600.0	90.00	90.01	8,490.0	1,761.7	8,507.9	518,685.96	568,431.71	32° 25' 33.252 N	104° 14' 43.875 W	
16,700.0	90.00	90.01	8,490.0	1,761.7	8,607.9	518,685.95	568,531.71	32° 25' 33.252 N	104° 14' 42.709 W	
16,800.0	90.00	90.01	8,490.0	1,761.7	8,707.9	518,685.94	568,631.71	32° 25' 33.251 N	104° 14' 41.542 W	
16,900.0	90.00	90.01	8,490.0	1,761.6	8,807.9	518,685.93	568,731.71	32° 25' 33.250 N	104° 14' 40.375 W	
17,000.0	90.00	90.01	8,490.0	1,761.6	8,907.9	518,685.92	568,831.71	32° 25' 33.249 N	104° 14' 39.208 W	
17,100.0	90.00	90.01	8,490.0	1,761.6	9,007.9	518,685.91	568,931.71	32° 25' 33.248 N	104° 14' 38.042 W	
17,200.0	90.00	90.01	8,490.0	1,761.6	9,107.9	518,685.90	569,031.71	32° 25' 33.247 N	104° 14' 36.875 W	
17,300.0	90.00	90.01	8,490.0	1,761.6	9,207.9	518,685.89	569,131.71	32° 25' 33.246 N	104° 14' 35.708 W	
17,400.0	90.00	90.01	8,490.0	1,761.6	9,307.9	518,685.88	569,231.71	32° 25' 33.245 N	104° 14' 34.541 W	
17,500.0	90.00	90.01	8,490.0	1,761.6	9,407.9	518,685.87	569,331.71	32° 25' 33.244 N	104° 14' 33.375 W	
17,600.0	90.00	90.01	8,490.0	1,761.6	9,507.9	518,685.86	569,431.71	32° 25' 33.243 N	104° 14' 32.208 W	
17,700.0	90.00	90.01	8,490.0	1,761.6	9,607.9	518,685.85	569,531.71	32° 25' 33.242 N	104° 14' 31.041 W	
17,800.0	90.00	90.01	8,490.0	1,761.6	9,707.9	518,685.84	569,631.71	32° 25' 33.241 N	104° 14' 29.874 W	

PERMIAN


RESOURCES

Planning Report - Geographic

Database:	Compass_17	Local Co-ordinate Reference:	Well WATER BUFFALO STATE COM 131H
Company:	NEW MEXICO	TVD Reference:	KB @ 3233.0usft
Project:	(SP) EDDY	MD Reference:	KB @ 3233.0usft
Site:	WATER BUFFALO	North Reference:	Grid
Well:	WATER BUFFALO STATE COM 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
17,900.0	90.00	90.01	8,490.0	1,761.5	9,807.9	518,685.84	569,731.71	32° 25' 33.240 N	104° 14' 28.708 W	
18,000.0	90.00	90.01	8,490.0	1,761.5	9,907.9	518,685.83	569,831.71	32° 25' 33.239 N	104° 14' 27.541 W	
18,100.0	90.00	90.01	8,490.0	1,761.5	10,007.9	518,685.82	569,931.71	32° 25' 33.238 N	104° 14' 26.374 W	
18,200.0	90.00	90.01	8,490.0	1,761.5	10,107.9	518,685.81	570,031.71	32° 25' 33.237 N	104° 14' 25.207 W	
18,300.0	90.00	90.01	8,490.0	1,761.5	10,207.9	518,685.80	570,131.71	32° 25' 33.237 N	104° 14' 24.041 W	
18,400.0	90.00	90.01	8,490.0	1,761.5	10,307.9	518,685.79	570,231.71	32° 25' 33.236 N	104° 14' 22.874 W	
18,500.0	90.00	90.01	8,490.0	1,761.5	10,407.9	518,685.78	570,331.71	32° 25' 33.235 N	104° 14' 21.707 W	
18,600.0	90.00	90.01	8,490.0	1,761.5	10,507.9	518,685.77	570,431.71	32° 25' 33.234 N	104° 14' 20.540 W	
18,700.0	90.00	90.01	8,490.0	1,761.5	10,607.9	518,685.76	570,531.71	32° 25' 33.233 N	104° 14' 19.374 W	
18,800.0	90.00	90.01	8,490.0	1,761.5	10,707.9	518,685.75	570,631.71	32° 25' 33.232 N	104° 14' 18.207 W	
18,900.0	90.00	90.01	8,490.0	1,761.4	10,807.9	518,685.74	570,731.71	32° 25' 33.231 N	104° 14' 17.040 W	
18,953.6	90.00	90.01	8,490.0	1,761.4	10,861.5	518,685.73	570,785.32	32° 25' 33.230 N	104° 14' 16.415 W	
TD at 18953.6 - LTP/BHL WB 131H										

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
FTP WB 131H - plan misses target center by 197.8usft at 8641.2usft MD (8350.9 TVD, 1761.7 N, 586.1 E) - Point	0.00	0.00	8,490.0	1,761.6	445.5	518,685.92	560,369.34	32° 25' 33.308 N	104° 16' 17.944 W	
LTP/BHL WB 131H - plan hits target center - Point	0.00	0.00	8,490.0	1,761.4	10,861.5	518,685.73	570,785.32	32° 25' 33.230 N	104° 14' 16.415 W	
PP2 WB 131H - plan hits target center - Point	0.00	0.00	8,490.0	1,762.2	3,023.8	518,686.50	562,947.65	32° 25' 33.298 N	104° 15' 47.861 W	

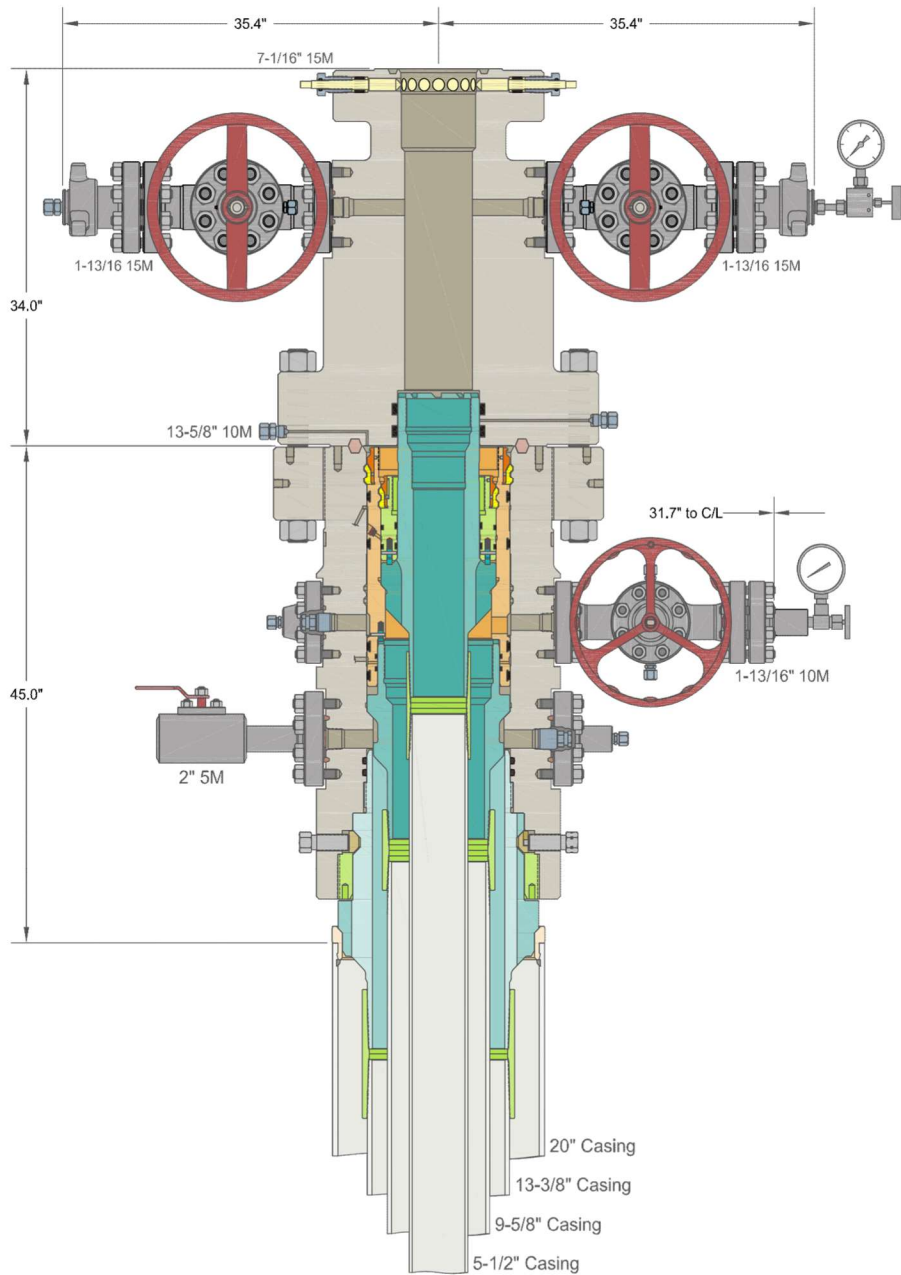

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC		CENTENNIAL RESOURCE DEVELOPMENT LEE CO, NM	
20" x 13-3/8" x 9-5/8" x 5-1/2" 10M MBU-3T-CFL-R-DBLO System With 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head, 20" Landing Ring & Pin Down Mandrel Casing Hangers	DRAWN	DLE	10JUN20
	APPRV		
DRAWING NO.		HBE0000338	

Permian Resources

Multi-Well Pad Batch Drilling Procedure

Surface Casing - PR intends to Batch set all surface casing to a depth approved in the APD. Surface Holes will be batch drilled by a rig. Appropriate notifications will be made prior to spudding the well, running and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill Surface hole to Approved Depth with Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run and land planned surface casing see Illustration 1-1 Below to depth approved in APD.
3. Set packoff and test to 5k psi
4. Offline Cement
5. Install wellhead with pressure gauge and nightcap. Nightcap is shown on final wellhead Stack up Illustration #2-2.
6. Skid Rig to adjacent well to drill Surface hole.
7. Surface casing test will be performed by the rig in order to allow ample time for Cement to develop 500psi compressive strength. Casing test to 0.22 psi/ft or 1500 psi whichever is greater - not to exceed 70% casing burst.

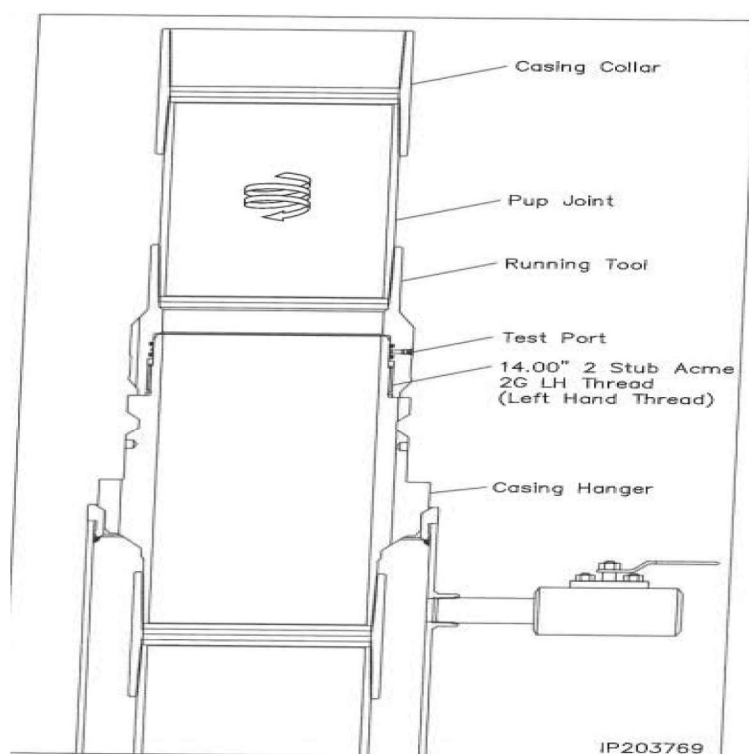


Illustration 1-1

Intermediate Casing – PR intends to Batch set all intermediate casing strings to a depth approved in the APD. Intermediate Holes will be batch drilled by the rig. Appropriate notifications will be made prior to testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Test Surface casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
3. Install wear bushing then drill out surface casing shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
4. Drill Intermediate hole to approved casing point. Trip out of hole with BHA to run Casing.
5. Remove wear bushing then run and land Intermediate Casing with mandrel hanger in wellhead.
6. Cement casing to surface with floats holding.
7. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
8. Install pack-off and test void to 5,000 psi for 15 minutes. Nightcap shown on final wellhead stack up illustration 2-2 on page 3.
9. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
10. Install nightcap – skid rig to adjacent well to drill Intermediate hole.

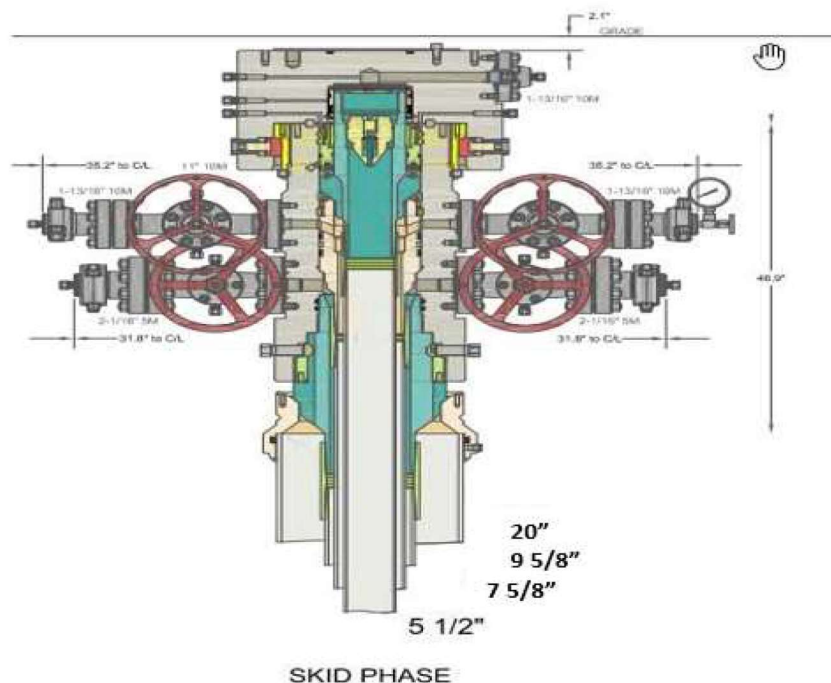


Illustration 2-2

Production Casing – PR intends to Batch set all Production casings with Rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Drilling Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run Production Casing.
6. Remove wear bushing then run Production casing to TD landing casing mandrel in wellhead.
7. Cement Production string with floats holding.
8. Run in with wash tool and wash wellhead area – install pack-off and test void to 5,000psi for 15 minutes.
9. Install BPV in Production mandrel hanger – Nipple down BOPE and install nightcap.
10. Test nightcap void to 5,000 psi for 30 minutes per illustration 2-2
11. Skid rig to adjacent well on pad to drill production hole.



ContiTech Fluid Technology

ContiTech Oil & Marine Corp. # 11535 Brittmoore Park Dr., Houston, TX 77041-6916 USA CONSIGNEE / Ship-to address: HELMERICH & PAYNE INT'L DRILLING CO ATTN: FLEX RIG WHSE - B-BAY 210 MAGNOLIA DRIVE GALENA PARK TX 77547		Packing list / Delivery note Document No. 71461553 Document Date 28.01.2022 Customer Number 11697 Customer VAT No. Supplier Number Purchase Order No. 740362040 Purchase Order Date 18.01.2022 Sales Order Number 1388153 Sales Order Date 18.01.2022 Unloading Point RAN-No.	
Buyer: HELMERICH & PAYNE INT'L DRILLING CO 1437 SOUTH BOULDER 74119 TULSA		Page 1 of 2 Weights (Gross / Net) Total Gross Weight 2,507.000 LB Total Net Weight 2,507.000 LB	
Conditions Incoterms EXW Houston Ex Works			
Item	Material/Description	Quantity	Net Weight Gross Weight
20	Buyer: Jack Peebles E-mail: Jackie.Peebles@hpinc.com Tel: 832-782-6000 Rig/Whse: HOW 00RECERTIFY Recert of HP Hoses Serial# 67094 Commodity Code: 3" X 35 FT 10K Choke & Kill Hoses API 16C End 1: 4 - 1/16" 10Kpsi API Spec 6A Type 6BX Flange End 2: 4 - 1/16" 10Kpsi API Spec 6A Type 6BX Flange c/w BX155 ring groove each end Standard: API Spec 16C - Monogrammed Working Pressure: 10.000psi Test Pressure: 15.000psi Inspection & Certification includes: External inspection of the hose & couplings Internal boroscopic inspection of hose liner Hydrostatic pressure test of hose assembly Repair of any external damage to hose body and end connections (limited to minor repairs). Clean & protect end connections Inspection Report Disposal of hose assembly if hose fails inspection and recertification process. Please Flush Hoses before sending them to our Facility.	1 PC	2,507.000 LB 2,507.000 LB

ContiTech Rubber Industrial Kft.
 H-6728 Szeged Budapesti út 10.
 P. O. Box 152 Szeged H-6701
 Phone: (62)566-700, Fax: (62)566-713
 Tax Number: 11087209-2-06
 EU Community VAT: HU11087209
 Registration No.: Cg. 0609-002502
 Registry Court: Csongrád Megyei Cégbíróság

COMMERZBANK ZRT. (HUF)
 H-1054 Budapest, Széchenyi rakpart 8.
 H-1245 Budapest P.O. Box 1070
 Account No.: 14220108-26830003
 IBAN: HU83 1422 0108 2683 0003 0000 0000
 SWIFT: COBA HU HXXX

COMMERZBANK AG Hannover (EUR)
 30159 Hannover, Theaterstr. 11-12.
 Account No.: 3 066 156 00
 Sort Code: 250 400 66
 BIC: COBADEFF250
 IBAN: DE41250400660306615600

Record Rotary Hose sleeve number on the CBC Made Hose List!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!



Hydrostatic Test Certificate

ContiTech


Certificate Number H100122	COM Order Reference 1388153	Customer Name & Address HELMERICH & PAYNE DRILLING CO 1434 SOUTH BOULDER AVE TULSA, OK 74119 USA
Customer Purchase Order No: 740362040		
Project:		
Test Center Address ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston, TX 77041 USA	Accepted by COM Inspection Signed: Gerson Mejia-Lazo Date: 02/09/22	Accepted by Client Inspection

We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

Item	Part No.	Description	Qty	Serial Number	Work. Press. (psi)	Test Press. (psi)	Test Time (minutes)
20	RECERTIFICATION	3" ID 10K Choke and Kill Hose x 35ft OAL	1	67094	10,000	15,000	60

Record Information	
Start Time	1/27/2022 13:21:21
End Time	1/27/2022 14:38:28
Interval	00:01:00
Number	78
MaxValue	15849
MinValue	-3
AvgValue	14240
RecordName	67094-sh
RecordNumber	199

Gauge Information	
Model	ADT680
SN	21817380014
Range	(0-40000)psi
Unit	psi

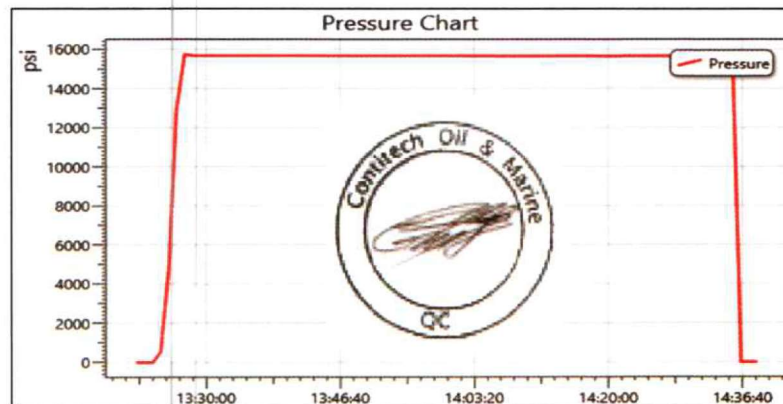

Permian Resources

BOP Break Testing Variance Procedure

Subject: Request for a Variance Allowing break Testing of the Blowout Preventer Equipment (BOPE). Permian Resources requests a variance to ONLY test broken pressure seals on the BOPE and function test BOP when skidding a drilling rig between multiple wells on a pad.

Background

Title 43 CFR 3172, Drilling Operations, Sections 6.b.9.iv states that the BOP test must be performed whenever any seal subject to test pressure is broken. The current interpretation of the Bureau of Land Management (BLM) requires a complete BOP test and not just a test of the affected component. 43 CFR 3172.13, Variances from minimum standards states, "An operator may request the authorized officer to approve a variance from any of the minimum standards prescribed in [§§ 3172.6](#) through [3172.12](#). All such requests shall be submitted in writing to the appropriate authorized officer and provide information as to the circumstances which warrant approval of the variance(s) requested and the proposed alternative methods by which the related minimum standard(s) are to be satisfied. The authorized officer, after considering all relevant factors, if appropriate, may approve the requested variance(s) if it is determined that the proposed alternative(s) meet or exceed the objectives of the applicable minimum standard(s)". Permian Resources feels the break testing the BOPE is such a situation. Therefore, as per 43 CFR 3172.13, Permian Resources submits this request for the variance.

Supporting Documentation

The language used in 43 CFR 3172 became effective on December 19, 1988 and has remained the standard for regulating BLM onshore drilling operations for over 30 years. During this time, there have been significant changes in drilling technology. The BLM continues to use the variance request process to allow for the use of modern technology and acceptable engineering practices that have arisen since 43 CFR 3172 was originally released. The Permian Resources drilling rig fleet has many modern upgrades that allow the intact BOP stack to be moved between well slots on a multi-well pad, as well as, wellhead designs that incorporate quick connects facilitating release of the BOP from the wellhead without breaking any BOP stack components apart. These technologies have been used extensively offshore, and other regulators, API, and many operators around the world have endorsed break testing as safe and reliable.

Figure 1: Winch System attached to BOP Stack


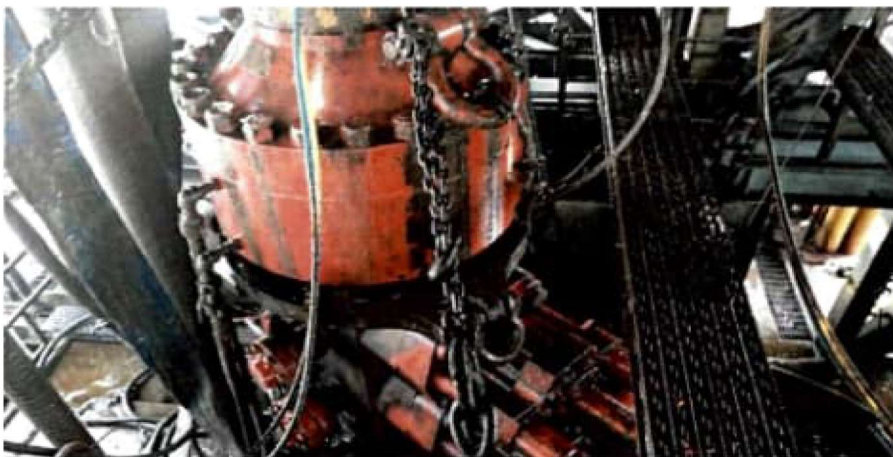


Figure 2: BOP Winch System

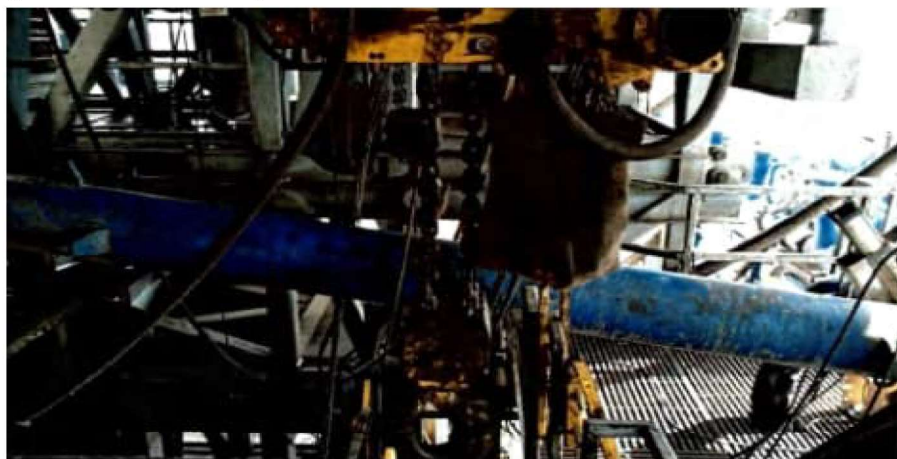

American Petroleum Institute (API) standards, specification and recommended practices are considered the industry standard and are consistently utilized and referenced by the industry. 43 CFR 3172 recognizes API recommended Practices (RP) 53 in its original development. API Standard 53, Well Control Equipment Systems for Drilling Wells (Fifth Edition, December 2018, Annex C, Table C.4) recognizes break testing as an acceptable practice. Specifically, API Standard 53, Section 5.3.7.1 states "A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component." See Table C.4 below for reference.

62

API STANDARD 53

Table C.4—Initial Pressure Testing, Surface BOP Stacks

Component to be Pressure Tested	Pressure Test—Low Pressure ^{a,c} psig (MPa)	Pressure Test—High Pressure ^{a,c}	
		Change Out of Component, Elastomer, or Ring Gasket	No Change Out of Component, Elastomer, or Ring Gasket
Annular preventer ^b	250 to 350 (1.72 to 2.41)	RWP of annular preventer	MASP or 70% annular RWP, whichever is lower.
Fixed pipe, variable bore, blind, and BSR preventers ^{b,c}	250 to 350 (1.72 to 2.41)	RWP of ram preventer or wellhead system, whichever is lower	ITP
Choke and kill line and BOP side outlet valves below ram preventers (both sides)	250 to 350 (1.72 to 2.41)	RWP of side outlet valve or wellhead system, whichever is lower	ITP
Choke manifold—upstream of chokes ^a	250 to 350 (1.72 to 2.41)	RWP of ram preventers or wellhead system, whichever is lower	ITP
Choke manifold—downstream of chokes ^a	250 to 350 (1.72 to 2.41)	RWP of valve(s), line(s), or MASP for the well program, whichever is lower	
Kelly, kelly valves, drill pipe safety valves, IBOPs	250 to 350 (1.72 to 2.41)	MASP for the well program	

^a Pressure test evaluation periods shall be a minimum of five minutes.

No visible leaks.

The pressure shall remain stable during the evaluation period. The pressure shall not decrease below the intended test pressure.

^b Annular(s) and VBR(s) shall be pressure tested on the largest and smallest OD drill pipe to be used in well program.

^c For pad drilling operations, moving from one wellhead to another within the 21 days, pressure testing is required for pressure-containing and pressure-controlling connections when the integrity of a pressure seal is broken.

^d For surface offshore operations, the ram BOPs shall be pressure tested with the ram locks engaged and the closing and locking pressure vented during the initial test. For land operations, the ram BOPs shall be pressure tested with the ram locks engaged and the closing and locking pressure vented at commissioning and annually.

^e Adjustable chokes are not required to be full sealing devices. Pressure testing against a closed choke is not required.

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specification and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations.


Break testing has been approved by the BLM in the past with other operators based on the detailed information provided in this document.

Permian Resources feels break testing and our current procedures meet the intent of 43 CFR 3172 and often exceed it. There has been no evidence that break testing results in more components failing than seen on full BOP tests. Permian Resources internal standards require complete BOPE tests more often than that of 43 CFR 3172 (every 21 days). In addition to function testing the annular, pipe rams and blind rams after each BOP nipple up, Permian Resources performs a choke drill with the rig crew prior to drilling out every casing shoe. This is additional training for the rig crew that exceeds the requirements of 43 CFR 3172.

Procedures

- 1) Permian Resources will use this document for our break testing plan for New Mexico Delaware Basin. The summary below will be referenced in the APD or Sundry Notice and receive approval prior to implementing this variance.
- 2) Permian Resources will perform BOP break testing on multi-wells pads where multiple intermediate sections can be drilled and cased within the 21-day BOP test window.
 - a) A full BOP test will be conducted on the first well on the pad.
 - b) The first intermediate hole section drilled on the pad will be the deepest. All the remaining hole sections will be the same formation depth or shallower.
 - c) A full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.
 - d) A full BOP test will be required prior to drilling any production hole.
- 3) After performing a complete BOP test on the first well, the intermediate hole section will be drilled and cased, two breaks would be made on the BOP equipment.
 - a) Between the HCV valve and choke line connection
 - b) Between the BOP quick connect and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by a hydraulic system.
- 5) After skidding to the next well, the BOP is moved to the wellhead by the same hydraulic system and installed.
- 6) The connections mentioned in 3a and 3b will then be reconnected.
- 7) Install test plug into the wellhead using test joint or drill pipe.
- 8) A shell test is performed against the upper pipe rams testing the two breaks.
- 9) The shell test will consist of a 250 psi low test and a high test to the value submitted in the APD or Sundry (e.g. 5,000 psi or 10,000psi).
- 10) Function tests will be performed on the following components: lower pipe rams, blind rams, and annular.
- 11) For a multi-well pad the same two breaks on the BOP would be made and on the next wells and steps 4 through 10 would be repeated.
- 12) A second break test would only be done if the intermediate hole section being drilled could not be completed within the 21 day BOP test window.

Note: Picture below highlights BOP components that will be tested during batch operations

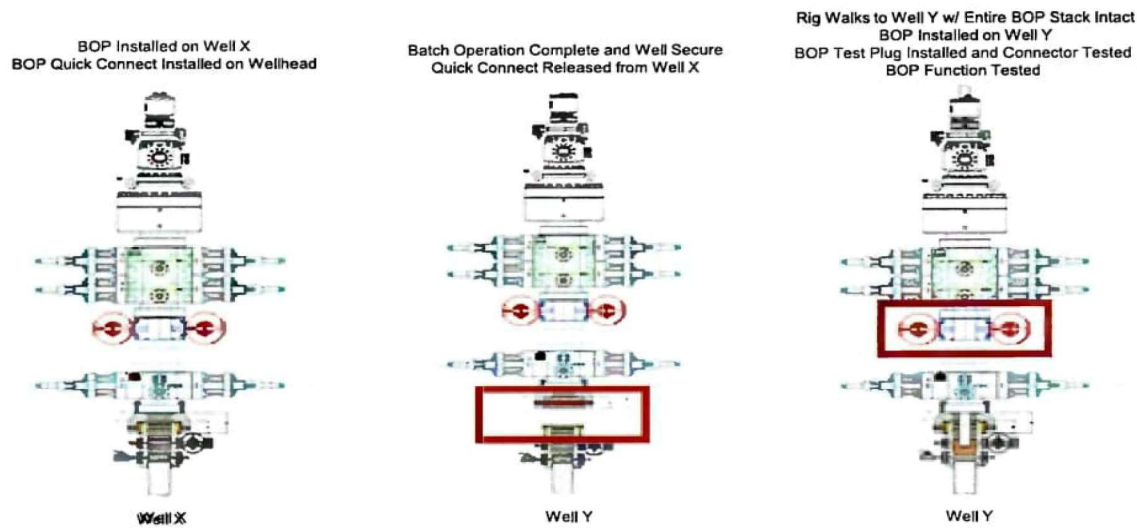


Summary

A variance is requested to ONLY test broken pressure seals on the BOP equipment when moving from wellhead to wellhead which is in compliance with API Standard 53. API Standard 53 states, that for pad drilling operations, moving from one wellhead to another within 21 days, pressure testing is required for pressure-containing and pressure-controlling connections when the integrity of a pressure seal is broken.

The BOP will be secured by a hydraulic carrier or cradle. The BLM will be contacted if a Well Control event occurs prior to the commencement of a BOPE Break Testing operation.


Based on public data and the supporting documentation submitted herein to the BLM, we will request permission to ONLY retest broken pressure seals if the following conditions are met:

- 1) After a full BOP test is conducted on the first well on the pad.
- 2) The first intermediate hole section drilled on the pad will be the deepest. All the remaining hole sections will be the same depth or shallower.
- 3) A full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.
- 4) A full BOP test will be required prior to drilling the production hole.

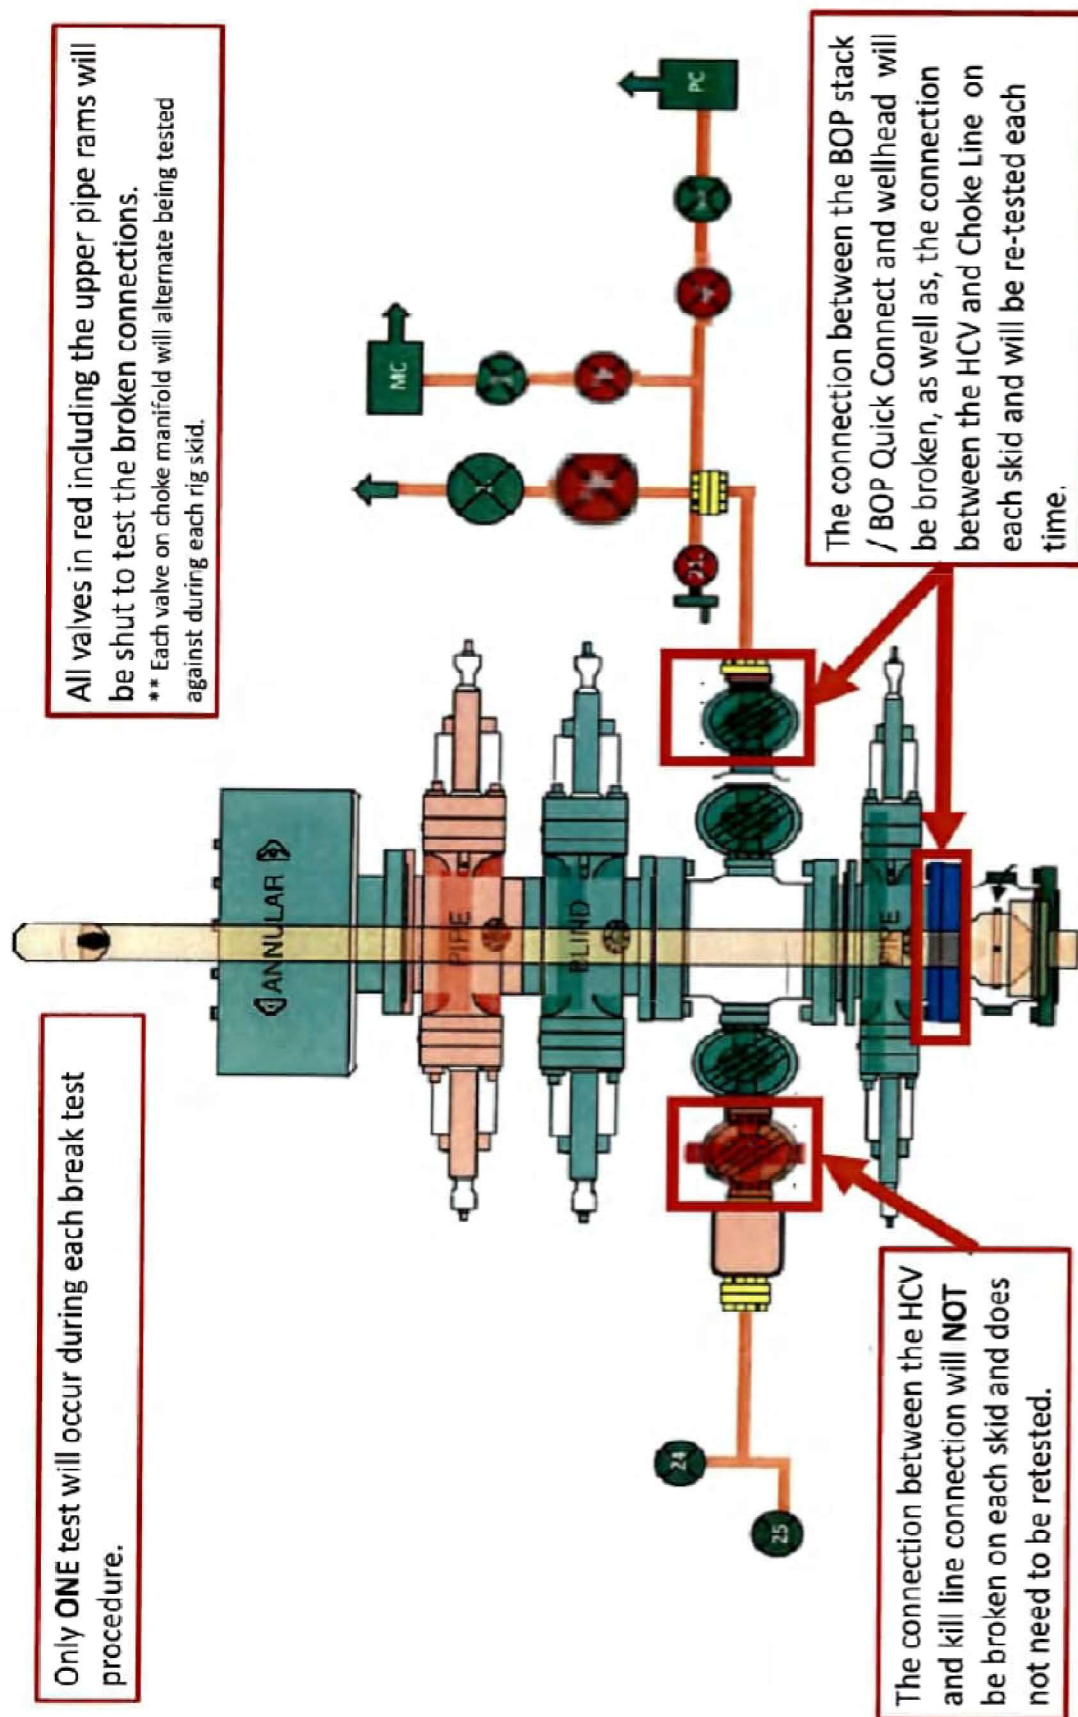


Permian Resources Offline Cementing Procedure Surface & Intermediate Casing


1. Drill hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and casing to Depth.
3. Land casing with mandrel.
4. Circulate 1.5 csg capacity.
5. Flow test – Confirm well is static and floats are holding.
6. Set Annular packoff and pressure test. Test to 5k.
7. Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Rig down cementers and equipment
16. Install night cap with pressure gauge to monitor.

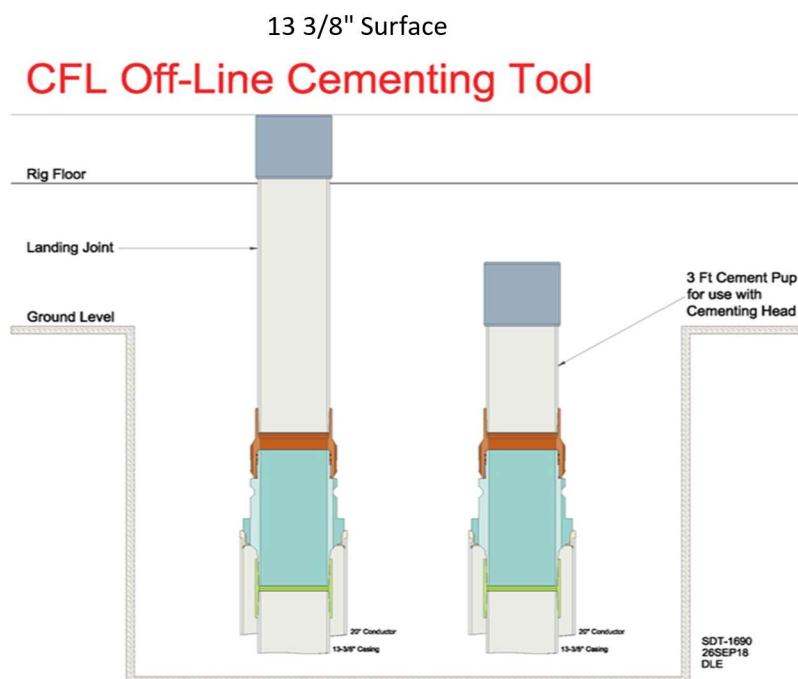


Intermediate

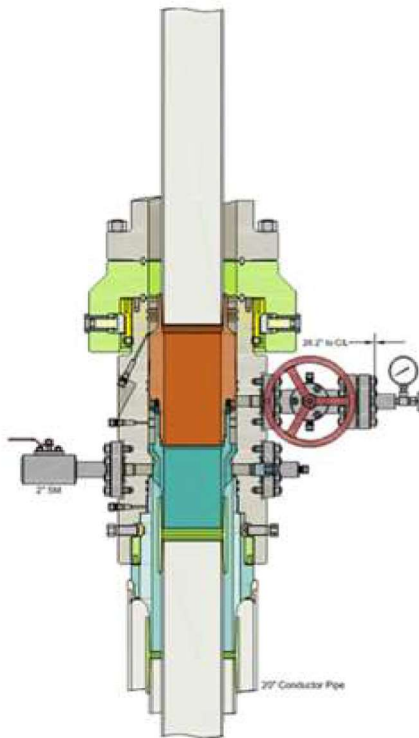

Run 7 5/8" Casing
Land Casing on 7 5/8" Mandrel Hanger
Cement 7 5/8" Casing
Retrieve Running Tool

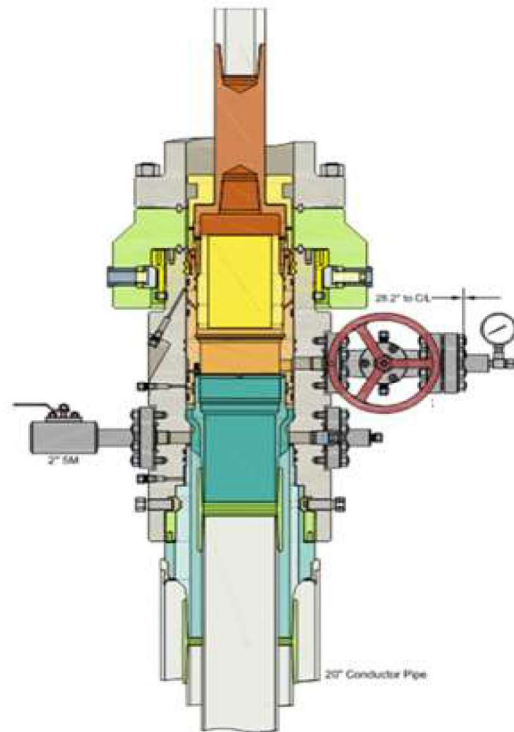

Run 9 5/8" Packoff
Test Upper and Lower Seals
Engage Lockring
Retrieve Running Tool

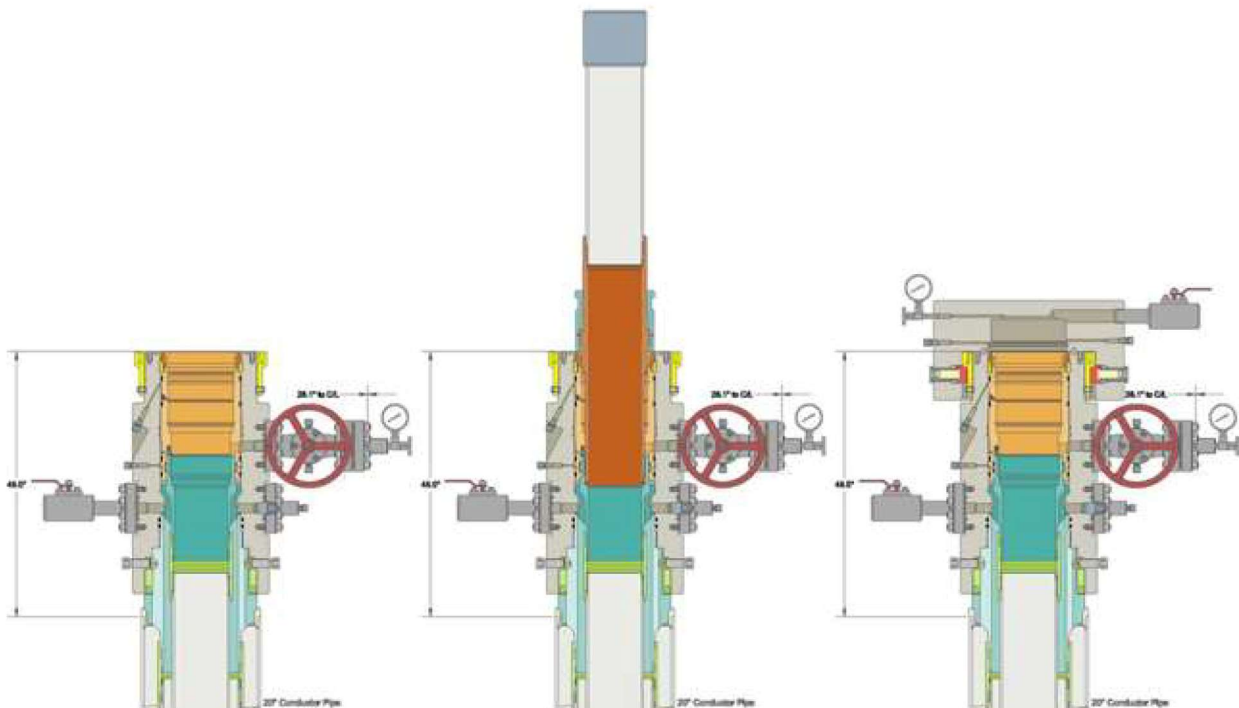



Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 487463

CONDITIONS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 487463
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	8/12/2025

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 380382

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701		2. OGRID Number 372165
4. Property Code 335407		3. API Number 30-015-55968
5. Property Name WATER BUFFALO		6. Well No. 121H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
I	3	22S	26E		2359	S	346	E	Eddy

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
A	1	22S	26E	1	330	N	100	E	Eddy

9. Pool Information

Esperanza; Bone Spring	97755
------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3201
16. Multiple N	17. Proposed Depth 17951	18. Formation Bone Spring	19. Contractor	20. Spud Date 6/8/2025
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	300	250	0
Int1	12.25	9.625	40	1700	2510	0
Prod	8.75	5.5	20	17951	4010	1200

Casing/Cement Program: Additional Comments

DV Tool Contingency Plan attached in the forms as a variance
--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature:	OIL CONSERVATION DIVISION
Printed Name: Electronically filed by Stephanie Rabadue	Approved By: Matthew Gomez
Title: Regulatory Manager	Title:
Email Address: stephanie.rabadue@permianres.com	Approved Date: 1/9/2025 Expiration Date: 1/9/2027
Date: 12/26/2024 Phone: 432-260-4388	Conditions of Approval Attached

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
			☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-015-55968	Pool Code 97755	Pool Name Esperanza; Bone Spring
Property Code 335407	Property Name WATER BUFFALO	Well Number 121H
OGRID No. 372165	Operator Name PERMIAN RESOURCES OPERATING, LLC	Ground Level Elevation 3,201.00'
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☒ State ☒ Fee ☐ Tribal ☐ Federal

Surface Location

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 2,359' FSL	Ft. from E/W 346' FEL	Latitude 32.421090°	Longitude -104.273196°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Bottom Hole Location

UL LOT 1	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 330' FNL	Ft. from E/W 100' FEL	Latitude 32.427739°	Longitude -104.237901°	County EDDY
--------------------	---------------------	------------------------	---------------------	-----	---------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Dedicated Acres 322.24	Infill or Defining Well Defining	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers.			Well setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 2,359' FSL	Ft. from E/W 346' FEL	Latitude 32.421090°	Longitude -104.273196°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

First Take Point (FTP)

UL LOT 4	Section 2	Township 22S	Range 26E	Lot	Ft. from N/S 330' FNL	Ft. from E/W 100' FWL	Latitude 32.427761°	Longitude -104.271613°	County EDDY
--------------------	---------------------	------------------------	---------------------	-----	---------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Last Take Point (LTP)

UL LOT 1	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 330' FNL	Ft. from E/W 100' FEL	Latitude 32.427739°	Longitude -104.237901°	County EDDY
--------------------	---------------------	------------------------	---------------------	-----	---------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☐ Horizontal ☐ Vertical	Ground Floor Elevation:
---	---	-------------------------

OPERATOR CERTIFICATIONS I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.		SURVEYOR CERTIFICATIONS I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  Date: 11/18/2024	
Signature <i>Cassie Evans</i> Date 12/24/24		Signature and Seal of Professional Surveyor	
Printed Name Cassie Evans		Certificate Number 12177	Date of Survey 11/18/2024
Email Address Cassie.Evans@permianres.com			

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

[illegible]

NAD 83 X = 570,782.26'
NAD 83 Y = 519,355.73'
NAD 83 LAT = 32.427739°
NAD 83 LONG = -104.237901°
NAD 27 X = 529,601.16'
NAD 27 Y = 519,295.85'
NAD 27 LAT = 32.427621°
NAD 27 LONG = -104.237396°

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 380382

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: Permian Resources Operating, LLC [372165] 300 N. Marienfeld St Ste 1000 Midland, TX 79701	API Number: 30-015-55968
	Well: WATER BUFFALO #121H

OCD Reviewer	Condition
matthew.gomez	Notify the OCD 24 hours prior to casing & cement.
matthew.gomez	File As Drilled C-102 and a directional Survey with C-104 completion packet.
matthew.gomez	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.
matthew.gomez	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
matthew.gomez	Cement is required to circulate on both surface and intermediate1 strings of casing.
matthew.gomez	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.
matthew.gomez	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.
matthew.gomez	Fresh water must be used in the Capitan Reef.

[illegible]

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF
██████████		████	████
██████████		████	████
██████████		████	██████
██████████		████	██████
██████████		████	██████
██████████		████	████
██████████		████	████
██████████		████	██████
██████████		████	██████
██████████		████	██████
██████████		████	██████
██████████		████	██████
██████████		████	████
██████████		████	████
██████████		████	██████
██████████		████	██████
██████████		████	██████

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☒ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☒ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☒ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☒ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☒ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☐ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☒ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☒ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 

Printed Name: Cassie Evans

Title: Regulatory Supervisor

E-mail Address: Cassie.Evans@permianres.com

Date: 12/07/24

Phone: 432-313-1732





OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)

Approved By:

Title:

Approval Date:

Conditions of Approval:

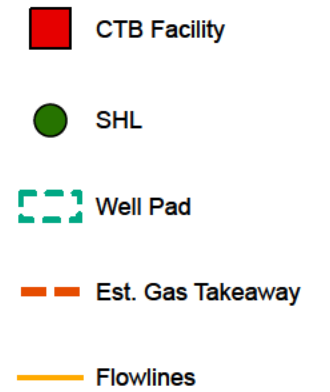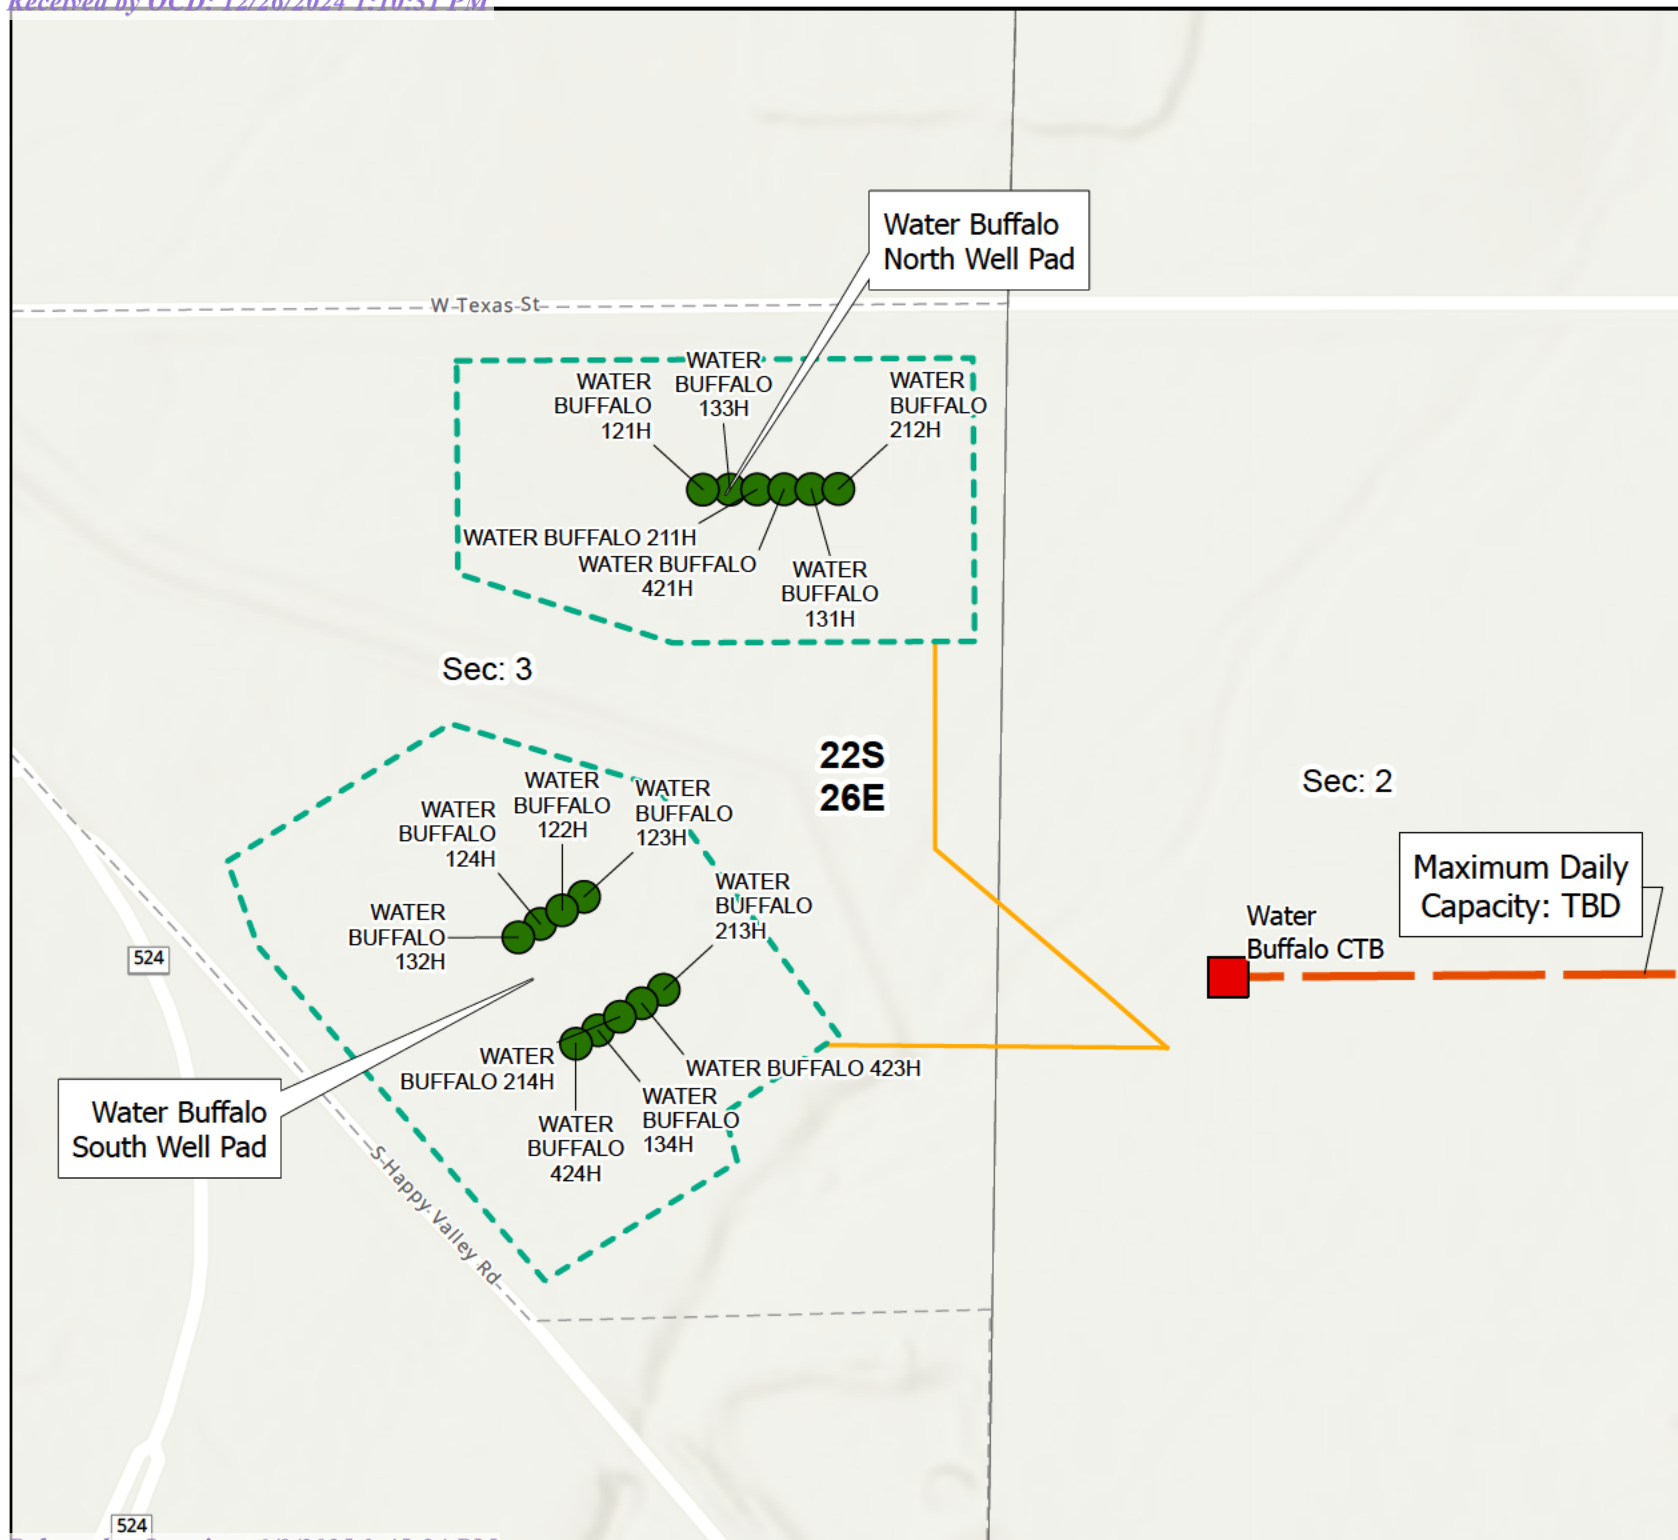




NM APD NGMP Water Buffalo

Eddy County, New Mexico

Created Date: 9/30/2024	Revised Date: 12/11/2024
Author: C. Evans	Drafter: T. Douglass

Rev. 1: 09/30/2024

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 380392

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701		2. OGRID Number 372165
		3. API Number 30-015-56150
4. Property Code 335407	5. Property Name WATER BUFFALO	6. Well No. 132H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
I	3	22S	26E		1780	S	540	E	Eddy

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
H	1	22S	26E	H	2251	N	100	E	Eddy

9. Pool Information

ESPERANZA;BONESPRING	97755
----------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3185
16. Multiple N	17. Proposed Depth 19051	18. Formation Bone Spring	19. Contractor	20. Spud Date 6/8/2025
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☐ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	300	250	0
Int1	12.25	9.625	40	1700	2490	0
Prod	8.75	5.5	20	19051	3680	1200

Casing/Cement Program: Additional Comments

DV Tool Contingency attached in the forms

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature:	OIL CONSERVATION DIVISION
Printed Name: Electronically filed by Stephanie Rabadue	Approved By: Matthew Gomez
Title: Regulatory Manager	Title:
Email Address: stephanie.rabadue@permianres.com	Approved Date: 2/10/2025 Expiration Date: 2/10/2027
Date: 12/26/2024 Phone: 432-260-4388	Conditions of Approval Attached

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
			☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-015-56150	Pool Code 97755	Pool Name Esperanza; Bone Spring
Property Code 335407	Property Name WATER BUFFALO	Well Number 132H
OGRID No. 372165	Operator Name PERMIAN RESOURCES OPERATING, LLC	Ground Level Elevation 3,185.00'
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☒ State ☒ Fee ☐ Tribal ☐ Federal

Surface Location

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 1,780' FSL	Ft. from E/W 540' FEL	Latitude 32.419483°	Longitude -104.273858°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Bottom Hole Location

UL H	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 2,251' FNL	Ft. from E/W 100' FEL	Latitude 32.422458°	Longitude -104.237878°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Dedicated Acres 320	Infill or Defining Well Infill	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers.			Well setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 1,780' FSL	Ft. from E/W 540' FEL	Latitude 32.419483°	Longitude -104.273858°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------


First Take Point (FTP)

UL E	Section 2	Township 22S	Range 26E	Lot	Ft. from N/S 2,224' FNL	Ft. from E/W 100' FWL	Latitude 32.422555°	Longitude -104.271721°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Last Take Point (LTP)

UL H	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 2,251' FNL	Ft. from E/W 100' FEL	Latitude 32.422458°	Longitude -104.237878°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☐ Horizontal ☐ Vertical	Ground Floor Elevation:
---	---	-------------------------


OPERATOR CERTIFICATIONS I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.		SURVEYOR CERTIFICATIONS I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  Date: 11/18/2024	
Signature <i>Cassie Evans</i>		Signature and Seal of Professional Surveyor	
Date 12/24/24			
Printed Name Cassie Evans		Certificate Number 12177	Date of Survey 11/18/2024
Email Address Cassie.Evans@permianres.com			

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

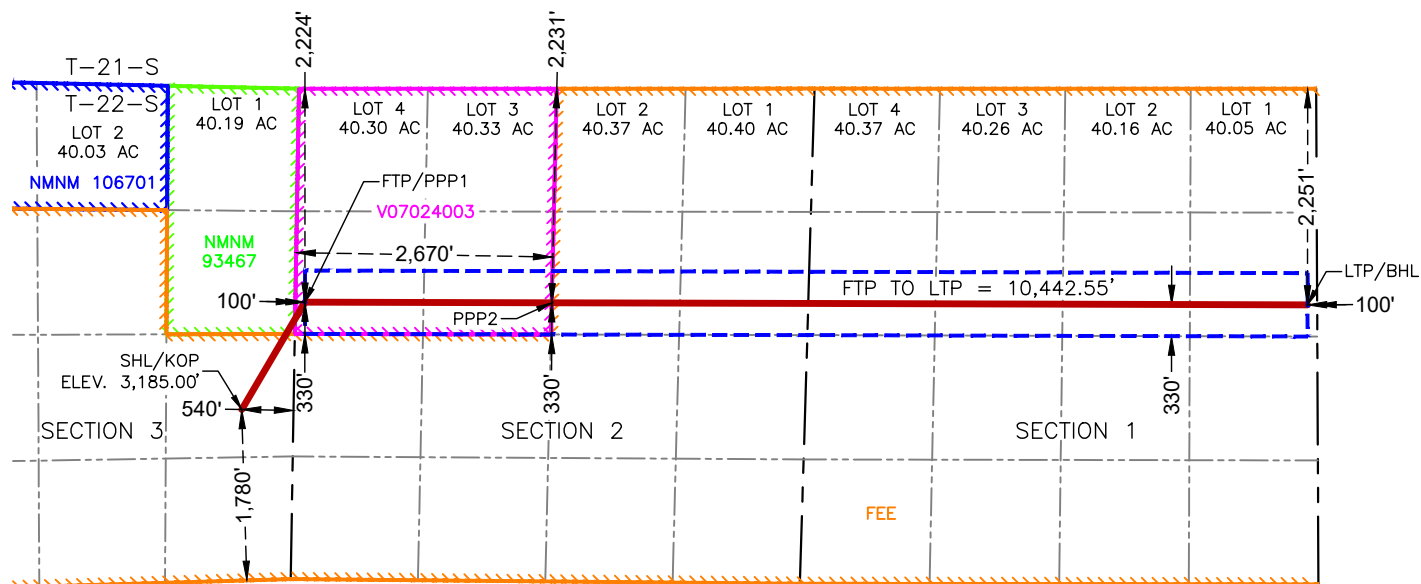

**SURFACE HOLE LOCATION
& KICK-OFF POINT
1,780' FSL & 540' FEL
ELEV. = 3,185.00'**

NAD 83 X = 559,689.59'
NAD 83 Y = 516,344.26'
NAD 83 LAT = 32.419483°
NAD 83 LONG = -104.273858°
NAD 27 X = 518,508.63'
NAD 27 Y = 516,284.64'
NAD 27 LAT = 32.419366°
NAD 27 LONG = -104.273352°

**FIRST TAKE POINT &
PENETRATION POINT 1
2,224' FNL & 100' FWL**

NAD 83 X = 560,348.52'
NAD 83 Y = 517,462.05'
NAD 83 LAT = 32.422555°
NAD 83 LONG = -104.271721°
NAD 27 X = 519,167.56'
NAD 27 Y = 517,402.38'
NAD 27 LAT = 32.422437°
NAD 27 LONG = -104.271215°

**PENETRATION POINT 2
2,231' FNL & 2,670' FWL**

NAD 83 X = 562,918.97'
NAD 83 Y = 517,455.82'
NAD 83 LAT = 32.422533°
NAD 83 LONG = -104.263390°
NAD 27 X = 521,737.96'
NAD 27 Y = 517,396.11'
NAD 27 LAT = 32.422416°
NAD 27 LONG = -104.262885°

**LAST TAKE POINT &
BOTTOM HOLE LOCATION
2,251' FNL & 100' FEL**

NAD 83 X = 570,791.04'
NAD 83 Y = 517,434.73'
NAD 83 LAT = 32.422458°
NAD 83 LONG = -104.237878°
NAD 27 X = 529,609.89'
NAD 27 Y = 517,374.90'
NAD 27 LAT = 32.422341°
NAD 27 LONG = -104.237373°

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 380387

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701		2. OGRID Number 372165
		3. API Number 30-015-56111
4. Property Code 335407	5. Property Name WATER BUFFALO	6. Well No. 124H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
I	3	22S	26E		1797	S	516	E	Eddy

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
P	1	22S	26E	P	990	S	100	E	Eddy

9. Pool Information

ESPERANZA;BONESPRING	97755
----------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type Private	15. Ground Level Elevation 3185
16. Multiple N	17. Proposed Depth 17548	18. Formation Bone Spring	19. Contractor	20. Spud Date 6/13/2025
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	300	250	0
Int1	12.25	9.625	40	1700	2490	0
Prod	8.75	5.5	20	17548	3980	1200

Casing/Cement Program: Additional Comments

DV Tool Contingency Variance request in the forms

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature:	OIL CONSERVATION DIVISION
Printed Name: Electronically filed by Stephanie Rabadue	Approved By: Matthew Gomez
Title: Regulatory Manager	Title:
Email Address: stephanie.rabadue@permianres.com	Approved Date: 1/31/2025 Expiration Date: 1/31/2027
Date: 12/26/2024 Phone: 432-260-4388	Conditions of Approval Attached

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
			☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-015-56111	Pool Code 97755	Pool Name Esperanza; Bone Spring
Property Code 335407	Property Name WATER BUFFALO	Well Number 124H
OGRID No. 372165	Operator Name PERMIAN RESOURCES OPERATING, LLC	Ground Level Elevation 3,185.00'
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal

Surface Location

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 1,797' FSL	Ft. from E/W 516' FEL	Latitude 32.419532°	Longitude -104.273780°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Bottom Hole Location

UL P	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 990' FSL	Ft. from E/W 100' FEL	Latitude 32.417177°	Longitude -104.237855°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	---------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Dedicated Acres 320	Infill or Defining Well Infill	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers.			Well setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 1,797' FSL	Ft. from E/W 516' FEL	Latitude 32.419532°	Longitude -104.273780°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------


First Take Point (FTP)

UL M	Section 2	Township 22S	Range 26E	Lot	Ft. from N/S 990' FSL	Ft. from E/W 100' FWL	Latitude 32.417347°	Longitude -104.271829°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	---------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Last Take Point (LTP)

UL P	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 990' FSL	Ft. from E/W 100' FEL	Latitude 32.417177°	Longitude -104.237855°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	---------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation:
---	--	-------------------------


OPERATOR CERTIFICATIONS I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.		SURVEYOR CERTIFICATIONS I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  Date: 11/18/2024	
Signature <i>Cassie Evans</i> Date 12/24/24		Signature and Seal of Professional Surveyor	
Printed Name Cassie Evans		Certificate Number 12177	Date of Survey 11/18/2024
Email Address Cassie.Evans@permianres.com			

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

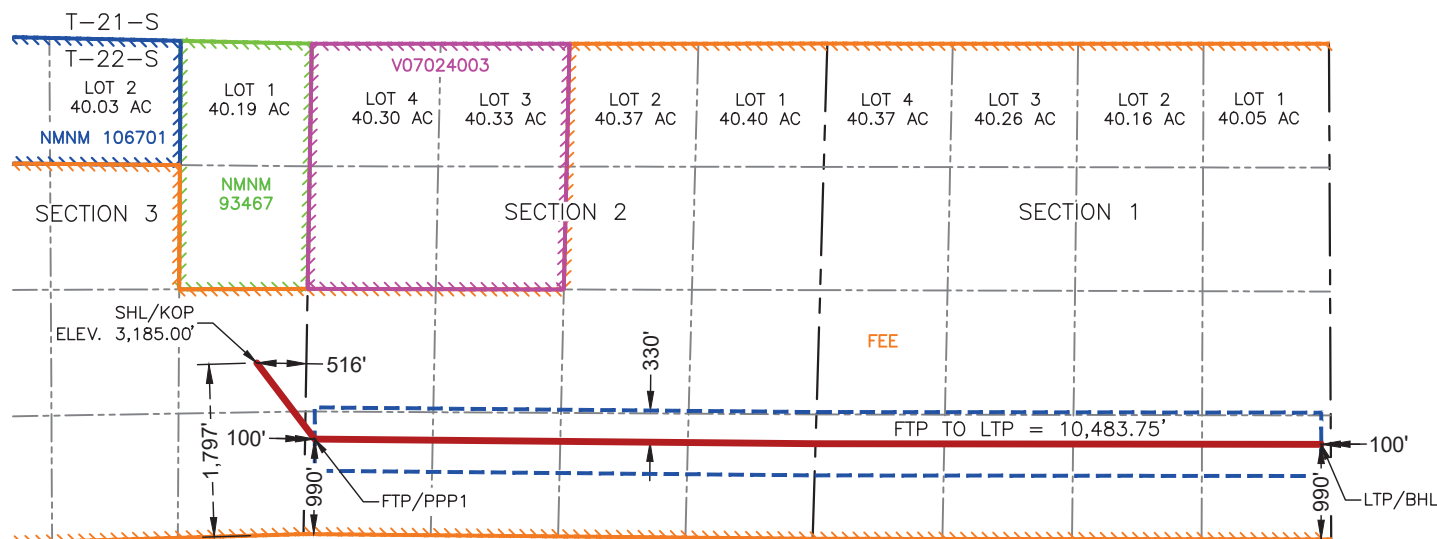

SURFACE HOLE LOCATION
& KICK-OFF POINT
1,797' FSL & 516' FEL
ELEV. = 3,185.00'

NAD 83 X = 559,713.85'
NAD 83 Y = 516,361.91'
NAD 83 LAT = 32.419532°
NAD 83 LONG = -104.273780°
NAD 27 X = 518,532.88'
NAD 27 Y = 516,302.29'
NAD 27 LAT = 32.419414°
NAD 27 LONG = -104.273274°

FIRST TAKE POINT &
PENETRATION POINT 1
990' FSL & 100' FWL

NAD 83 X = 560,316.29'
NAD 83 Y = 515,567.67'
NAD 83 LAT = 32.417347°
NAD 83 LONG = -104.271829°
NAD 27 X = 519,135.30'
NAD 27 Y = 515,508.05'
NAD 27 LAT = 32.417230°
NAD 27 LONG = -104.271323°

LAST TAKE POINT &
BOTTOM HOLE LOCATION
990' FSL & 100' FEL

NAD 83 X = 570,799.81'
NAD 83 Y = 515,513.31'
NAD 83 LAT = 32.417177°
NAD 83 LONG = -104.237855°
NAD 27 X = 529,618.63'
NAD 27 Y = 515,453.53'
NAD 27 LAT = 32.417059°
NAD 27 LONG = -104.237351°

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 380383

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701		2. OGRID Number 372165
		3. API Number 30-015-56153
4. Property Code 335407	5. Property Name WATER BUFFALO	6. Well No. 122H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
I	3	22S	26E		1814	S	492	E	Eddy

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
H	1	22S	26E	H	1650	N	100	E	Eddy

9. Pool Information

ESPERANZA;BONESPRING	97755
----------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3188
16. Multiple N	17. Proposed Depth 17716	18. Formation Bone Spring	19. Contractor	20. Spud Date 6/8/2025
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	300	250	0
Int1	12.25	9.625	40	1700	2490	0
Prod	8.75	5.5	20	17716	3990	1200

Casing/Cement Program: Additional Comments

DV Tool Contingency attached in the forms

22. Proposed Blowout Prevention Program


Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature:	OIL CONSERVATION DIVISION
Printed Name: Electronically filed by Stephanie Rabadue	Approved By: Matthew Gomez
Title: Regulatory Manager	Title:
Email Address: stephanie.rabadue@permianres.com	Approved Date: 2/10/2025 Expiration Date: 2/10/2027
Date: 12/26/2024 Phone: 432-260-4388	Conditions of Approval Attached

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

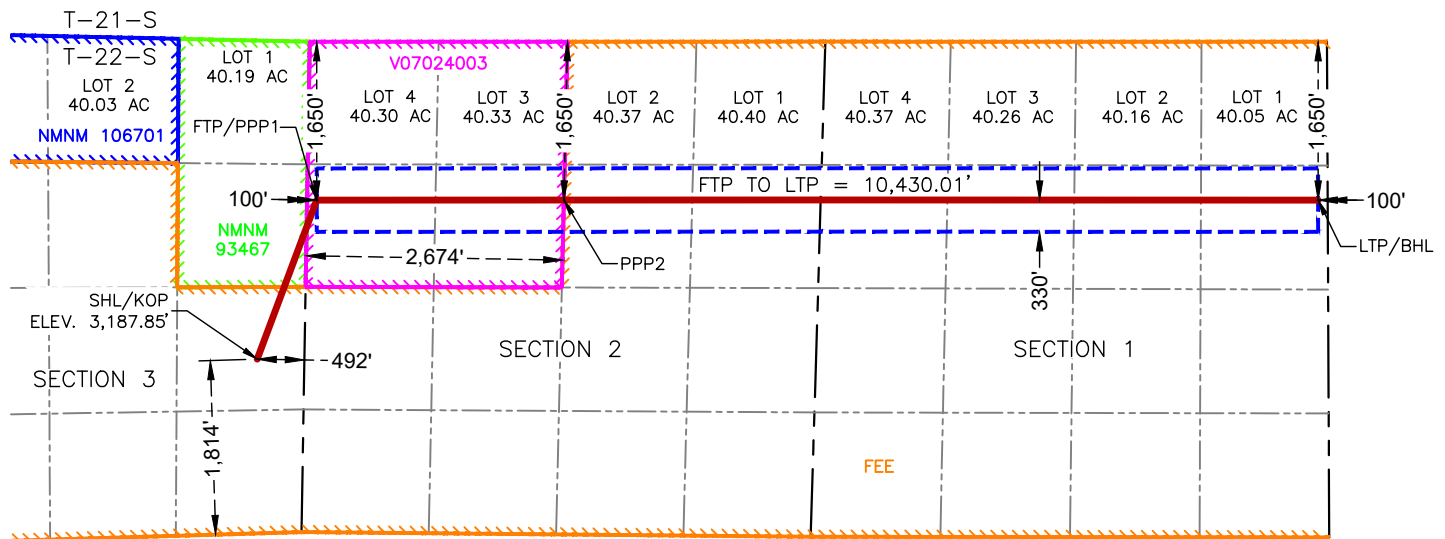

**SURFACE HOLE LOCATION
& KICK-OFF POINT
1,814' FSL & 492' FEL
ELEV. = 3,187.85'**

NAD 83 X = 559,738.10'
NAD 83 Y = 516,379.57'
NAD 83 LAT = 32.419580°
NAD 83 LONG = -104.273701°
NAD 27 X = 518,557.14'
NAD 27 Y = 516,319.95'
NAD 27 LAT = 32.419463°
NAD 27 LONG = -104.273195°

**FIRST TAKE POINT &
PENETRATION POINT 1
1,650' FNL & 100' FWL**

NAD 83 X = 560,358.28'
NAD 83 Y = 518,035.92'
NAD 83 LAT = 32.424132°
NAD 83 LONG = -104.271688°
NAD 27 X = 519,177.33'
NAD 27 Y = 517,976.23'
NAD 27 LAT = 32.424015°
NAD 27 LONG = -104.271182°

**PENETRATION POINT 2
1,650' FNL & 2,674' FWL**

NAD 83 X = 562,932.50'
NAD 83 Y = 518,036.63'
NAD 83 LAT = 32.424130°
NAD 83 LONG = -104.263345°
NAD 27 X = 521,751.50'
NAD 27 Y = 517,976.90'
NAD 27 LAT = 32.424012°
NAD 27 LONG = -104.262840°

**LAST TAKE POINT &
BOTTOM HOLE LOCATION
1,650' FNL & 100' FEL**

NAD 83 X = 570,788.29'
NAD 83 Y = 518,035.73'
NAD 83 LAT = 32.424111°
NAD 83 LONG = -104.237885°
NAD 27 X = 529,607.16'
NAD 27 Y = 517,975.88'
NAD 27 LAT = 32.423993°
NAD 27 LONG = -104.237381°

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 380384

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701		2. OGRID Number 372165
		3. API Number 30-015-56156
4. Property Code 335407	5. Property Name WATER BUFFALO	6. Well No. 123H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
I	3	22S	26E		1831	S	468	E	Eddy

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
I	1	22S	26E	I	2251	S	100	E	Eddy

9. Pool Information

ESPERANZA;BONESPRING	97755
----------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type Private	15. Ground Level Elevation 3186
16. Multiple N	17. Proposed Depth 17428	18. Formation Bone Spring	19. Contractor	20. Spud Date 6/9/2025
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	300	250	0
Int1	12.25	9.625	40	1700	2490	0
Prod	8.75	5.5	20	17428	3970	1200

Casing/Cement Program: Additional Comments

DV Tool Contingency Plan in the forms

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature:	OIL CONSERVATION DIVISION
Printed Name: Electronically filed by Stephanie Rabadue	Approved By: Matthew Gomez
Title: Regulatory Manager	Title:
Email Address: stephanie.rabadue@permianres.com	Approved Date: 2/10/2025 Expiration Date: 2/10/2027
Date: 12/26/2024 Phone: 432-260-4388	Conditions of Approval Attached

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
			☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-015-56156	Pool Code 97755	Pool Name Esperanza; Bone Spring
Property Code 335407	Property Name WATER BUFFALO	Well Number 123H
OGRID No. 372165	Operator Name PERMIAN RESOURCES OPERATING, LLC	Ground Level Elevation 3,186.00'
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal

Surface Location

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 1,831' FSL	Ft. from E/W 468' FEL	Latitude 32.419629°	Longitude -104.273622°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Bottom Hole Location

UL I	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 2,251' FSL	Ft. from E/W 100' FEL	Latitude 32.420644°	Longitude -104.237870°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Dedicated Acres 320	Infill or Defining Well Defining	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers.			Well setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL I	Section 3	Township 22S	Range 26E	Lot	Ft. from N/S 1,831' FSL	Ft. from E/W 468' FEL	Latitude 32.419629°	Longitude -104.273622°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------


First Take Point (FTP)

UL L	Section 2	Township 22S	Range 26E	Lot	Ft. from N/S 2,225' FSL	Ft. from E/W 100' FWL	Latitude 32.420741°	Longitude -104.271758°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Last Take Point (LTP)

UL I	Section 1	Township 22S	Range 26E	Lot	Ft. from N/S 2,251' FSL	Ft. from E/W 100' FEL	Latitude 32.420644°	Longitude -104.237870°	County EDDY
----------------	---------------------	------------------------	---------------------	-----	-----------------------------------	---------------------------------	-------------------------------	----------------------------------	-----------------------

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☐ Horizontal ☐ Vertical	Ground Floor Elevation:
---	---	-------------------------


OPERATOR CERTIFICATIONS I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.		SURVEYOR CERTIFICATIONS I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  Date: 11/18/2024	
Signature <i>Cassie Evans</i> Date 12/24/24		Signature and Seal of Professional Surveyor	
Printed Name Cassie Evans		Certificate Number 12177	Date of Survey 11/18/2024
Email Address Cassie.Evans@permianres.com			

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

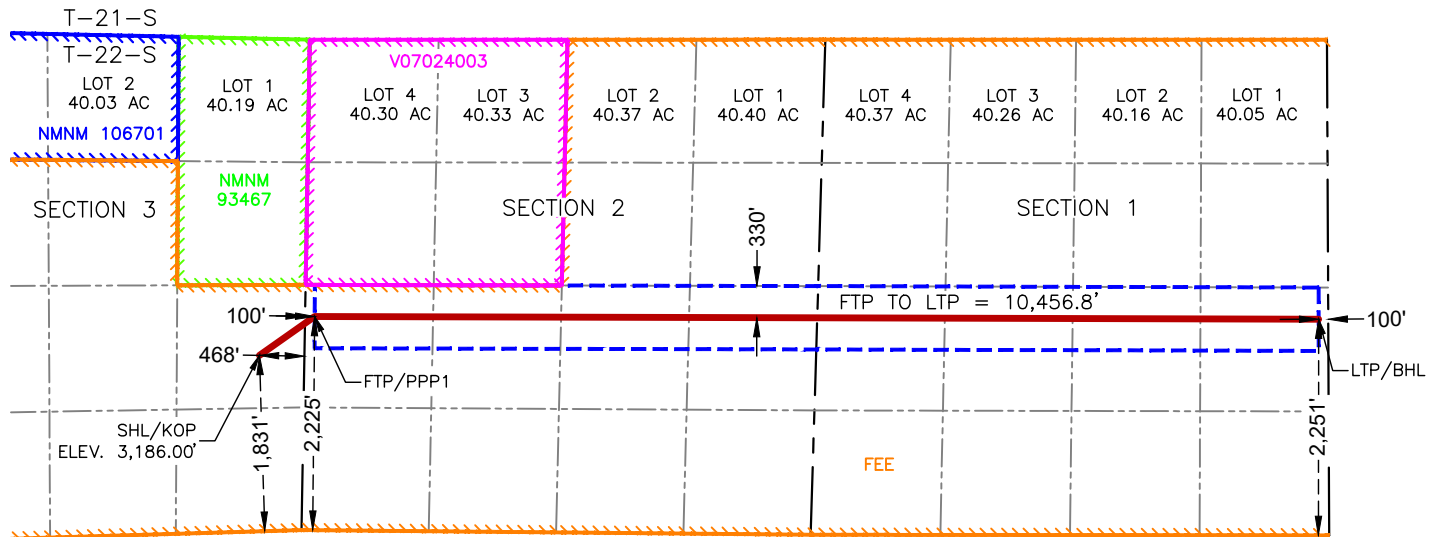

**SURFACE HOLE LOCATION
& KICK-OFF POINT
1,831' FSL & 468' FEL
ELEV. = 3,186.00'**

NAD 83 X = 559,762.36'
NAD 83 Y = 516,397.23'
NAD 83 LAT = 32.419629°
NAD 83 LONG = -104.273622°
NAD 27 X = 518,581.39'
NAD 27 Y = 516,337.60'
NAD 27 LAT = 32.419511°
NAD 27 LONG = -104.273117°

**FIRST TAKE POINT &
PENETRATION POINT 1
2,225' FSL & 100' FWL**

NAD 83 X = 560,337.29'
NAD 83 Y = 516,802.07'
NAD 83 LAT = 32.420741°
NAD 83 LONG = -104.271758°
NAD 27 X = 519,156.32'
NAD 27 Y = 516,742.43'
NAD 27 LAT = 32.420623°
NAD 27 LONG = -104.271253°

**LAST TAKE POINT &
BOTTOM HOLE LOCATION
2,251' FSL & 100' FEL**

NAD 83 X = 570,794.05'
NAD 83 Y = 516,774.72'
NAD 83 LAT = 32.420644°
NAD 83 LONG = -104.237870°
NAD 27 X = 529,612.90'
NAD 27 Y = 516,714.91'
NAD 27 LAT = 32.420526°
NAD 27 LONG = -104.237366°



Well Information



API10	Well Name	Well Number	Well Status	Operator Company Name	County/Parish	Spud Date
30-015-56103	WATER BUFFALO STATE COM	214H	DUC	Permian Resources	Eddy	8/30/2025
30-015-55970	WATER BUFFALO STATE COM	211H	DUC	Permian Resources	Eddy	9/4/2025
30-015-56123	WATER BUFFALO STATE COM	213H	DUC	Permian Resources	Eddy	8/29/2025
30-015-55965	WATER BUFFALO STATE COM	421H	DUC	Permian Resources	Eddy	9/6/2025
30-015-55972	WATER BUFFALO STATE COM	212H	DUC	Permian Resources	Eddy	9/4/2025
30-015-55967	WATER BUFFALO STATE COM	424H	DUC	Permian Resources	Eddy	8/30/2025
30-015-55966	WATER BUFFALO STATE COM	423H	DUC	Permian Resources	Eddy	8/30/2025
30-015-56151	WATER BUFFALO	133H	Permit	Permian Resources	Eddy	
30-015-55969	WATER BUFFALO STATE COM	131H	Permit	Permian Resources	Eddy	
30-015-55968	WATER BUFFALO	121H	Permit	Permian Resources	Eddy	
30-015-56150	WATER BUFFALO	132H	Permit	Permian Resources	Eddy	
30-015-56111	WATER BUFFALO	124H	Permit	Permian Resources	Eddy	
30-015-56153	WATER BUFFALO	122H	Permit	Permian Resources	Eddy	
30-015-56156	WATER BUFFALO	123H	Permit	Permian Resources	Eddy	

Full Details for WATER BUFFALO STATE COM 214H

API #	30-015-56103
API # +4	30-015-56103-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 214H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419198
Longitude	-104.273494
Well Type	Gas
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3187
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	18911
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2025-01-30
Spud Date	2025-08-30
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO STATE COM 211H

API #	30-015-55970
API # +4	30-015-55970-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 211H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.421091
Longitude	-104.273001
Well Type	Gas
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3202
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	19013
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2024-12-26
Spud Date	2025-09-04
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO STATE COM 213H

API #	30-015-56123
API # +4	30-015-56123-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 213H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419295
Longitude	-104.273337
Well Type	Gas
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3187
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	18876
True Total Depth	0

Permit Date	2025-02-04
Approved Date	2025-02-04
Spud Date	2025-08-29
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO STATE COM 421H

API #	30-015-55965
API # +4	30-015-55965-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 421H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.421092
Longitude	-104.272904
Well Type	Gas
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3201
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	19126
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2024-12-26
Spud Date	2025-09-06
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO STATE COM 212H

API #	30-015-55972
API # +4	30-015-55972-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 212H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.421093
Longitude	-104.272709
Well Type	Gas
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3202
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	18684
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2024-12-26
Spud Date	2025-09-05
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO STATE COM 424H

API #	30-015-55967
API # +4	30-015-55967-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 424H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419101
Longitude	-104.273651
Well Type	Gas
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3187
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	19523
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2024-12-26
Spud Date	2025-08-30
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO STATE COM 423H

API #	30-015-55966
API # +4	30-015-55966-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 423H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419247
Longitude	-104.273415
Well Type	Gas
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3187
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	19374
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2024-12-26
Spud Date	2025-08-30
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO 133H

API #	30-015-56151
API # +4	30-015-56151-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO 133H
Lease Number	335407
Lease Name	WATER BUFFALO
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.421091
Longitude	-104.273098
Well Type	Oil
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3203
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	19019
True Total Depth	0

Permit Date	2025-02-10
Approved Date	2025-02-10
Spud Date	9999-12-31
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO STATE COM 131H

API #	30-015-55969
API # +4	30-015-55969-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO STATE COM 131H
Lease Number	337699
Lease Name	WATER BUFFALO STATE COM
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.421092
Longitude	-104.272807
Well Type	Oil
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3201
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	19139
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2024-12-26
Spud Date	9999-12-31
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO 121H

API #	30-015-55968
API # +4	30-015-55968-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO 121H
Lease Number	335407
Lease Name	WATER BUFFALO
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.421090
Longitude	-104.273196
Well Type	Oil
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3201
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	17951
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2024-12-26
Spud Date	9999-12-31
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO 132H

API #	30-015-56150
API # +4	30-015-56150-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO 132H
Lease Number	335407
Lease Name	WATER BUFFALO
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419483
Longitude	-104.273858
Well Type	Oil
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3185
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	19051
True Total Depth	0

Permit Date	2025-02-10
Approved Date	2025-02-10
Spud Date	9999-12-31
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO 124H

API #	30-015-56111
API # +4	30-015-56111-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO 124H
Lease Number	335407
Lease Name	WATER BUFFALO
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419532
Longitude	-104.273780
Well Type	Oil
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3185
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	17548
True Total Depth	0

Permit Date	2024-12-26
Approved Date	2025-01-31
Spud Date	9999-12-31
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO 122H

API #	30-015-56153
API # +4	30-015-56153-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO 122H
Lease Number	335407
Lease Name	WATER BUFFALO
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419580
Longitude	-104.273701
Well Type	Oil
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3188
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	17716
True Total Depth	0

Permit Date	2025-02-10
Approved Date	2025-02-10
Spud Date	9999-12-31
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)

Full Details for WATER BUFFALO 123H

API #	30-015-56156
API # +4	30-015-56156-00-00
State	New Mexico
County	Eddy County
Well Name	WATER BUFFALO 123H
Lease Number	335407
Lease Name	WATER BUFFALO
Operator	Permian Resources Operating, LLC
Closest City	Happy Valley
Field / Formation	
Latitude	32.419629
Longitude	-104.273622
Well Type	Oil
Well Status	New
Well Direction	H
Section	3
Township	22S
Range	26E
QQ	
Abstract	
Survey	
Ground Level Elevation	3186
Derrick Level Elevation	
Kelly Bushing Elevation	
Drillers Total Depth	17428
True Total Depth	0

Permit Date	2025-02-10
Approved Date	2025-02-10
Spud Date	9999-12-31
Log Date	
Completion Date	
Test Date	
Production Date	
Last Activity Date	
Abandoned Date	
Shut In Date	
Plugged Date	9999-12-31
Recent Reporting Date	
Recently Reported Oil Prod	0 BBL
Recently Reported Gas Prod	0 MCF
Overall Production Dates Available	
Total Oil Production	0 BBL
Total Gas Production	0 MCF
Total Water Production	0 BBL
Estimated Daily Oil Production	0 BBL
Estimated Daily Gas Production	0 MCF
Estimated Daily Water Production	0 BBL
Estimated Monthly Oil Production	0 BBL
Estimated Monthly Gas Production	0 MCF
Estimated Monthly PBOE *	0 BBL
Estimated Maximum Daily Oil Production	N/A
Estimated Maximum Daily Gas Production	N/A
Estimated Maximum Daily PBOE *	N/A

* PBOE = Price Based Barrel of Oil Equivalent (Using a market based ratio of roughly 16:1)



Conveyance Document

Please note the following draft deed/assignment has been prepared by the seller in advance of sale. The successful buyer agrees to accept title to the lots pursuant to said deeds or assignments. Seller shall not be obligated or required to modify or change said deeds or assignments unless a correction is required to properly convey the interests being sold.

NOTICE OF CONFIDENTIALITY RIGHTS: IF YOU ARE A NATURAL PERSON, YOU MAY REMOVE OR STRIKE ANY OR ALL OF THE FOLLOWING INFORMATION FROM ANY INSTRUMENT THAT TRANSFERS AN INTEREST IN REAL PROPERTY BEFORE IT IS FILED FOR RECORD IN THE PUBLIC RECORDS: YOUR SOCIAL SECURITY NUMBER OR YOUR DRIVER'S LICENSE NUMBER.

ROYALTY DEED

STATE OF NEW MEXICO

§

§

KNOWN ALL MEN BY THESE PRESENTS:

COUNTY OF EDDY

§

_____, whose address is _____, (“Grantor”), for One Hundred Dollars (\$100.00) and other good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, hereby GRANTS, SELLS, CONVEYS, and ASSIGNS unto

(“Grantee”), **25% of 100% held as of August 1, 2026** of Grantor’s right, title, and interest in and to the oil, gas, and mineral interests, royalty interests, overriding royalty interests, and other interests in and to those certain lands (“Lands”) described below and located in Eddy County, New Mexico:

Tract 1: That certain tract or parcel of land containing 0.2083 acres, more or less, being more particularly described as the East 55 feet of Lot 7, Block 15, Greene's Highland, situated in the Southeast Quarter (SE/4) of Section 1, Township 22 South, Range 26 East, Eddy County, New Mexico, and being further depicted on that certain Map of Greene's Highland to Eddy Addition, New Mexico, dedicated December 9, 1891 and recorded in Map Cabinet 1, Slide 3 of the Map Records of and for Eddy County, New Mexico.

Tract 2: That certain tract or parcel of land containing 0.1709 acres, more or less, being more particularly described as Lot 3, Block 197, Powers Addition (Amended), situated in the Northeast Quarter (NE/4) of Section 1, Township 22 South, Range 26 East, Eddy County, New Mexico, and being further depicted on that certain Amended Plat of Lots 3 & 5 Block 197 Powers Amended Carlsbad, N.M., dedicated September 25, 1961, and recorded in Map Cabinet 1, Slide 251 of the Map Records of and for Eddy County, New Mexico.

Grantor further excepts from this conveyance and reserves unto Grantor all of Grantor’s right, title and interest in and to any after-acquired title, remainderman and reversionary interests.

Lot #_____

This sale is made subject to all prior conveyances of mineral, royalty or wellbore interests of record, if any, and further subject to any rights now existing to any lessee or assigns under any valid and subsisting oil, gas, and mineral lease(s) of record heretofore executed; it being understood and agreed that said Grantee shall have, receive, and enjoy the herein-granted undivided interests in and to all royalties and other benefits which may accrue under the terms of said lease(s) insofar as the lease(s) covers the above-described interests from and after the Effective Date hereof.

Grantor agrees to execute such further assurances as may be necessary or requisite for the full and complete enjoyment of the rights herein granted. Grantor and Grantee agree to execute any Acts of Correction that may be necessary in the event the interests intended to be conveyed are not properly described.

TO HAVE AND TO HOLD the above-described interests and all other rights herein granted, all and singular, the rights and appurtenances thereto belonging or appertaining. The terms, covenants and conditions contained in this Royalty Deed shall be binding upon the inure to the benefit of the parties and their respective heirs, successors and assigns.

The interests conveyed herein are conveyed without warranty, express or implied, and all covenants that may arise under common law or statute are hereby disclaimed.

EXECUTED on the acknowledgment date below, but **EFFECTIVE** as of **September 1, 2026** (the "Effective Date") and therefore Grantee is entitled to the interests conveyed hereby on and after the Effective Date, but not before.

Grantor:

[REDACTED]

DIRECT ACKNOWLEDGEMENT

STATE OF NEW MEXICO
COUNTY OF SANTA FE

This instrument was acknowledged before me on this the _____ of _____, 2026, by

[REDACTED]

IN WITNESS HEREOF, I have hereunto set my hand and official seal on the day and year first above written. SEAL

Signature of Notary

Name of Notary

Lot # _____